



VINYL LIGHT TRAFFIC

TX

TX Standing	p. 48
TX Modulaire	p. 56
TX Selection	p. 62
TX Classic	p. 66

Nordic Stabil Plus & Nordic Stabil

Nordic Stabil Plus	p. 72
Nordic Stabil	p. 74



OUR SELECTION OF ACCESSORIES FOR VINYL LIGHT TRAFFIC



1

Transition profile
TMT
Aluminium profile used
at doorstep to join
different floorings.

See p.572 for detailed info



2

Set-on skirting
KS61
PVC semi-rigid skirting
for decorative use.

See p. 566 for detailed info




3

Cold welding
Watertight join to prevent
any penetration of water
and secure the installation.

See p. 562 for detailed info

VINYL LIGHT TRAFFIC

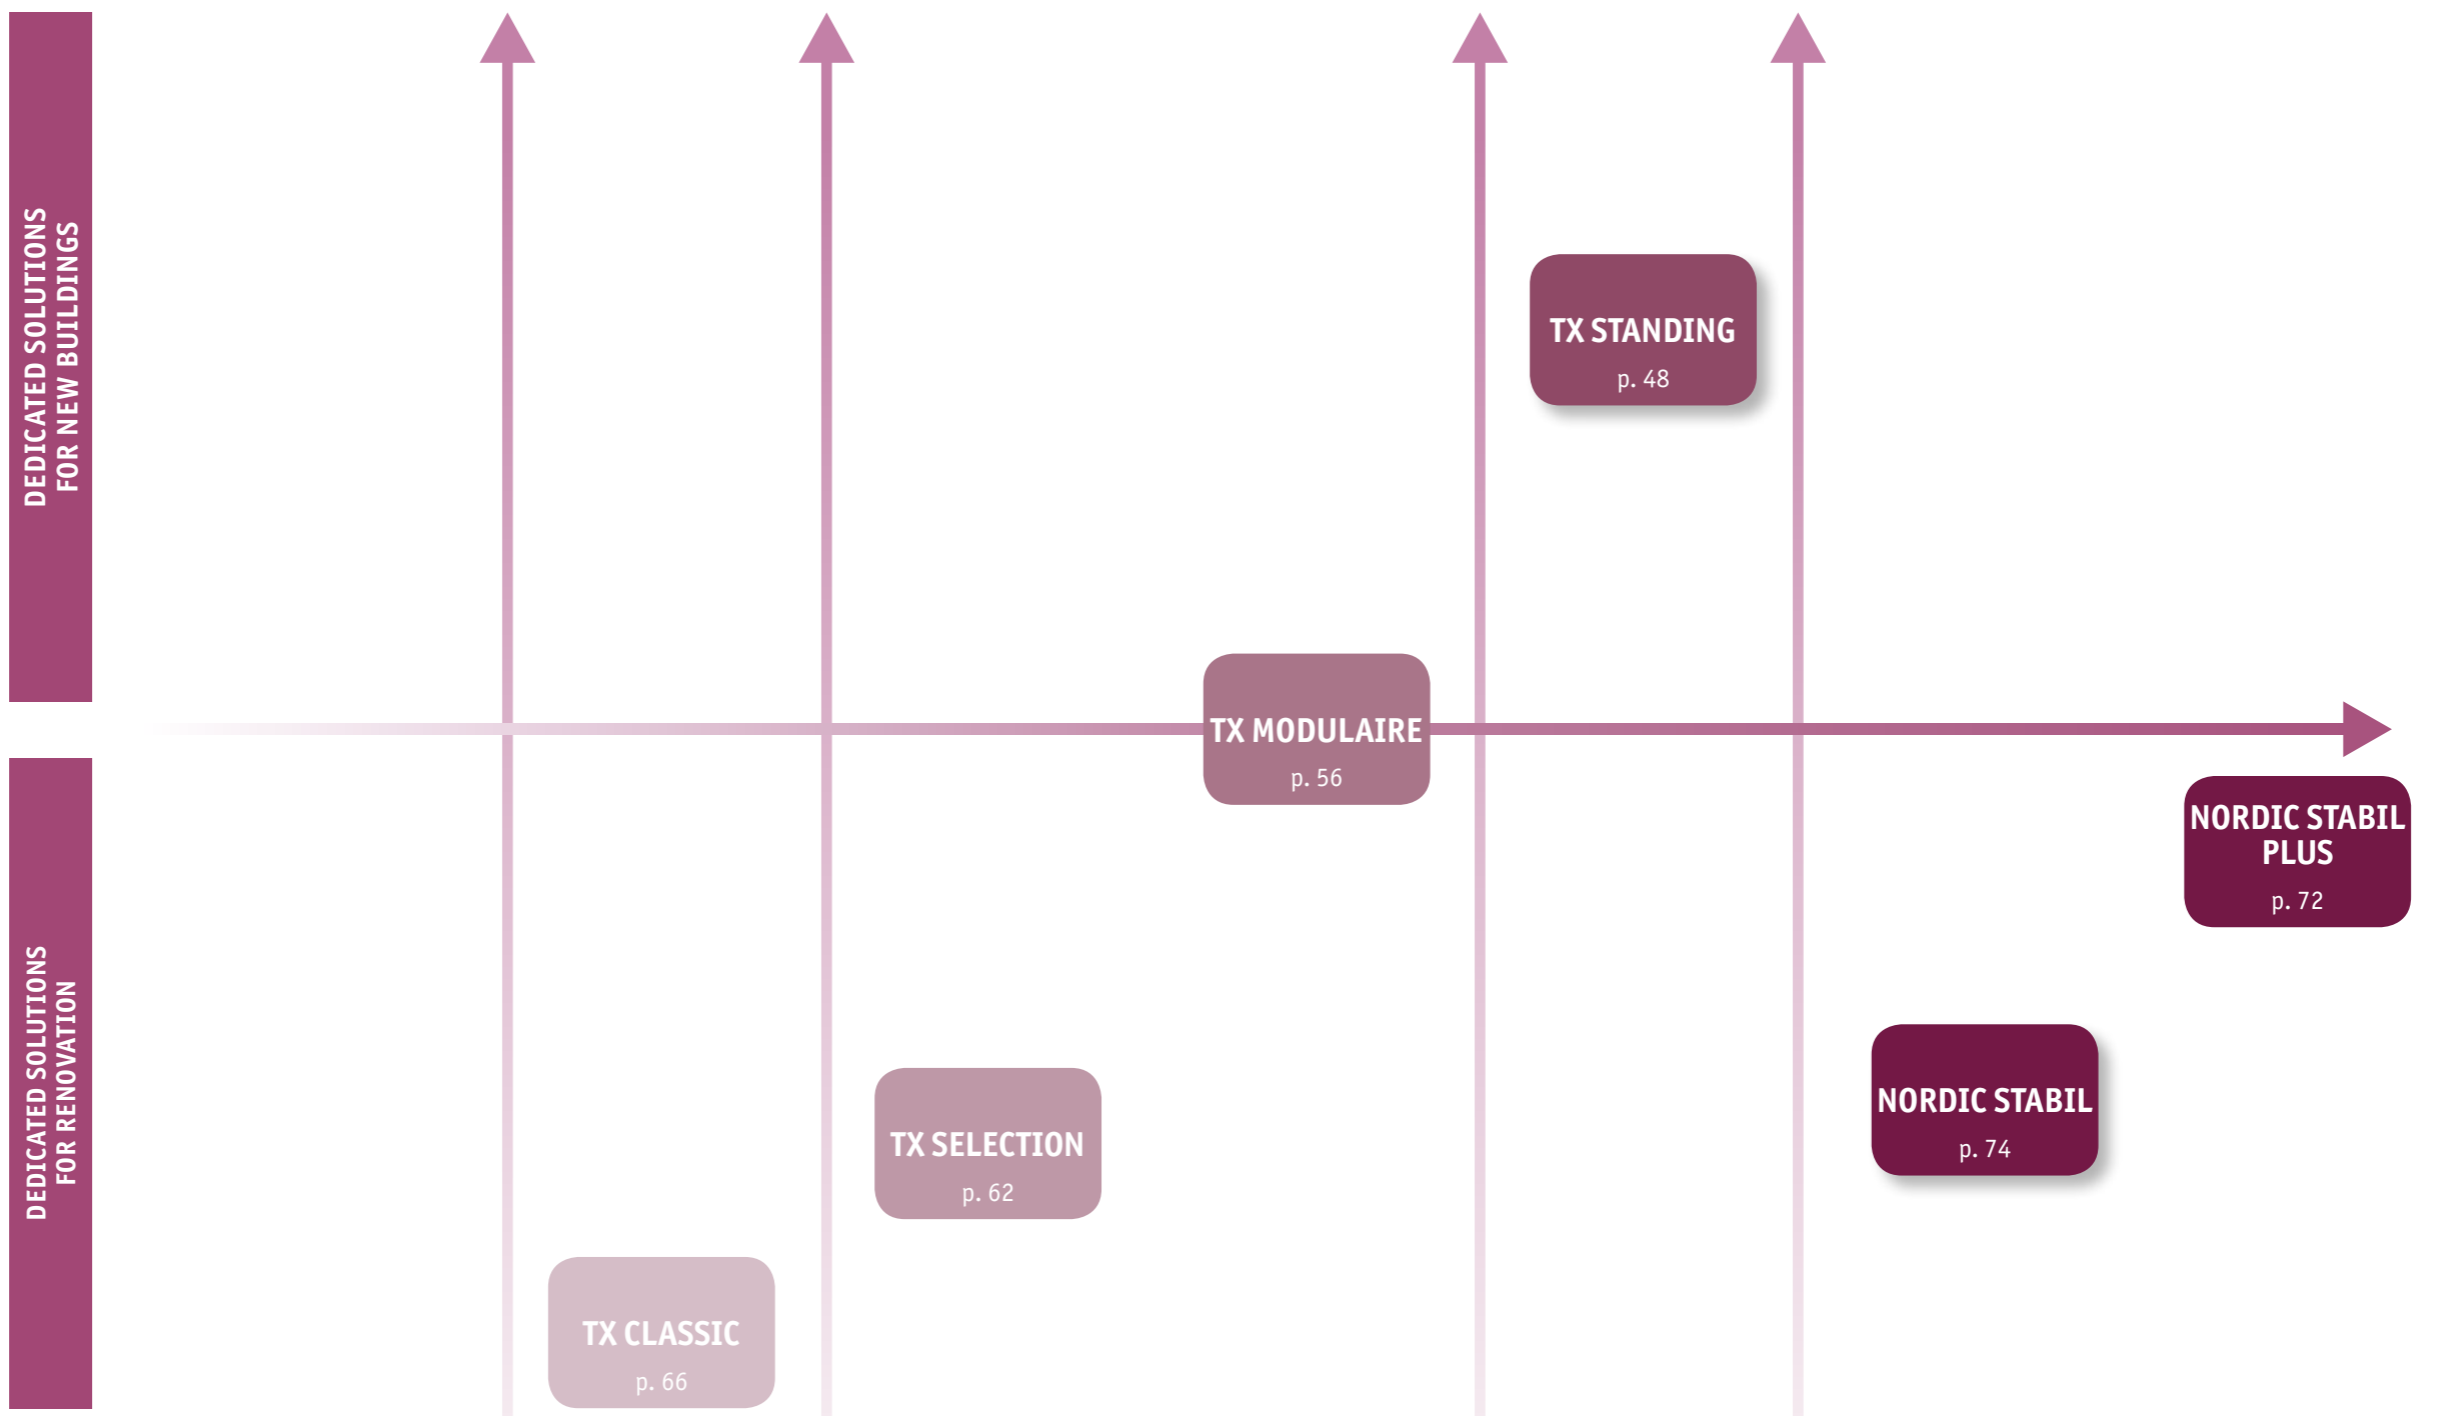

	TX Classic 2m / 4m	TX Selection 2m / 4m	TX Modulaire Tile & Plank	TX Standing 2m	Nordic Stabil 2m / 4m	Nordic Stabil plus 2m / 4m
Total thickness (mm)	2.60	3.30	3.05	3.25	2.80	2.50
Wear layer (mm)	0.25	0.45	0.27	0.27	0.35	0.35
Acoustic (dB)	19	20	20	20	18	18
Residual indentation (mm)	0.35	0.14	0.12	0.12	0.25	0.20
Best measured value (mm)		0.12	0.10	0.10		

TX STANDING



The ideal solution for housing renovations in timeless designs

SENSORY BENEFITS

- Wide range of 58 colours and 11 designs
- New embossing technology for a truly matt surface look

FUNCTIONAL BENEFITS


- Improved acoustic performance (up to 20dB)
- Low residual indentation

ENVIRONMENTAL BENEFITS

- Phthalate-free technology
- Part of the ReStart® programme

TECHNICAL DATA	STANDARDS	TX Standing
		2m
Classification		
Type of floor covering	ISO 11638 (EN 651)	
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31
Characteristics		
Total thickness	ISO 24346 (EN 428)	3.25mm
Wear layer thickness	ISO 24340 (EN 429)	0.27mm
Total weight	ISO 23997 (EN 430)	2 920g/m ²
PUR Reinforcement	-	TopClean XP™
Wear layer binder content	ISO 11638	Type I
Technical performance		
Residual indentation	Average measured value	Average at 0.12mm with the best value at 0.1mm
	ISO 24343-1 (EN 433)	≤ 20mm
Reaction to fire	EN 13501-1	B _s s1 glued over any A ₂ or A ₁ substrate (concrete) & B _s s1 glued over any derivate wood substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ Ω
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 10140-3 (EN 717-2)	20dB
Acoustic improvement	NF S31-074	L _{n,e,w} < 65dB
Form of delivery	ISO 24341 (EN 426)	Rolls: 25lm x 2m
	ISO 24342 (EN 427)	

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

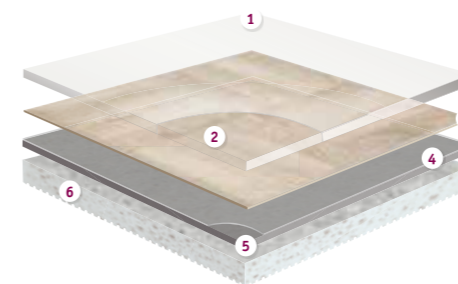

TX STANDING

- 1 TopClean XP™ PUR reinforcement:** very high resistance to scratches and easy maintenance
- 2 Pure PVC transparent wear layer:** resistance to abrasion
- 3 High definition print:** for perfect designs
- 4 Glass fibre non-woven reinforcement:** superior dimensional stability
- 5 Solid homogeneous calendered sheet of recycled vinyl:** resistance to indentation and tearing
- 6 High density closed-cell foam backing:** sound reduction and comfort underfoot



TX STANDING



Seaside Wood - Beige



Legacy Oak



Light Oak



Minimal Wood: Also available in TX Modulaire



Oak Tree: Also available in TX Modulaire



TECHNICAL DATA	STANDARDS	TX Standing
		2m
Classification		
Type of floor covering	ISO 11638 (EN 651)	
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31
Characteristics		
Total thickness	ISO 24346 (EN 428)	3.25mm
Wear layer thickness	ISO 24340 (EN 429)	0.27mm
Total weight	ISO 23997 (EN 430)	2 920g/m ²
PUR Reinforcement	-	TopClean XP™
Wear layer binder content	ISO 11638	Type I
Technical performance		
Residual indentation	Average measured value	Average at 0.12mm with the best value at 0.1mm
	ISO 24343-1 (EN 433)	≤ 20mm
Reaction to fire	EN 13501-1	B _n s ₁ glued over any A ₂ or A ₁ substrate (concrete) & B _n s ₁ glued over any derivate wood substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ Ω
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 10140-3 (EN 717-2)	20dB
Acoustic improvement	NF S31-074	L _{n,e,w} < 65dB

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

Seaside Wood



TX STANDING

Main Product Features

- New and innovative designs, especially developed for social housing
- New embossing technology giving the product a very matt surface aspect
- 20dB sound absorption
- Best score in the market for residual indentation

Surface Treatment




Sustainability Tag




Logistics Information

Available in rolls: 2m
Rolls length: 25lm



General Information



According to European Classification ISO 10874 (EN 685)



TX STANDING



Oak Tree - Dark



French Oak




Moon: Also available in TX Modulaire



TECHNICAL DATA	STANDARDS	TX Standing
		2m
Classification		
Type of floor covering	ISO 11638 (EN 651)	
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31
Characteristics		
Total thickness	ISO 24346 (EN 428)	3.25mm
Wear layer thickness	ISO 24340 (EN 429)	0.27mm
Total weight	ISO 23997 (EN 430)	2 920g/m ²
PUR Reinforcement	-	TopClean XP™
Wear layer binder content	ISO 11638	Type I
Technical performance		
Residual indentation	Average measured value	Average at 0.12mm with the best value at 0.1mm
	ISO 24343-1 (EN 433)	≤ 20mm
Reaction to fire	EN 13501-1	B _n s1 glued over any A2, or A1 _n substrate (concrete) & B _n s1 glued over any derivate wood substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ Ω
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 10140-3 (EN 717-2)	20dB
Acoustic improvement	NF S31-074	L _{n,e,w} < 65dB

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

Moon

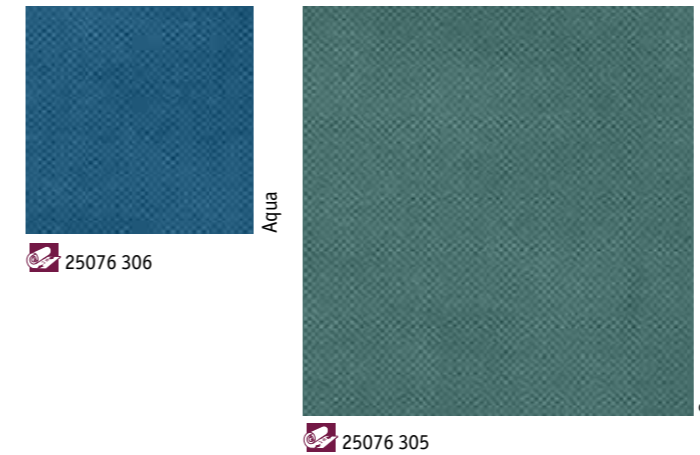

TX STANDING

Main Product Features

- New and innovative designs, especially developed for social housing
- New embossing technology giving the product a very matt surface aspect
- 20dB sound absorption
- Best score in the market for residual indentation

Surface Treatment




Sustainability Tag




Logistics Information

Available in rolls: 2m
Rolls length: 25lm



General Information



According to European Classification ISO 10874 (EN 685)




TX STANDING



Minimal Wood - Natural



Textile

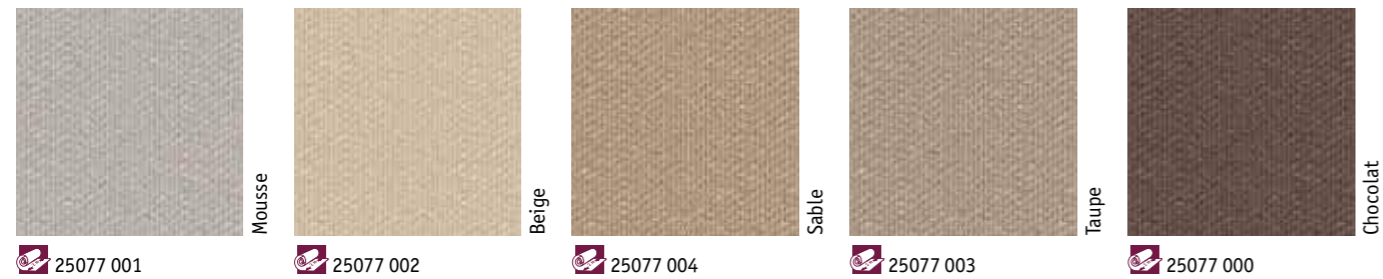

Fiber Wood: Also available in TX Modulaire



Cement: Also available in TX Modulaire



TECHNICAL DATA	STANDARDS	TX Standing
		2m
Classification		
Type of floor covering	ISO 11638 (EN 651)	
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31
Characteristics		
Total thickness	ISO 24346 (EN 428)	3.25mm
Wear layer thickness	ISO 24340 (EN 429)	0.27mm
Total weight	ISO 23997 (EN 430)	2 920g/m ²
PUR Reinforcement	-	TopClean XP™
Wear layer binder content	ISO 11638	Type I
Technical performance		
Residual indentation	Average measured value	Average at 0.12mm with the best value at 0.1mm
	ISO 24343-1 (EN 433)	≤ 20mm
Reaction to fire	EN 13501-1	B _n s1 glued over any A2, or A1 _n substrate (concrete) & B _n s1 glued over any derivate wood substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ Ω
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 10140-3 (EN 717-2)	20dB
Acoustic improvement	NF S31-074	L _{n,e,w} < 65dB

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

TX STANDING

Main Product Features

- New and innovative designs, especially developed for social housing
- New embossing technology giving the product a very matt surface aspect
- 20dB sound absorption
- Best score in the market for residual indentation

Surface Treatment




Sustainability Tag



Logistics Information

Available in rolls: 2m
Rolls length: 251m



General Information



According to European Classification ISO 10874 (EN 685)

Tisse



TX MODULAIRE



The ideal acoustic solution for housing renovations

SENSORY BENEFITS

- Wide range of colours and designs reflecting the latest decor trends

FUNCTIONAL BENEFITS


- Range available in roll, plank and tile format for greater creativity
- Improved acoustic performance (up to 20db)

ENVIRONMENTAL BENEFITS

- TopClean XP™ protection means easier care with fewer chemicals and cleaning solvents
- Low VOC emissions contributes to better indoor air quality
- Phthalate-free technology
- Part of the ReStart® programme

TECHNICAL DATA	STANDARDS	TX Modulaire	
		Tile	Plank
Classification			
Type of floor covering	ISO 11638 (EN 651)		
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31	
Characteristics			
Total thickness	ISO 24346 (EN 428)	3.05mm	
Wear layer thickness	ISO 24340 (EN 429)	0.27mm	
Total weight	ISO 23997 (EN 430)	2 575g/m ²	
PUR Reinforcement	-	TopClean XP™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	0.12mm	
	Best measured value	0.10mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.25mm	
Reaction to fire	EN 13501-1	B _{s1} s1 glued over any A2 _{s1} or A1 _{s1} substrate (concrete) & C _{s1} s1 glued over any derivate wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30	
Dimensional stability	ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	ISO 23999 (EN 434)	< 2mm	
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete support R1 > 10 ⁹ Ω	
Chemical resistance	ISO 26987 (EN 423)	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable	
Light fastness	EN ISO 105-B02	> 6	
Impact sound reduction	EN ISO 717/2	ΔL _w = 20dB	
Acoustic improvement	NF S31-074	L _{n,r,w} < 65dB	
Form of delivery	ISO 24341 (EN 426)	33,33x33,33cm	25x100cm
	ISO 24342 (EN 427)	50x50cm	

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

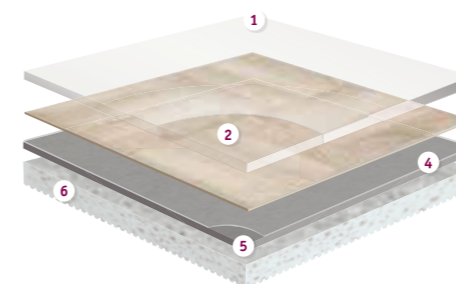

TX MODULAIRE

- TopClean XP™ PUR reinforcement:** very high resistance to scratches and easy maintenance
- Pure PVC transparent wear layer:** resistance to abrasion
- High definition print:** for perfect designs
- Glass fibre non-woven reinforcement:** superior dimensional stability
- Solid homogeneous calendared sheet made of recycled vinyl:** resistance to indentation and tearing
- High density closed-cell foam backing:** sound reduction and comfort underfoot




TX MODULAIRE



Cement - Grey, Dark



Parquet Bloc



Naturel

24083 201



Blanc

24083 202



Grey

24083 203

Weathered Oak



Light Natural

24080 007



Light

24080 002

Cascade



Grege

24082 018

Esquisse



Beige

24082 025



Gris

24082 028

Comblanchien



Brun

24082 020

Sahara



Sable

24082 003

Mineral



Gris

24082 004



Sable


24082 001



Porphyre


24082 002

Minimal Wood: Also available in TX Standing



Grege

25079 103




Dark

25079 102



Beige

25079 100




Natural

25079 101

TECHNICAL DATA	STANDARDS	TX Modulaire
Classification		
Type of floor covering	ISO 11638 (EN 651)	
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31
Characteristics		
Total thickness	ISO 24346 (EN 428)	3.05mm
Wear layer thickness	ISO 24340 (EN 429)	0.27mm
Total weight	ISO 23997 (EN 430)	2 575g/m ²
PUR Reinforcement	-	TopClean XP™
Wear layer binder content	ISO 11638	Type I
Technical performance		
Residual indentation	Average measured value	0.12mm
	Best measured value	0.10mm
	ISO 24343-1 (EN 433) requirement	≤ 0.25mm
Reaction to fire	EN 13501-1	B _n s1 glued over any A2 _s or A1 _s substrate (concrete) & C _n s1 glued over any derivate wood substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	< 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	< 2mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete support R1 > 10 ⁹ Ω
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	> 6
Impact sound reduction	EN ISO 717/2	ΔLw = 20dB
Acoustic improvement	NF S31-074	L _{n,w} < 65dB

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

Oak

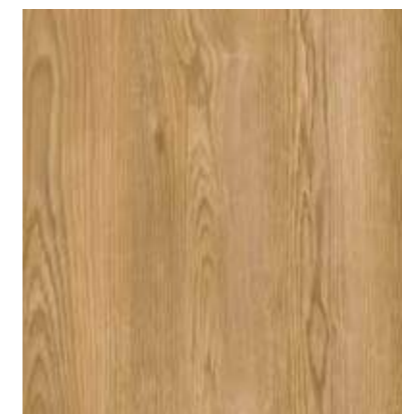

Light

24081 002

TX MODULAIRE

Main Product Features

- Dedicated Modulaire offer in planks and tiles
- Combination of classic and innovative designs and colors
- 20dB sound absorption
- Best score in the market for residual indentation

Surface Treatment




Sustainability Tag



Logistics Information



Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)




TX MODULAIRE




Oak Tree - Snow



Oak Tree: Also available in TX Standing

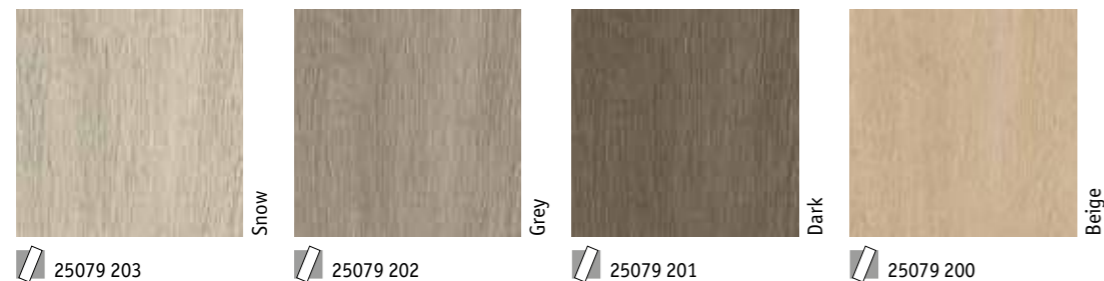


Moon: Also available in TX Standing

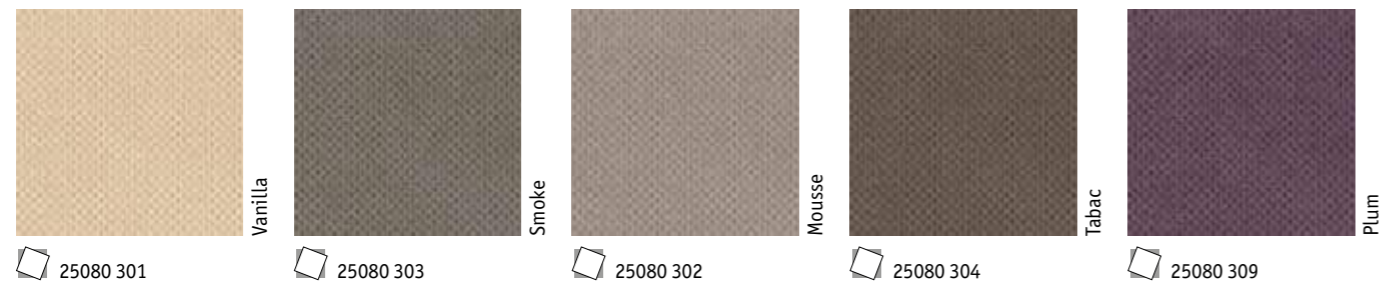

Fiber Wood: Also available in TX Standing



Cement: Also available in TX Standing

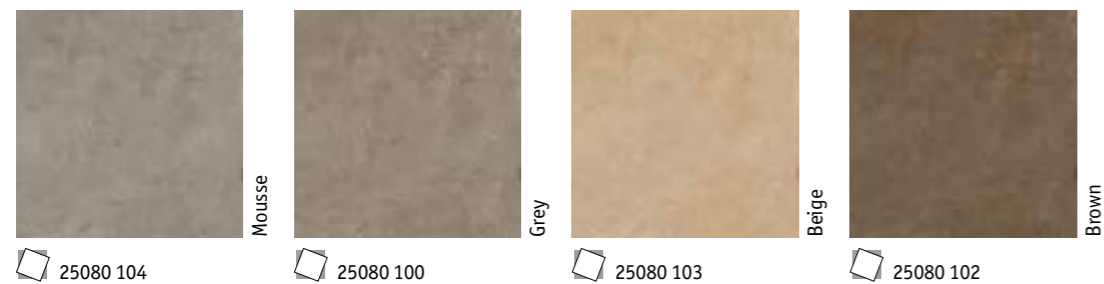

TECHNICAL DATA	STANDARDS	TX Modulaire
Classification		
Type of floor covering	ISO 11638 (EN 651)	
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31
Characteristics		
Total thickness	ISO 24346 (EN 428)	3.05mm
Wear layer thickness	ISO 24340 (EN 429)	0.27mm
Total weight	ISO 23997 (EN 430)	2 575g/m ²
PUR Reinforcement	-	TopClean XP™
Wear layer binder content	ISO 11638	Type I
Technical performance		
Residual indentation	Average measured value	0.12mm
	Best measured value	0.10mm
	ISO 24343-1 (EN 433) requirement	≤ 0.25mm
Reaction to fire	EN 13501-1	B _n s1 glued over any A2 _s or A1 _s substrate (concrete) & C _n s1 glued over any derivate wood substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	< 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	< 2mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete support R1 > 10 ⁹ Ω
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	> 6
Impact sound reduction	EN ISO 717/2	ΔLw = 20dB
Acoustic improvement	NF S31-074	L _{n,e,w} < 65dB

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

Cement: Also available in TX Standing



25080 101

TX MODULAIRE

Main Product Features

- Dedicated Modulaire offer in planks and tiles
- Combination of classic and innovative designs and colors
- 20dB sound absorption
- Best score in the market for residual indentation

Surface Treatment




Sustainability Tag





Logistics Information



Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)



TX SELECTION



The ideal solution for housing renovations in timeless designs

SENSORY BENEFITS

- Timeless designs and colours for an interior that's never out of style

FUNCTIONAL BENEFITS


- Range available in 2m and 4m formats for seamless installation in every room
- Improved acoustic performance of up to 20dB
- Low residual indentation

ENVIRONMENTAL BENEFITS

- PU protection means easier care with fewer chemicals and cleaning solvents
- Low VOC emissions contribute to better indoor air quality
- Phthalate-free technology
- Part of the ReStart® programme

TECHNICAL DATA	STANDARDS	TX Selection	
		2m	4m
Classification			
Type of floor covering	EN ISO 11638		
Classification	EN ISO 10874 domestic commercial	Classes: 23 31	
Characteristics			
Total thickness	EN ISO 24346	3.30mm	
Wear layer thickness	EN ISO 24340	0.45mm	
Total weight	EN ISO 23997	2 400g/m ²	
PUR Reinforcement	-	TopClean™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	0.14mm	
	Best measured value	0.12mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.35mm	
Reaction to fire	EN 13501-1	C _s s1 glued over any A2 _s or A1 _s substrate (concrete) and on any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.30	
Dimensional stability	EN ISO 23999	≤ 0.10%	
Furniture leg	EN 424	No damage	
Effect of castor chair	ISO 4918 - EN 425	No damage	
Curl resultant to heat	EN ISO 23999	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	≤ 2kV R1 > 10 ⁹ Ω	
Chemical resistance	EN ISO 26987	High resistance	
Thermal resistance Underfloor heating	EN ISO 10456	0.05m ² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 717/2	ΔL _w = 20dB	
Acoustic improvement		L _{n,e,w} < 65dB	
Dimensions		Rolls: 25lm x 2m	Rolls: 25lm x 4m
Colors		Wood: 12 Kiruma: 6 Akira: 4	Wood: 12 Kiruma: 6 Akira: 4

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

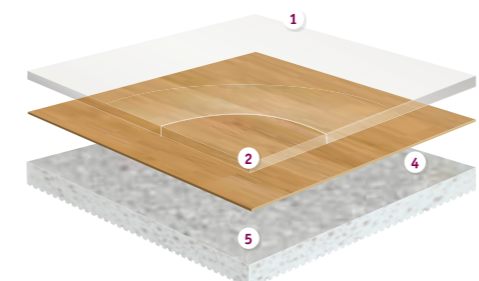

TX SELECTION

- TopClean™ PUR reinforcement:** high resistance to scratches and easy maintenance
- Pure PVC transparent wear layer:** resistance to abrasion
- High definition print:** for perfect designs
- Saturated glass fibre reinforcement:** superior dimensional stability
- High density closed-cell foam backing:** sound reduction and comfort underfoot



TX SELECTION



Hetre Fayard - Moyen



Hetre Fayard



Light

24103 002
24102 002



Moyen

24103 001
24102 001

Trend Oak



Snow Grey

24103 007
24102 007



Snow Dore

24103 005
24102 005



Snow White

24103 006
24102 006

Rustic Oak



Blanchi

24103 003
24102 003



Naturel

24103 004
24102 004

Arcadia



Grege

24103 009
24102 009



Beige

24103 008
24102 008



Sable

24103 010
24102 010

Kiruma



Blanc

24103 020
24102 020



Clair

24103 021
24102 021



Grege

24103 019
24102 019



Gris

24103 017
24102 017



Anthracite

24103 018
24102 018

Akira



Beige

24103 014
24102 014



Mousse

24103 013
24102 013



Gris

24103 012
24102 012



Chocolat

24103 011
24102 011

TECHNICAL DATA	STANDARDS	TX Selection	
		2m	4m
Classification			
Type of floor covering	EN ISO 11638		
Classification	EN ISO 10874 domestic commercial	Classes: 23 31	
Characteristics			
Total thickness	EN ISO 24346	3.30mm	
Wear layer thickness	EN ISO 24340	0.45mm	
Total weight	EN ISO 23997	2 400g/m ²	
PUR Reinforcement	-	TopClean™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	0.14mm	
	Best measured value	0.12mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.35mm	
Reaction to fire	EN 13501-1	C _n s1 glued over any A2 _n or A1 _n substrate (concrete) and on any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.30	
Dimensional stability	EN ISO 23999	≤ 0.10%	
Furniture leg	EN 424	No damage	
Effect of castor chair	ISO 4918 - EN 425	No damage	
Curl resultant to heat	EN ISO 23999	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	≤ 2kV R1 > 10 ⁹ Ω	
Chemical resistance	EN ISO 26987	High resistance	
Thermal resistance Underfloor heating	EN ISO 10456	0.05m ² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 717/2	ΔL _w = 20dB	
Acoustic improvement		L _{n,w} < 65dB	

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

Cuba



Brosse

24103 015
24102 015



Grey

24103 016
24102 016

TX SELECTION

Main Product Features

- Classic colors and designs that match existing floors
- Available in 2m and 4m width to allow seamless installation in every room
- 20dB sound absorption
- Low residual indentation

Surface Treatment



Sustainability Tag




Logistics Information





Available in rolls: 2 & 4m
Rolls length: 25m

Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)



TX CLASSIC



The ideal solution for housing renovations that offers great value for money

SENSORY BENEFITS

- Timeless designs and colours for an interior that's never out of style

FUNCTIONAL BENEFITS


- Range available in 2m and 4m formats for seamless installation in every room

ENVIRONMENTAL BENEFITS

- PU protection means easier care with fewer chemicals and cleaning solvents
- Low VOC emissions contributes to better indoor air quality

TECHNICAL DATA	STANDARDS	TX Classic	
		2m	4m
Classification			
Type of floor covering	EN ISO 11638	Heterogeneous Acoustic Vinyl	
Classification	EN ISO 10874 domestic commercial	Classes: 23 31	Classes: 23 31
Characteristics			
Total thickness	EN ISO 24346	2.60mm	
Wear layer thickness	EN ISO 24340	0.25mm	
Total weight	EN ISO 23997	1 800g/m ²	
PUR Reinforcement	-	TopClean™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	≤ 0.35mm	
	ISO 24343-1 (EN 433) requirement		
Reaction to fire	EN 13501-1	C _s ≤1 glued over any A2 _s or A1 _s substrate (concrete) C _s ≤1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30	
Dimensional stability	EN ISO 23999	≤ 0.10%	
Furniture leg	EN 424	No damage	
Effect of castor chair	EN ISO 4918	No damage	
Curl resultant to heat	ISO 23999 - EN 434	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms	
Chemical resistance	EN ISO 26987	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 10140-3 (EN 717-2)	ΔL _w = 19dB	
Acoustic improvement	NF S 31-074	L _{n,e,w} < 65dB Class A	
Dimensions	ISO 24341 (EN 426)	Rolls: 25lm x 2m	Rolls: 25lm x 4m
	EN ISO 24342		
Colours		Castel: 6 Wood: 4	Castel: 6 Wood: 4

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

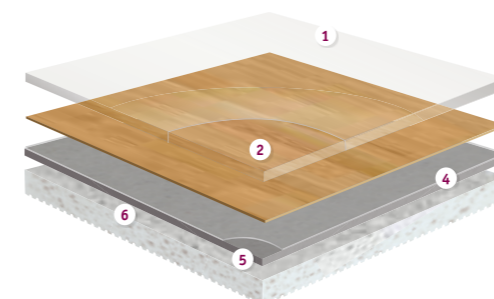

TX CLASSIC

- TopClean™ PUR reinforcement:** very high resistance to scratches and easy maintenance
- Pure PVC transparent wear layer:** resistance to abrasion
- High definition print:** for perfect designs
- Glass fibre non-woven reinforcement:** superior dimensional stability
- Solid homogeneous calandered sheet made of recycled vinyl:** resistance to indentation and tearing
- High density closed-cell foam backing:** sound reduction and comfort underfoot



TX CLASSIC



Gea



Castel



Chambord

3503 013
3505 008




Chantilly

3503 014
3505 011




Amboise

3503 033



Chenonceau

3503 034
3505 034



Cheverny

3503 035
3505 035

Gea




3503 030
3505 030

Oak



3503 031
3505 031

Beech



3503 024
3505 024



3503 025
3505 025

TECHNICAL DATA	STANDARDS	TX Classic	
		2m	4m
Classification			
Type of floor covering	EN ISO 11638	Heterogeneous Acoustic Vinyl	
Classification	EN ISO 10874 domestic commercial	Classes: 23 31	Classes: 23 31
Characteristics			
Total thickness	EN ISO 24346	2.60mm	
Wear layer thickness	EN ISO 24340	0.25mm	
Total weight	EN ISO 23997	1 800g/m ²	
PUR Reinforcement	-	TopClean™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	≤ 0.35mm	
	ISO 24343-1 (EN 433) requirement		
Reaction to fire	EN 13501-1	C _s s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) C _n s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30	
Dimensional stability	EN ISO 23999	≤ 0.10%	
Furniture leg	EN 424	No damage	
Effect of castor chair	EN ISO 4918	No damage	
Curl resultant to heat	ISO 23999 - EN 434	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms	
Chemical resistance	EN ISO 26987	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 10140-3 (EN 717-2)	ΔL _w = 19dB	
Acoustic improvement	NF S 31-074	L _{n,r,w} < 65dB Class A	

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

Castel



Blois

3503 001
3505 009

TX CLASSIC Stone, Wood

Main Product Features

- Higher sound absorption (19dB)
- Good indentation and traffic resistance
- Available in 2 and 4m
- Low cost and easy maintenance with PU protection

Surface Treatment



Sustainability Tag




Logistics Information




Available in rolls: 2 & 4m
Rolls length: 25lm

Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)



NORDIC STABIL PLUS & NORDIC STABIL



Enhanced sound absorption and walking comfort over legacy flooring or uneven subfloors

SENSORY BENEFITS

- Improved sound absorption
- Superior walking comfort
- Insulation helps retain in-room warmth

FUNCTIONAL BENEFITS


- Easy installation over an existing floor or uneven subfloor
- Available in 2m and 4m widths

ENVIRONMENTAL BENEFITS

- PU protection reduces the need for chemicals or cleaning solvents in maintenance
- Low VOC emissions contributes to better indoor air quality


TECHNICAL DATA	STANDARDS	Nordic Stabil Plus	Nordic Stabil
Classification			
Type of floor covering	ISO 11638 (EN 651)	Heterogeneous Acoustic Vinyl	
Classification	ISO 10874 (EN 685) domestic commercial industrial	Classes: - 32 41	Classes: 23 31 -
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.50mm	2.80mm
Wear layer thickness	ISO 24340 (EN 429)	0.35mm	
Total weight	ISO 23997 (EN 430)	1 750g/m ²	1 860g/m ²
PUR Reinforcement	-	TopClean XP™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	0.20mm	0.25mm
	ISO 24343-1 (EN 433) requirement	≤ 0.35mm	≤ 0.35mm
Reaction to fire	EN 13501-1	C _n s1 glued over any A2 _s or A1 _s substrate (concrete) C _n s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%	< 0.10%
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ ohms	
Chemical resistance	ISO 26987 (EN 423)	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.05 m ² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 717/2	ΔL _v = 18dB	
Form of delivery			
Form of delivery	ISO 24341 (EN 426)	Rolls: 25lm x 2m Rolls: 25lm x 4m	Rolls: 25lm x 2m Rolls: 25lm x 4m
Colours			
Colours		8	20

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

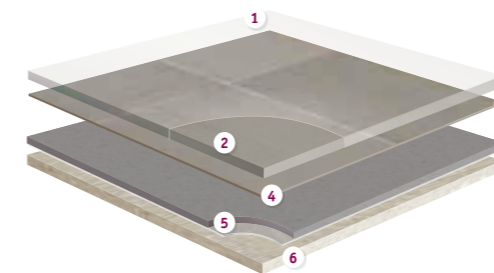

NORDIC STABIL PLUS

- TopClean XP™ PUR reinforcement:** very high resistance to scratches and easy maintenance
- Pure PVC transparent wear layer:** protects the design and improves durability
- Design layer:** offers a large choice of colours and patterns
- Compact layer:** resistance to indentation and tearing
- Glass-fibre non-woven reinforcement:** superior dimensional stability
- Textile backing:** ideal when installing on uneven sub floors. Optimises sound insulation and walking comfort

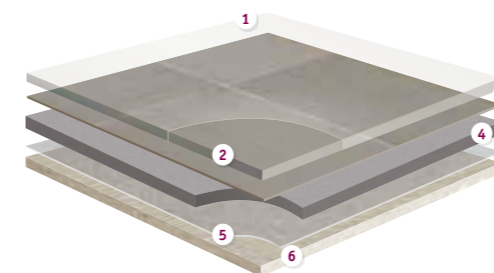

NORDIC STABIL

- TopClean XP™ PUR reinforcement:** very high resistance to scratches and easy maintenance
- Pure PVC transparent wear layer:** protects the design and improves durability
- Design layer:** offers a large choice of colours and patterns
- Foam layer:** adds warmth and comfort underfoot, and provides acoustic insulation
- Glass-fibre non-woven reinforcement:** superior dimensional stability
- Textile backing:** ideal when installing on uneven sub floors. Optimises sound insulation and walking comfort



NORDIC STABIL PLUS




Wood - French Oak Natural



Wood



Costa Rica

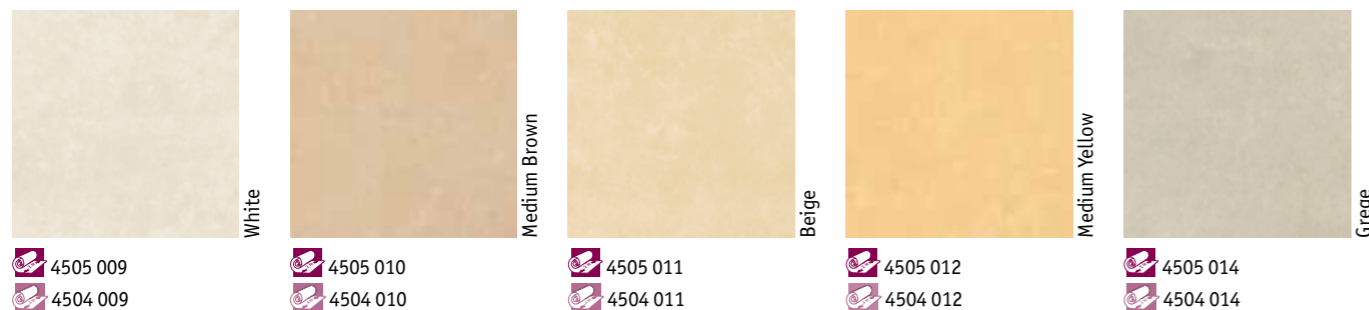

TECHNICAL DATA	STANDARDS	Nordic Stabil Plus	
		2m	4m
Classification			
Type of floor covering	ISO 11638 (EN 651)	Heterogeneous Acoustic Vinyl	
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 32 41	
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.50mm	
Wear layer thickness	ISO 24340 (EN 429)	0.35mm	
Total weight	ISO 23997 (EN 430)	1 750g/m ²	
PUR Reinforcement	-	TopClean XP™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	0.20mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.35mm	
Reaction to fire	EN 13501-1	C _n s1 glued over any A2 _n or A1 _n substrate (concrete) C _n s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Dimensional stability	ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ ohms	
Chemical resistance	ISO 26987 (EN 423)	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.05m ² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 717/2	ΔL _w = 18dB	

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

NORDIC STABIL PLUS

Main Product Features

- Acoustic, walking and thermic comfort
- Easy and quick to install over an existing or uneven subfloor without levelling compound
- Available in 2m and 4m
- Low cost and easy maintenance with PU protection

Surface Treatment



Sustainability Tag




Logistics Information



Available in rolls: 2 & 4m
Rolls length: 25lm

Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)



NORDIC STABIL



Square - Black & White



Wood



Wild Oak Light

3532 044
3536 044



Classic Oak Grey

3532 026
3536 026



French Oak Medium Beige

3532 028
3536 028



French Oak Light Brown

3532 027
3536 027

Square



Black & White

3532 022
3536 022

Gea



Light Natural

3532 029
3536 059



Grey

3532 031
3536 031



Light Grey

3532 030
3536 030



Blanc

3532 036
3536 036



Light Grey

3532 037
3536 037

Selene




Light Grey

3532 034
3536 034



Grey

3532 035
3536 035



Medium Beige

3532 032
3536 032



Anthracite

3532 033
3536 033

Kiruma



Light Beige

3532 039
3536 039



Warm Beige

3532 038
3536 038



Light

3532 043
3536 043



Grey

3532 042
3536 042



Dark Grey

3532 041
3536 041

TECHNICAL DATA	STANDARDS	Nordic Stabil	
		2m	4m
Classification			
Type of floor covering	ISO 11638 (EN 651)	Heterogeneous Acoustic Vinyl	
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31	
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.80mm	
Wear layer thickness	ISO 24340 (EN 429)	0.35mm	
Total weight	ISO 23997 (EN 430)	1 860g/m ²	
PUR Reinforcement	-	TopClean XP™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	0.25mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.35mm	
Reaction to fire	EN 13501-1	C _n s1 glued over any A2 _n or A1 _n substrate (concrete) C _n s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Dimensional stability	ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ ohms	
Chemical resistance	ISO 26987 (EN 423)	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.05m ² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 717/2	ΔL _w = 18dB	

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

Kiruma



Warm Grey

3532 040
3536 040

NORDIC STABIL

Main Product Features

- Acoustic, walking and thermic comfort
- Easy and quick to install over an existing or uneven subfloor without levelling compound
- Available in 2m and 4m
- Low cost and easy maintenance with PU protection

Surface Treatment



Sustainability Tag




Logistics Information




Available in rolls: 2 & 4m
Rolls length: 351m (2m) & 251m (4m)

Laying direction:



Wood
GEA
Melbourne
Selene
Broken
Slate
Square

General Information



According to European Classification ISO 10874 (EN 685)

