



Hetero- geneous

VINYL LIGHT TRAFFIC

TX

- 50 TX Standing
- 56 TX Modulaire
- 60 TX Selection
- 64 TX Classic

NORDIC STABIL PLUS & NORDIC STABIL

- 70 Nordic Stabil Plus
- 72 Nordic Stabil

VINYL HEAVY TRAFFIC

COMPACT & ACOUSTIC

- 78 Tapiflex & Acczent Platinum
- 84 Tapiflex & Acczent Excellence
- 96 Tapiflex & Acczent Essential

COMPACT

- 104 Topaz 70
- 108 Ruby 70
- 112 Meteor 70
- 114 Meteor 55
- 116 Classic 40





Vinyl Light Traffic

TX

50 TX Standing

56 TX Modulaire

60 TX Selection

64 TX Classic

NORDIC STABIL PLUS & NORDIC STABIL

70 Nordic Stabil Plus

72 Nordic Stabil




HETEROGENEOUS OFFER

VINYL LIGHT TRAFFIC





The ideal solution
for housing
renovations in
timeless designs

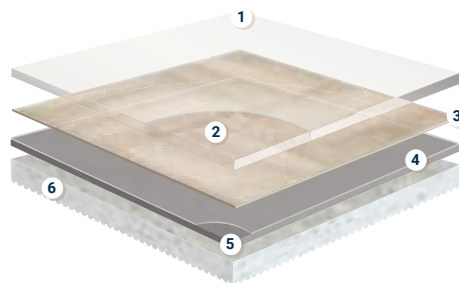

TX STANDING

- TopClean XP™ PUR reinforcement:** very high resistance to scratches and easy maintenance
- Pure PVC transparent wear layer:** resistance to abrasion
- High definition print:** for perfect designs
- Glass fibre non-woven reinforcement:** superior dimensional stability
- Solid homogeneous calendared sheet made of recycled vinyl:** resistance to indentation and tearing
- High density closed-cell foam backing:** sound reduction and comfort underfoot

SENSORIAL BENEFITS

- Wide range of 58 colours and 11 designs
- New embossing technology for a truly matt surface look

FUNCTIONAL BENEFITS

- Improved acoustic performance (up to 20dB)
- Low residual indentation

ENVIRONMENTAL BENEFITS

- Phthalate-free technology
- Part of the ReStart® programme

TECHNICAL OVERVIEW

	Standards	TX Standing
		2m
Classification		
Type of floor Covering	ISO 11638 (EN 651)	
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31
Characteristics		
Total thickness	ISO 24346 (EN 428)	3.25mm
Wear layer thickness	ISO 24340 (EN 429)	0.27mm
Total weight	ISO 23997 (EN 430)	2 920g/m²
PUR Reinforcement	–	TopClean XP™
Wear layer binder content	ISO 11638	Type I
Technical performance		
Residual indentation	Average measured value	Average at 0.12mm with the best value at 0.1mm
	ISO 24343-1 (EN 433)	≤ 20mm
Reaction to fire	EN 13501-1	B _f s1 glued over any A2 _f or A1 _f sustrate (concrete) & B _f s1 glued over any derivate wood substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostratic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ Ω
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	–	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 10140-3 (EN 717-2)	20dB
Acoustic improvement	NF S31-074	L _{n,e,w} < 65dB
Form of delivery	ISO 24341 (EN 426) ISO 24342 (EN 427)	Rolls: 25lm x 2m
CE Marking		
DoP number	-	0120-064-DoP-2014-11

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	Available in rolls: 2m Rolls length: 25lm	Wood Allover	





TX STANDING

Seaside Wood - Beige

- New and innovative designs, especially developed for social housing
- New embossing technology giving the product a very matt surface aspect
- 20dB sound absorption
- Best score in the market for residual indentation

Page 474
Coordinated accessories offer




Oak Tree - Dark

French Oak



Light Oak

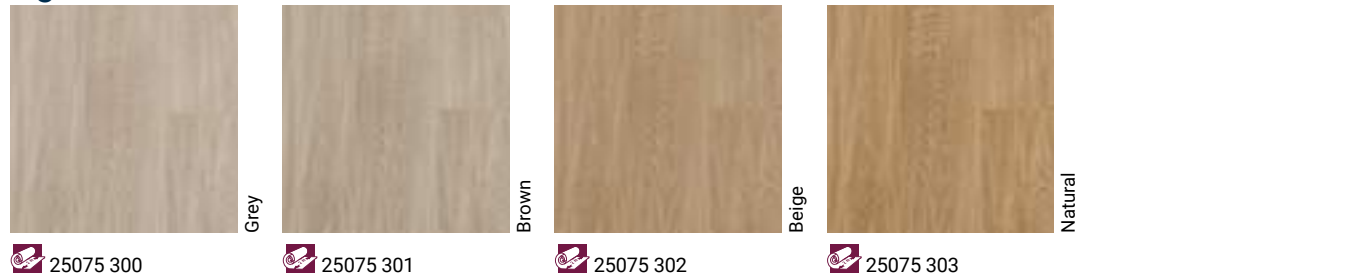

Legacy Oak




Seaside Wood




Minimal Wood



Oak Tree

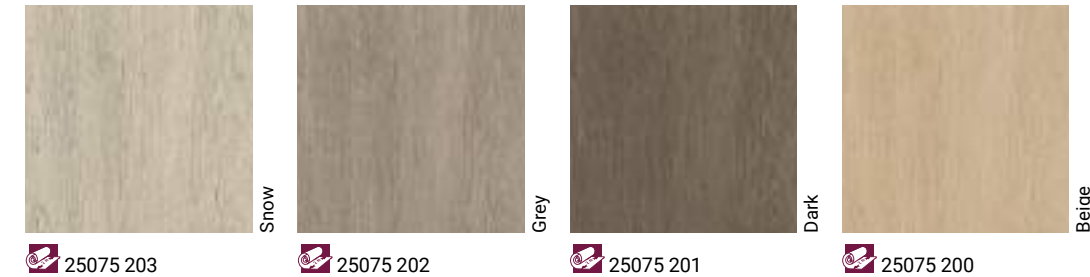

Tisse

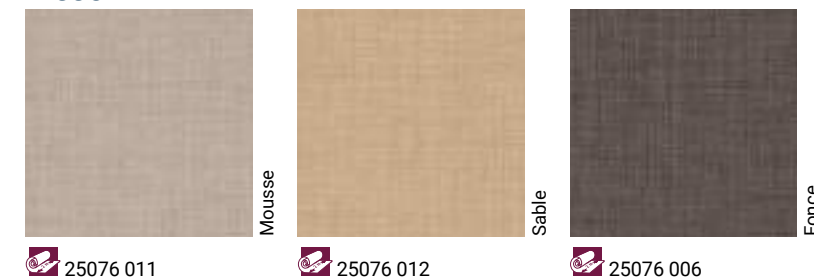

Logistics Information

Available in rolls: 2m
Rolls length: 251m

TX STANDING


Cement: Also available in TX Modulaire




Fiber Wood: Also available in TX Modulaire




Moon: Also available in TX Modulaire

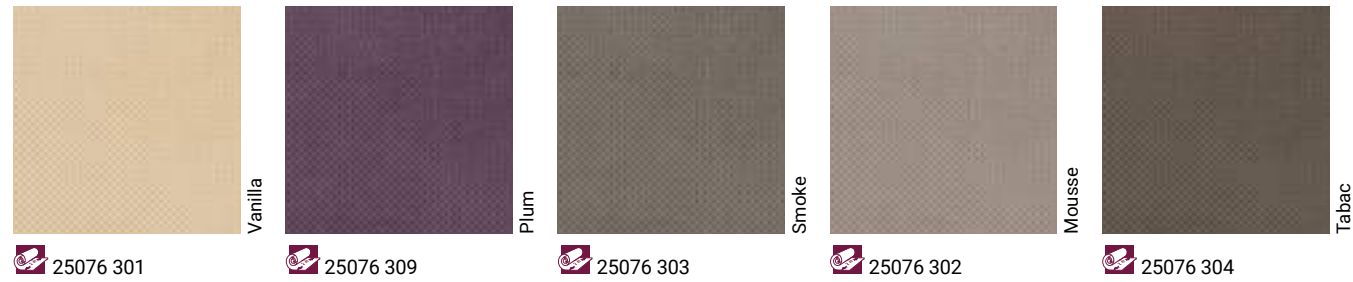

Textile

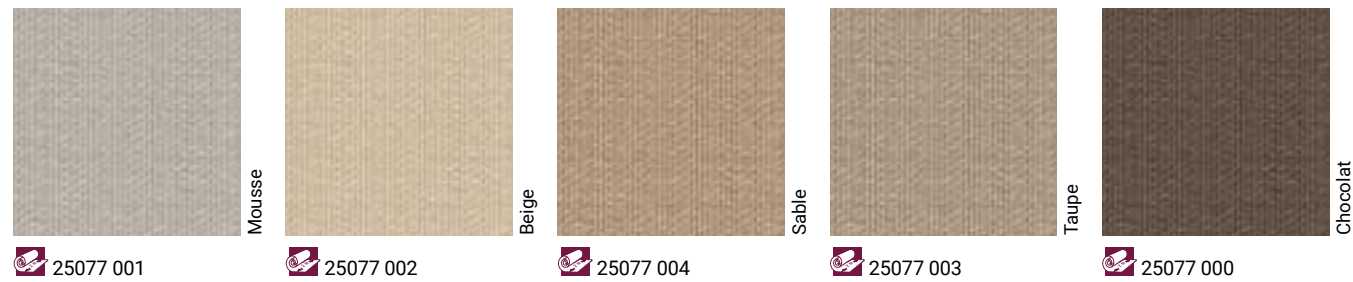

Moon

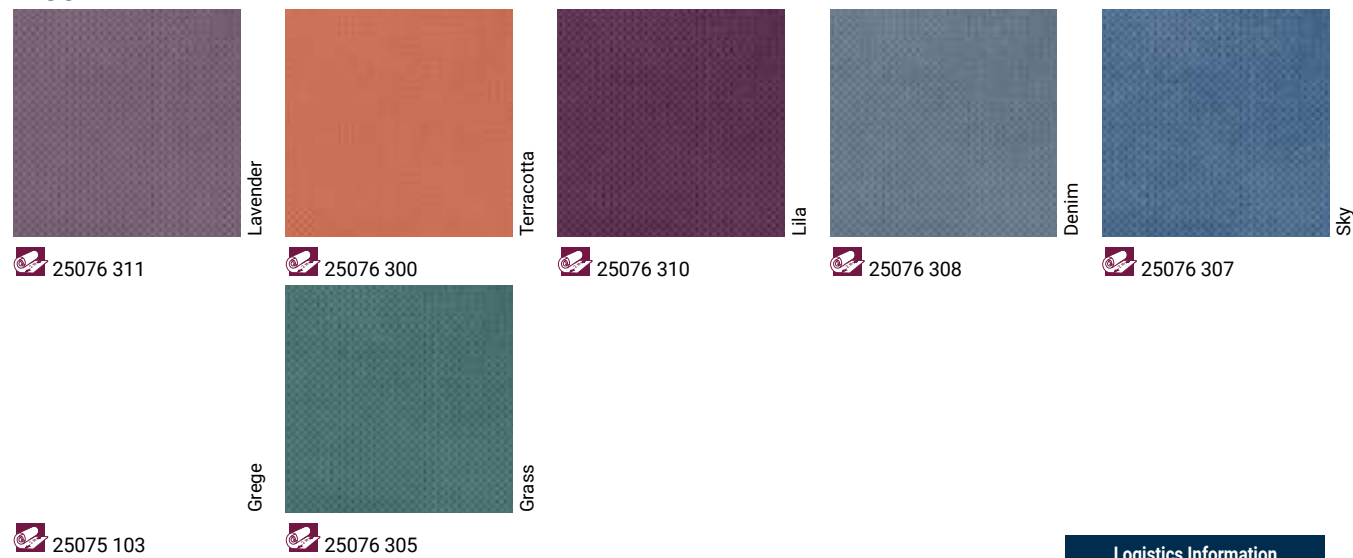

Logistics Information

Available in rolls: 2m
Rolls length: 251m




Page 474

Coordinated
accessories
offer



HETEROGENEOUS

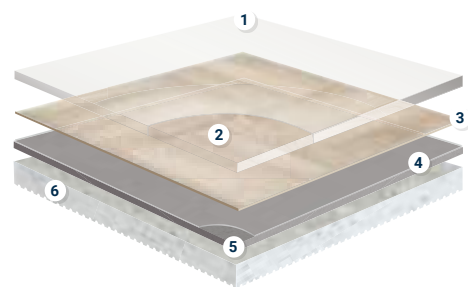

TX MODULAIRE

- TopClean XP™ PUR reinforcement:** very high resistance to scratches and easy maintenance
- Pure PVC transparent wear layer:** resistance to abrasion
- High definition print:** for perfect designs
- Glass fibre non-woven reinforcement:** superior dimensional stability
- Solid homogeneous calendered sheet made of recycled vinyl:** resistance to indentation and tearing
- High density closed-cell foam backing:** sound reduction and comfort underfoot

SENSORIAL BENEFITS

- Wide range of colours and designs reflecting the latest decor trends

FUNCTIONAL BENEFITS

- Range available in roll, plank and tile format for greater creativity
- Improved acoustic performance (up to 20db)

ENVIRONMENTAL BENEFITS

- TopClean XP™ protection means easier care with fewer chemicals and cleaning solvents
- Low VOC emissions contributes to better indoor air quality
- Phthalate-free technology
- Part of the ReStart® programme

TECHNICAL OVERVIEW

	Standards	TX Modulaire	
		Tile	Plank
Classification			
Type of floor Covering	ISO 11638 (EN 651)		
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31	
Characteristics			
Total thickness	ISO 24346 (EN 428)	3.05mm	
Wear layer thickness	ISO 24340 (EN 429)	0.27mm	
Total weight	ISO 23997 (EN 430)	2 575g/m²	
PUR Reinforcement	–	TopClean XP™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	0.12mm	
	Best measured value	0.10mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.25mm	
Reaction to fire	EN 13501-1	B _f s1 glued over any A2 _f or A1 _f substrate (concrete) & C _f s1 glued over any derivate wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30	
Dimensional stability	ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	ISO 23999 (EN 434)	< 2mm	
Electrostratic properties	EN 1815 EN 1081	≤ 2kV on concrete support R1 > 10 ⁹ Ω	
Chemical resistance	ISO 26987 (EN 423)	High resistance	
Hygiene	–	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.04m² K/W Suitable	
Light fastness	EN ISO 105-B02	> 6	
Impact sound reduction	EN ISO 717/2	ΔLw = 20dB	
Acoustic improvement	NF S31-074	L _{n,e,w} < 65dB	
Form of delivery	ISO 24341 (EN 426) ISO 24342 (EN 427)	33,33x33,33cm 50x50cm	25x100cm
CE Marking			
DoP number	-	0120-065-DoP-2014-11	

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	Available in planks 100 x 25cm Available in tiles 33,33 x 33,33cm 50 x 50cm	Esquisse, Minimal Wood, Oak Tree, Fiber Wood Weathered Oak, Oak, Sahara, Mineral, Ciment, Moon Cascade Comblanchien	





- Dedicated Modulaire offer in planks and tiles
- Combination of classic and innovative designs and colors
- 20dB sound absorption
- Best score in the market for residual indentation

TX MODULAIRE

Cement - Grey, Dark

Page 474

Coordinated accessories offer



Oak Tree - Snow


HETEROGENEOUS



Oak Bloc




Carpet

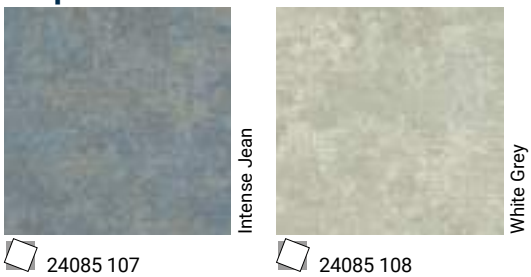

Minimal Wood: Also available in TX Standing




Tissage

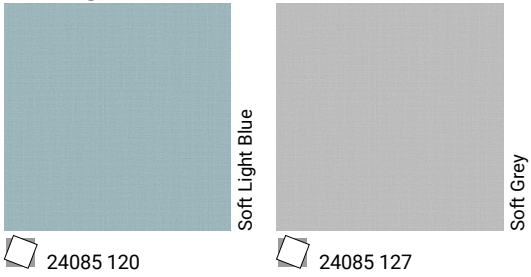


Fiber Wood: Also available in TX Standing



Cement: Also available in TX Standing

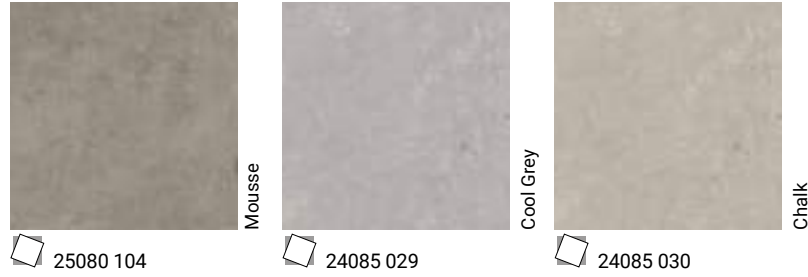

Twine

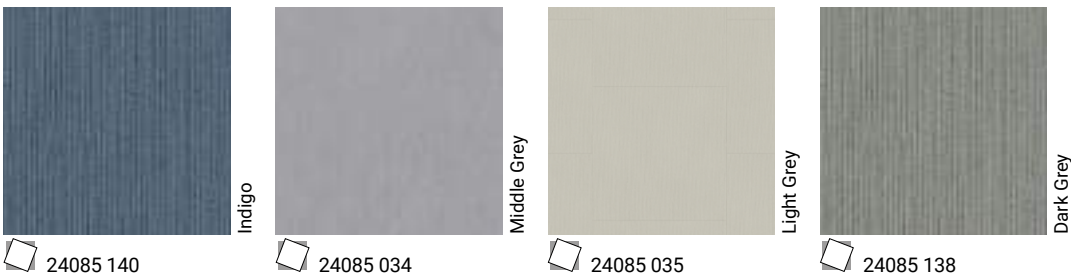

Citizen Oak



Terrazzo



Esquisse



Logistics Information

Available in planks




Available in tiles





The ideal solution
for housing
renovations
in timeless designs

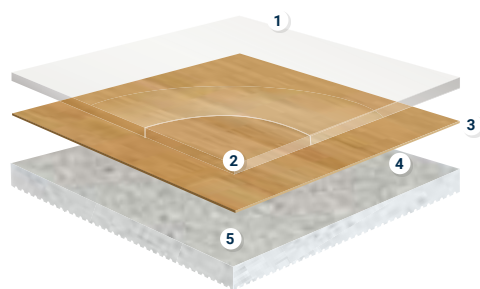

TX SELECTION

- 1 **TopClean™ PUR reinforcement:**
high resistance to scratches
and easy maintenance
- 2 **Pure PVC transparent wear layer:**
resistance to abrasion
- 3 **High definition print:**
for perfect designs
- 4 **Saturated glass fibre reinforcement:**
superior dimensional stability
- 5 **High density closed-cell foam backing:**
sound reduction and comfort underfoot

SENSORIAL BENEFITS

- Timeless designs and colours for an interior that's never out of style

FUNCTIONAL BENEFITS

- Range available in 2m and 4m formats for seamless installation in every room
- Improved acoustic performance of up to 20dB
- Low residual indentation

ENVIRONMENTAL BENEFITS

- PU protection means easier care with fewer chemicals and cleaning solvents
- Low VOC emissions contribute to better indoor air quality
- Phthalate-free technology
- Part of the ReStart® programme

TECHNICAL OVERVIEW

	Standards	TX Selection	
		2m	4m
Classification			
Type of floor Covering	EN ISO 11638	-	
Classification	EN ISO 10874 domestic commercial	Classes: 23 31	
Characteristics			
Total thickness	EN ISO 24346	3.30mm	
Wear layer thickness	EN ISO 24340	0.45mm	
Total weight	EN ISO 23997	2 400g/m²	
PUR Reinforcement	–	TopClean™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	0.14mm	
	Best measured value	0.12mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.35mm	
Reaction to fire	EN 13501-1	C _s s1 glued over any A2 _s or A1 _s substrate (concrete) and on any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.30	
Dimensional stability	EN ISO 23999	≤ 0.10%	
Furniture leg	EN 424	No damage	
Effect of castor chair	ISO 4918 - EN 425	No damage	
Curl resultant to heat	EN ISO 23999	≤ 8mm	
Electrostratic properties	EN 1815 EN 1081	≤ 2kV R1 > 10 ⁹ Ω	
Chemical resistance	EN ISO 26987	High resistance	
Thermal resistance Underfloor heating	EN ISO 10456	0.05m² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 717/2	ΔL _w = 20dB	
Acoustic improvement		L _{n,e,w} < 65dB	
Dimensions	ISO 24341 (EN 426) ISO 24342	Rolls: 25lm x 2m	Rolls: 25lm x 4m
Colors	-	Wood: 12 Kiruma: 6 Akira: 4	Wood: 12 Kiruma: 6 Akira: 4
CE Marking			
DoP number	-	0131-0057-DoP-2015-01-13	

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
 NO WAX NO POLISH FOR LIFE	 Available in rolls: 2m Rolls length: 25lm  Available in rolls: 4m Rolls length: 25lm	 Wood All over	 10 µg/m ³ Optimal Indoor Air Quality TVOC AT 28 DAYS  PHTHALATE FREE  100% Recyclable  ReStart Ready  MHS BY IPFA MATERIAL - HEALTH - STATEMENT  EPD®





- Classic colors and designs that match existing floors
- Available in 2m and 4m width to allow seamless installation in every room
- 20dB sound absorption
- Low residual indentation

Page 474

Coordinated
accessories
offer



HETEROGENEOUS

TX SELECTION

Hetre Fayard - Moyen

Kiruma

Blanc	Clair	Grege	Gris	Anthracite
24103 020 24102 020	24103 021 24102 021	24103 019 24102 019	24103 017 24102 017	24103 018 24102 018

Trend Oak



Snow Grey

24103 007
 24102 007



Snow Dore

24103 005
 24102 005



Snow White

24103 006
 24102 006

Hetre Fayard



Light

24103 002
 24102 002



Moyen

24103 001
 24102 001

Rustic Oak



Bianchi

24103 003
 24102 003



Naturel

24103 004
 24102 004

Arcadia



Grege

24103 009
 24102 009



Beige

24103 008
 24102 008



Sable

24103 010
 24102 010

Akira



Beige

24103 014
 24102 014




Mousse

24103 013
 24102 013



Gris

24103 012
 24102 012



Chocolat

24103 011
 24102 011

Cuba



Brosse

24103 015
 24102 015



Grey

24103 016
 24102 016


Logistics Information

Available in rolls: 2m
Rolls length: 25lm

Available in rolls: 4m
Rolls length: 25lm



The ideal solution
for housing
renovations
that offers great
value for money

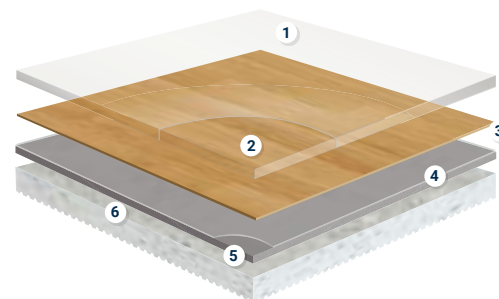

TX CLASSIC

- 1 TopClean™ PUR reinforcement:**
very high resistance to scratches
and easy maintenance
- 2 Pure PVC transparent wear layer:**
resistance to abrasion
- 3 High definition print:**
for perfect designs
- 4 Glass fibre non-woven reinforcement:**
superior dimensional stability
- 5 Solid homogeneous calandered sheet
made of recycled vinyl:**
resistance to indentation and tearing
- 6 High density closed-cell foam backing:**
sound reduction and comfort underfoot

SENSORIAL BENEFITS

- Timeless designs and colours for
an interior that's never out of style

FUNCTIONAL BENEFITS

- Range available in 2m and 4m formats
for seamless installation in every room

ENVIRONMENTAL BENEFITS

- PU protection means easier care with
fewer chemicals and cleaning solvents
- Low VOC emissions contributes
to better indoor air quality

TECHNICAL OVERVIEW

	Standards	TX Classic	
		2m	4m
Classification			
Type of floor Covering	EN ISO 11638	Heterogeneous Acoustic Vinyl	
Classification	EN ISO 10874 domestic commercial	Classes: 23 31	Classes: 23 31
Characteristics			
Total thickness	EN ISO 24346	2.60mm	
Wear layer thickness	EN ISO 24340	0.25mm	
Total weight	EN ISO 23997	1 800g/m ²	
PUR Reinforcement	–	TopClean™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	≤ 0.35mm	
	ISO 24343-1 (EN 433) requirement		
Reaction to fire	EN 13501-1	C _{fl} s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) C _{fl} s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30	
Dimensional stability	EN ISO 23999	≤ 0.10%	
Furniture leg	EN 424	No damage	
Effect of castor chair	EN ISO 4918	No damage	
Curl resultant to heat	ISO 23999 - EN 434	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms	
Chemical resistance	EN ISO 26987	High resistance	
Hygiene	–	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 10140-3 (EN 717-2)	ΔL _w = 19dB	
Acoustic improvement	NF S 31-074	L _{T,R,W} < 65dB Class A	
Dimensions	ISO 24341 (EN 426) EN ISO 24342	Rolls: 25lm x 2m	Rolls: 25lm x 4m
Colours	-	Castel: 6 Wood: 4	Castel: 6 Wood: 4
CE Marking			
DoP number	-	0004-0034DoP-2013-04	

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
 RO WAX NO POLISH EASY CARE	 Available in rolls: 2m Rolls length: 25lm  Available in rolls: 4m Rolls length: 25lm	 Wood  Castel	 Optimal Indoor Air Quality *TVOC AT 28 DAYS  PHthalate FREE  100% Recyclable  Restart Ready  MHS MATERIAL · HEALTH · STATEMENT  EPD



- Higher sound absorption (19dB)
- Good indentation and traffic resistance
- Available in 2 and 4m
- Low cost and easy maintenance with PU protection

TX CLASSIC


Gea

Castel



Chenonceau

3503 034
3505 034



Chambord

3503 013
3505 008



Chantilly

3503 014
3505 011



Blois


3503 001
3505 009

Gea



Middle Beige

3503 030
3505 030



Natural

3503 031
3505 031

French Oak



Medium Beige

3503 049
3505 049



White

3503 050
3505 050

Rock



Charcoal

3503 043
3505 043




Grey Black

3503 044
3505 044



Middle Grey

3503 045
3505 045



Medium Grege


3503 046
3505 046

Texture




Grege

3503 059
3505 059



Beige

3503 060
3505 060



Grey

3503 061
3505 061



Black

3503 062
3505 062

Logistics Information

Available in rolls: 2m
Rolls length: 25lm

Available in rolls: 4m
Rolls length: 25lm





Enhanced sound absorption and walking comfort over legacy flooring or uneven subfloors

SENSORIAL BENEFITS


- Improved sound absorption
- Superior walking comfort
- Insulation helps retain in-room warmth

FUNCTIONAL BENEFITS

- Easy installation over an existing floor or uneven subfloor
- Available in 2m and 4m widths


ENVIRONMENTAL BENEFITS

- PU protection reduces the need for chemicals or cleaning solvents in maintenance
- Low VOC emissions contributes to better indoor air quality

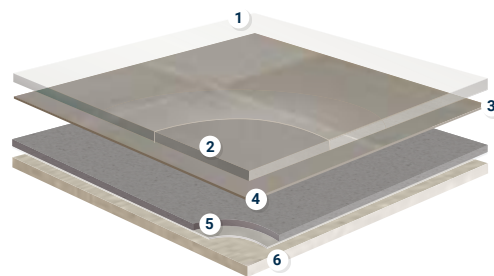

NORDIC STABIL PLUS

- 1 TopClean XP™ PUR reinforcement:** very high resistance to scratches and easy maintenance
- 2 Pure PVC transparent wear layer:** protects the design and improves durability
- 3 Design layer:** offers a large choice of colours and patterns
- 4 Compact layer:** resistance to indentation and tearing
- 5 Glass-fibre non-woven reinforcement:** superior dimensional stability
- 6 Textile backing:** ideal when installing on uneven sub floors. Optimises sound insulation and walking comfort

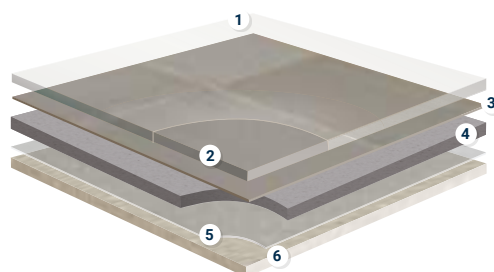

NORDIC STABIL

- 1 TopClean XP™ PUR reinforcement:** very high resistance to scratches and easy maintenance
- 2 Pure PVC transparent wear layer:** protects the design and improves durability
- 3 Design layer:** offers a large choice of colours and patterns
- 4 Foam layer:** adds warmth and comfort underfoot, and provides acoustic insulation
- 5 Glass-fibre non-woven reinforcement:** superior dimensional stability
- 6 Textile backing:** ideal when installing on uneven sub floors. Optimises sound insulation and walking comfort

TECHNICAL OVERVIEW

	Standards	Nordic Stabil Plus	Nordic Stabil
Classification			
Type of floor Covering	ISO 11638 (EN 651)	Heterogeneous Acoustic Vinyl	
Classification	ISO 10874 (EN 685) domestic commercial industrial	Classes: – 32 41	Classes: 23 31 –
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.50mm	2.80mm
Wear layer thickness	ISO 24340 (EN 429)	0.35mm	
Total weight	ISO 23997 (EN 430)	1 750g/m²	1 860g/m²
PUR Reinforcement	-	TopClean XP™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	0.20mm	0.25mm
	ISO 24343-1 (EN 433) requirement	≤ 0.35mm	≤ 0.35mm
Reaction to fire	EN 13501-1	C _{fi} s1 glued over any A2 _{fi} or A1 _{fi} substrate (concrete) C _{fi} s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%	< 0.10%
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ ohms	
Chemical resistance	ISO 26987 (EN 423)	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.05 m² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 717/2	ΔL _w = 18dB	
CE Marking			
Form of delivery	ISO 24341 (EN 426)	Rolls: 25lm x 2m Rolls: 25lm x 4m	Rolls: 25lm x 2m Rolls: 25lm x 4m
Colours		8	20
DoP number			
DoP number	-	0004-0021-DoP-2013-04	0004-0020-DoP-2013-04





TECHNICAL DATA

	Standards	Nordic Stabil Plus	
		2m	4m
Classification			
Type of floor Covering	ISO 11638 (EN 651)	Heterogeneous Acoustic Vinyl	
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 32 41	
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.50mm	
Wear layer thickness	ISO 24340 (EN 429)	0.35mm	
Total weight	ISO 23997 (EN 430)	1 750g/m²	
PUR Reinforcement	-	TopClean XP™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	0.20mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.35mm	
Reaction to fire	EN 13501-1	C _{fl} s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) C _{fl} s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Dimensional stability	ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm	
Electrostratic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10⁹ ohms	
Chemical resistance	ISO 26987 (EN 423)	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.05m² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 717/2	ΔL _w = 18dB	
CE Marking			
DoP number	-	0004-0021-DoP-2013-04	

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	Available in rolls: 2m Rolls length: 25lm Available in rolls: 4m Rolls length: 25lm	 Wood Costa Rica	

- Acoustic, walking and thermic comfort
- Easy and quick to install over an existing or uneven subfloor without levelling compound
- Available in 2m and 4m
- Low cost and easy maintenance with PU protection

NORDIC STABIL PLUS

Wood - Frenck Oak Natural

Costa Rica

White	Medium Brown	Beige	Medium Yellow	Grege
4505 009 4504 009	4505 010 4504 010	4505 011 4504 011	4505 012 4504 012	4505 014 4504 014

Wood

French Oak Light	French Oak Natural	French Oak Dark
4505 000 4504 000	4505 001 4504 001	4505 002 4504 002



NORDIC STABIL

Square - Black & White

- Acoustic, walking and thermic comfort
- Easy and quick to install over an existing or uneven subfloor without levelling compound
- Available in 2m and 4m
- Low cost and easy maintenance with PU protection

TECHNICAL DATA

	Standards	Nordic Stabil	
		2m	4m
Classification			
Type of floor Covering	ISO 11638 (EN 651)	Heterogeneous Acoustic Vinyl	
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31	
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.80mm	
Wear layer thickness	ISO 24340 (EN 429)	0.35mm	
Total weight	ISO 23997 (EN 430)	1 860g/m²	
PUR Reinforcement	-	TopClean XP™	
Wear layer binder content	ISO 11638	Type I	
Technical performance			
Residual indentation	Average measured value	0.25mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.35mm	
Reaction to fire	EN 13501-1	C _{fl} s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) C _{fl} s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Dimensional stability	ISO 23999 (EN 434)	< 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10⁹ ohms	
Chemical resistance	ISO 26987 (EN 423)	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.05m² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 717/2	ΔL _w = 18dB	
CE Marking			
DoP number	-	0004-0020-DoP-2013-04	

Wood



Wild Oak Light

3532 044
3536 044



Classic Oak Grey

3532 026
3536 026



French Oak Medium beige


3532 028
3536 028



French Oak Light Brown

3532 027
3536 027


Square



Black & White

3532 022
3536 022

Gea



Light Natural

3532 029
3536 059



Grey

3532 031
3536 031



Light Grey

3532 030
3536 030



Blanc

3532 036
3536 036



Light Grey

3532 037
3536 037

Melbourne

Selene



Light Grey

3532 034
3536 034



Grey

3532 035
3536 035



Medium Beige

3532 032
3536 032



Anthracite


3532 033
3536 033



Light Beige


3532 039
3536 039

Broken Slate




Warm Beige

3532 038
3536 038




Light

3532 043
3536 043




Grey

3532 042
3536 042



Dark Grey

3532 041
3536 041



Warm Grey

3532 040
3536 040

Kiruma

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	Available in rolls: 2m Rolls length: 251m Available in rolls: 4m Rolls length: 251m	Wood, GEa, Melbourne, Selene, Broken Slate, Square Kiruma	



Vinyl Heavy Traffic

COMPACT & ACOUSTIC

- 78 Tapiflex & Acczent Platinum
- 84 Tapiflex & Acczent Excellence
- 96 Tapiflex & Acczent Essential

COMPACT


- 104 Topaz 70
- 108 Ruby 70
- 112 Meteor 70
- 114 Meteor 55
- 116 Classic 40



HETEROGENEOUS OFFER

VINYL HEAVY TRAFFIC

Page 474
Coordinated
accessories
offer

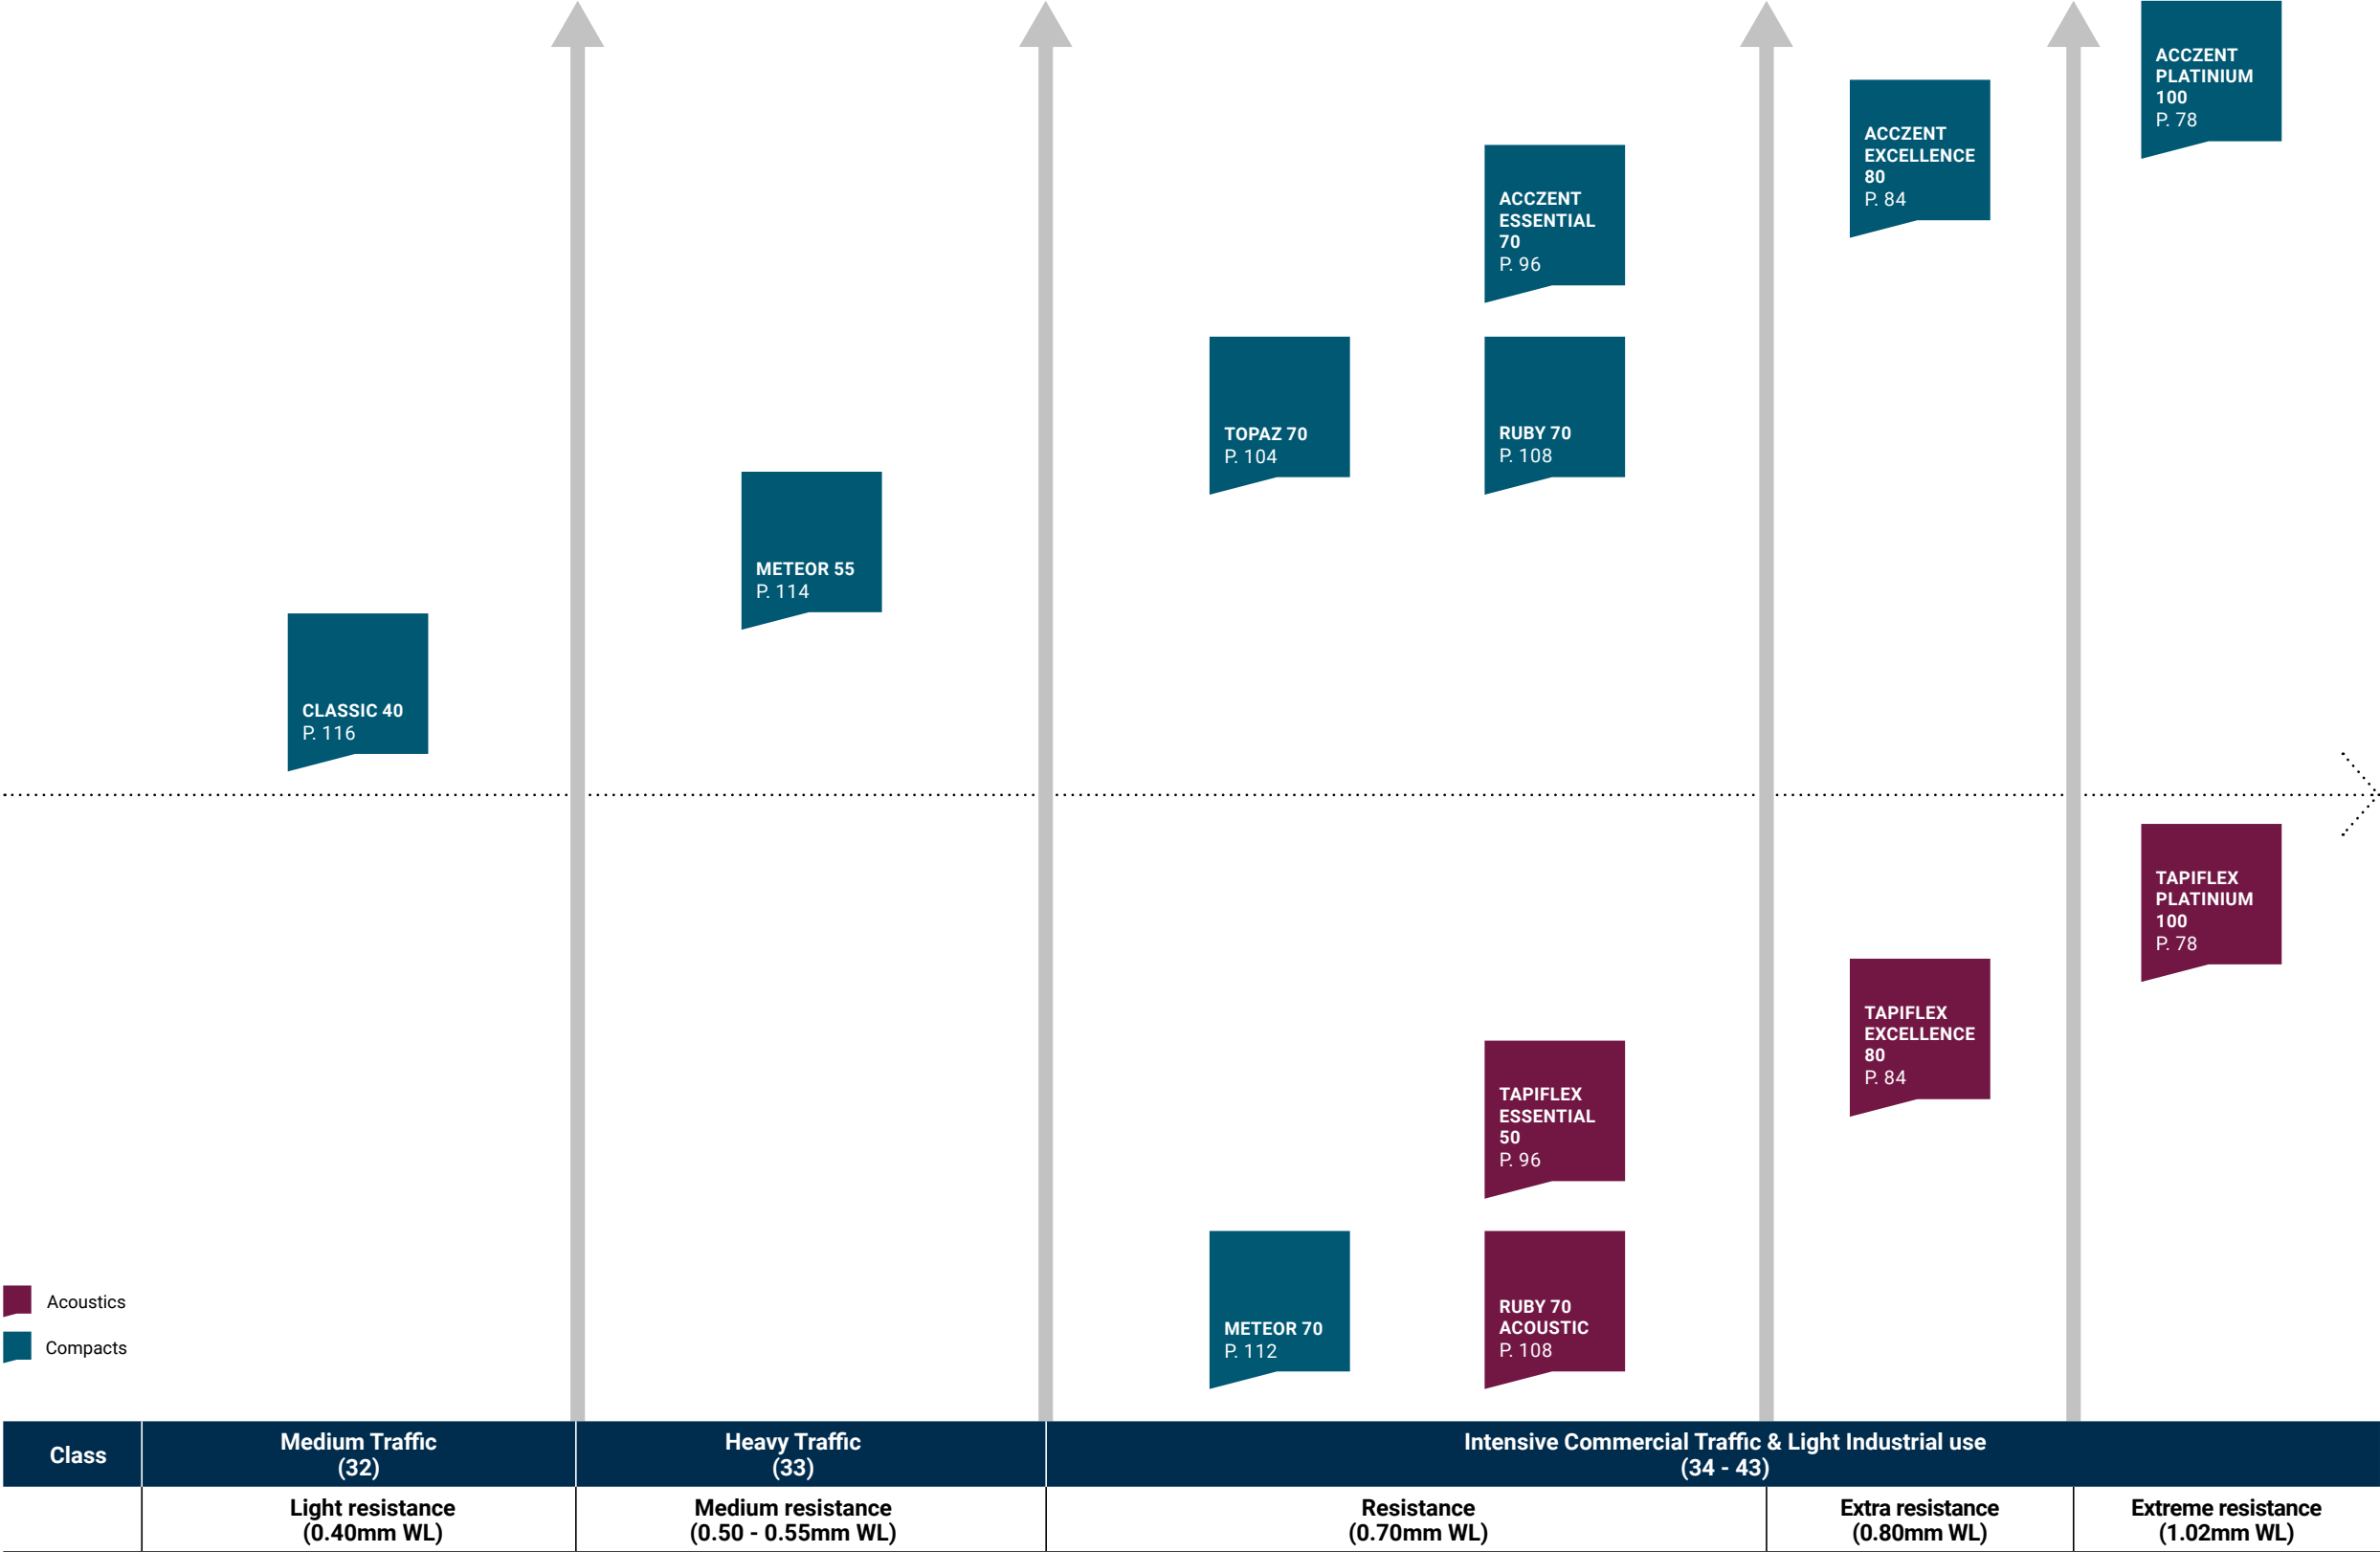



The technologically advanced solution for healthcare and educational environments with heavy traffic

SENSORIAL BENEFITS

- 140 + flooring references to mix and match
- Seamless finish with unique multicolour welding rods
- Full Floor, Wall & Stairs coordination
- Can be combined with ProtectWALL (cf p.365), Wetroom (cf p.332) and Tapiflex Stairs ranges plus a wide variety of accessories including multicolour welding rods


FUNCTIONAL BENEFITS

- New compact acoustic solution (9dB)
- Extreme resistance with inlaid product construction and 1.02 mm opaque wear layer
- Enhanced rollability properties
- Easy maintenance
- No wax, no polish for life with Top Clean XP™!

ENVIRONMENTAL BENEFITS


- 100% phthalate-free
- Very low VOC emissions
- ReStart ready

ACOUSTIC OPTION TAPIFLEX PLATINIUM

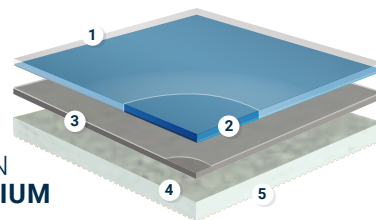

- 1 PUR treatment is a photo-reticulated coating that is highly resistant to abrasion and scratches
- 2 Opaque wear layer incorporates inlaid designs for higher perceived resistance
- 3 High density, non-woven glass fibre reinforcement for high dimensional stability and resistance to furniture
- 4 Solid homogeneous calendared sheet made of recycled vinyl for resistance to indentation and tearing
- 5 The Tapiflex version high density closed-cell foam backing for sound reduction, higher rollability and underfoot comfort

COMPACT OPTION ACCZENT PLATINIUM

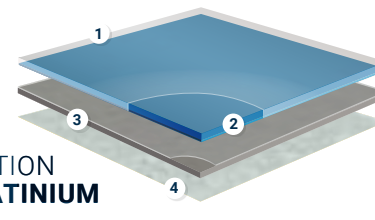

- 1 PUR treatment is a photo-reticulated coating that is highly resistant to abrasion and scratches
- 2 Opaque wear layer incorporates inlaid designs for higher perceived resistance
- 3 High density, non-woven glass fibre reinforcement for high dimensional stability and resistance to furniture
- 4 Solid homogeneous calendared sheet made of recycled vinyl for resistance to indentation and tearing

TECHNICAL DATA

	Standards	TAPIFLEX PLATINIUM 100	ACCZENT PLATINIUM 100
Classification			
Classification	EN 651	Heterogeneous Acoustic Vinyl	-
	EN ISO 10582	-	Heterogeneous Compact Vinyl
	EN ISO 10874	34	34-43
Wear Group	EN 651	T	-
Wear layer binder content	EN ISO 10582	-	Type I
Technical characteristics			
Total thickness	EN ISO 24346	3.10 mm	2.45 mm
Total weight	EN ISO 23997	3250 g/m²	3200 g/m²
Wear layer thickness	EN ISO 24340	1.02 mm	1.02 mm
Form of delivery	EN ISO 24341 (rolls)	approx. 23 running metres x 200 cm	approx. 23 running metres x 200 cm
Performances for CE marking requirements (EN 14041)			
Reaction to fire	EN 13501-1	B _{fl} -s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) C _{fl} -s1 glued over any derivate wood substrate	B _{fl} -s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) B _{fl} -s1 glued over any derivate wood substrate
Electrostatic properties	EN 1815	≤ 2.0 kV	≤ 2.0 kV
Thermal resistance	EN ISO 10456	0.02 m² K/W	0.02 m² K/W
Slip resistance	EN 13893	μ ≥ 0,3	μ ≥ 0,3
Technical performances			
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.20 mm Best measured value*: 0.07 mm Average measured value*: 0.09 mm	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm Average measured value*: 0.04 mm
Impact sound reduction	NF EN ISO 717 / 2	ΔL _w = 17 dB	ΔL _w = 9 dB
Acoustical improvement	NF S31-074	L _{n,e,w} < 65 dB - Class A	L _{n,e,w} < 85 dB - Class B
Slip resistance ⁽¹⁾	DIN 51130	R9	R9
Furniture leg	EN 424	No damage	No damage
Castor chair	ISO 4918	No damage	No damage
Curl resultant to heat	EN ISO 23999	≤ 8 mm	≤ 8 mm
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Dimensional stability	EN ISO 23999	< 0.10%	< 0.10%
Chemical resistance	EN ISO 26987	Not affected	Not affected
Underfloor heating	-	Suitable	Suitable
Colours			
	-	72	72
CE Marking			
DoP number	-	0170-0201-DoP-2017-11	0170-0200-DoP-2017-11

*For information -not binding. (1) Please note that slip resistance may be impacted by usage and cleaning operations. According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com.

	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
Tapiflex Platinum 100		Available in rolls Rolls length: 231m		
Accent Platinum 100				

TAPIFLEX & ACCZENT PLATINIUM

- Highly resistant product with 1.02mm opaque wear layer
- Inlaid designs with 3D effects
- Multicolour welding rods available for seamless finish

Page 474

Coordinated accessories offer

HETEROGENEOUS



Melt

Terracotta	Coral	Pink	Yellow	Mustard
Tapiflex: 25181 018 Acczent: 25177 018	Tapiflex: 25181 002 Acczent: 25177 002	Tapiflex: 25181 001 Acczent: 25177 001	Tapiflex: 25181 003 Acczent: 25177 003	Tapiflex: 25181 017 Acczent: 25177 017
Eggplant	Anis	Mastic	Beige	Lime
Tapiflex: 25181 007 Acczent: 25177 007	Tapiflex: 25181 016 Acczent: 25177 016	Tapiflex: 25181 019 Acczent: 25177 019	Tapiflex: 25181 020 Acczent: 25177 020	Tapiflex: 25181 004 Acczent: 25177 004
Petrol	Denim	Lagoon	Turquoise	Dark Blue
Tapiflex: 25181 012 Acczent: 25177 012	Tapiflex: 25181 011 Acczent: 25177 011	Tapiflex: 25181 013 Acczent: 25177 013	Tapiflex: 25181 005 Acczent: 25177 005	Tapiflex: 25181 006 Acczent: 25177 006
Chalk	Light Grey	Medium Grey	Black	
Tapiflex: 25181 000 Acczent: 25177 000	Tapiflex: 25181 009 Acczent: 25177 009	Tapiflex: 25181 010 Acczent: 25177 010	Tapiflex: 25181 008 Acczent: 25177 008	

Snow

Terracotta	Mustard	Anis	Denim	Petrol
Tapiflex: 25182 047 Acczent: 25178 047	Tapiflex: 25182 046 Acczent: 25178 046	Tapiflex: 25182 045 Acczent: 25178 045	Tapiflex: 25182 042 Acczent: 25178 042	Tapiflex: 25182 043 Acczent: 25182 043
Lagoon	Medium Grey	Light Grey	Chalk	Mastic
Tapiflex: 25182 044 Acczent: 25178 044	Tapiflex: 25182 041 Acczent: 25178 041	Tapiflex: 25182 040 Acczent: 25178 040	Tapiflex: 25182 055 Acczent: 25178 055	Tapiflex: 25182 048 Acczent: 25178 048

Spice & Candy

Yellow	Orangeade	Coral	Green	Blue
Tapiflex: 25181 067 Acczent: 25177 067	Tapiflex: 25181 066 Acczent: 25177 066	Tapiflex: 25181 064 Acczent: 25177 064	Tapiflex: 25181 065 Acczent: 25177 065	Tapiflex: 25181 063 Acczent: 25177 063
Grey	Dark Grey	Light Grey		
Tapiflex: 25181 026 Acczent: 25177 026	Tapiflex: 25182 056 Acczent: 25178 056	Tapiflex: 25182 049 Acczent: 25178 049		







Logistics Information

Available in rolls
Rolls length: 23lm
















TAPIFLEX & ACCZENT PLATINIUM







Uni

	Black		White		Dark Beige		Dark Grey		Warm Grey
	Tapiflex: 25181 939 Accent: 25177 939		Tapiflex: 25181 940 Accent: 25177 940		Tapiflex: 25181 918 Accent: 25177 918		Tapiflex: 25181 916 Accent: 25177 916		Tapiflex: 25181 025 Accent: 25177 025





Plazza




	Medium Grey		Coral		Pink		Eggplant		Lime
	Tapiflex: 25181 917 Accent: 25177 917		Tapiflex: 25182 025 Accent: 25178 025		Tapiflex: 25182 024 Accent: 25178 024		Tapiflex: 25182 030 Accent: 25178 030		Tapiflex: 25182 027 Accent: 25178 027
	Yellow		Beige		Turquoise		Dark Blue		Black
	Tapiflex: 25182 026 Accent: 25178 026		Tapiflex: 25182 023 Accent: 25178 023		Tapiflex: 25182 028 Accent: 25178 028		Tapiflex: 25182 029 Accent: 25178 029		Tapiflex: 25182 031 Accent: 25178 031

Salt & Pepper










	Light Grey		White		Grege		Medium Grey		Dark Grey
	Tapiflex: 25182 010 Accent: 25178 010		Tapiflex: 25182 007 Accent: 25178 007		Tapiflex: 25182 015 Accent: 25178 015		Tapiflex: 25182 009 Accent: 25178 009		Tapiflex: 25182 008 Accent: 25178 008
	Graphite								
	Tapiflex: 25182 014 Accent: 25178 014								

Rubber

	Coral		Pink		Lime		Beige
	Tapiflex: 25182 035 Accent: 25178 035		Tapiflex: 25182 034 Accent: 25178 034		Tapiflex: 25182 037 Accent: 25178 037		Tapiflex: 25182 033 Accent: 25178 033

	Turquoise		Yellow		Black
	Tapiflex: 25182 038 Accent: 25178 038		Tapiflex: 25182 036 Accent: 25178 036		Tapiflex: 25182 039 Accent: 25178 039

Sugar

	Yellow		Coral		Pink		Lime
	Tapiflex: 25182 053 Accent: 25178 053		Tapiflex: 25182 052 Accent: 25178 052		Tapiflex: 25182 051 Accent: 25178 051		Tapiflex: 25182 054 Accent: 25178 054
	Turquoise		Beige		Black		
	Tapiflex: 25182 057 Accent: 25178 057		Tapiflex: 25182 050 Accent: 25178 050		Tapiflex: 25182 058 Accent: 25178 058		



The ultimate design-oriented solution bringing stylish floors to high-traffic areas in education, aged- or healthcare and offices

SENSORIAL BENEFITS


- 250 + flooring options to mix and match
- 100% matte finish
- Full Floor, Wall & Stairs coordination
- Multicolour welding rods available for wood designs

FUNCTIONAL BENEFITS

- Traffic resistance with 0.80mm wear layer
- All colours available in compact and acoustic formats
- Acczent Unik offers a loose-lay option
- Excellent indentation to acoustic ratio
- No wax, no polish for life with TopClean XP™


ENVIRONMENTAL BENEFITS

- 100% phthalate-free
- Very low VOC emissions
- ReStart ready

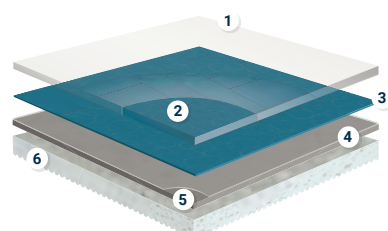


ACOUSTIC OPTION TAPIFLEX EXCELLENCE

- 1 PUR treatment, a photo-reticulated coating, is highly resistant to abrasion and scratches
- 2 Pure PVC transparent wear layer – 0.80 mm on all profiles – for the best resistance to traffic and wear
- 3 High quality printed designs for a vast selection of colours and patterns
- 4 High density glass fibre non-woven reinforcement for high dimensional stability and resistance to furniture
- 5 Solid homogeneous calendered sheet made of recycled vinyl for resistance to indentation and tearing
- 5 The Tapiroflex version has high-density closed-cell foam backing for sound reduction, higher rollability and underfoot comfort

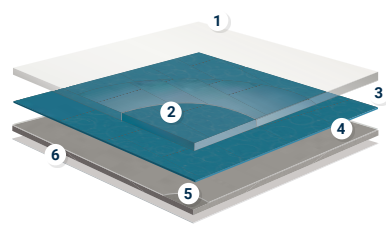

COMPACT LOOSE-LAY OPTION ACCZENT UNIK

- 1 PUR treatment, a photo-reticulated coating, is highly resistant to abrasion and scratches
- 2 Pure PVC transparent wear layer – 0.80 mm on all profiles – for the best resistance to traffic and wear
- 3 High quality printed designs for a vast selection of colours and patterns

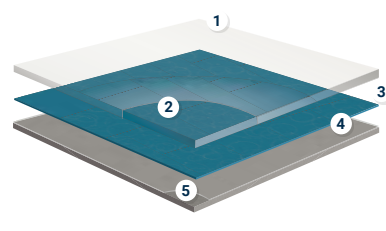

COMPACT OPTION ACCZENT EXCELLENCE

- 4 High density glass fibre non-woven reinforcement for high dimensional stability and resistance to furniture
- 5 Solid homogeneous calendered sheet made of recycled vinyl for resistance to indentation and tearing
- 6 Acczent unik has a specific backing for a loose-lay installation

TECHNICAL OVERVIEW

	Standards	TAPIFLEX EXCELLENCE 80 (SHEET)	TAPIFLEX TILES 65	ACCZENT EXCELLENCE 80 (SHEET)	ACCZENT UNIK (SHEET) Loose Lay Offer
Classification					
Classification	EN 651	Heterogeneous Acoustic Vinyl	Heterogeneous Acoustic Vinyl	-	-
	EN ISO 10582	-	-	Heterogeneous Compact Vinyl	Heterogeneous Compact Vinyl
	EN ISO 10874	34	34	34-43	34-43
Wear Group	EN 651	T	T	-	-
Wear layer binder content	EN ISO 10582	-	-	Type I	Type I
Technical characteristics					
Total thickness	EN ISO 24346	3.25 mm	3.45 mm	2.00 mm	2.10 mm
Total weight	EN ISO 23997	3250 g/m ²	3407 g/m ²	3100 g/m ²	3140 g/m ²
Wear layer thickness	EN ISO 24340	0.80 mm	0.65 mm	0.80 mm	0.80 mm
Performances for CE marking requirements (EN 14041)					
Reaction to fire	EN 13501-1	B _{fl} -s1 glued over any A ₂ _{fl} or A ₁ _{fl} substrate (concrete) C _{fl} -s1 glued over any derivate wood substrate	B _{fl} -s1 glued over any A ₂ _{fl} or A ₁ _{fl} substrate (concrete) C _{fl} -s1 glued over any derivate wood substrate	B _{fl} -s1 glued over any A ₂ _{fl} or A ₁ _{fl} substrate (concrete) B _{fl} -s1 glued over any derivate wood substrate	B _{fl} -s1 glued over any A ₂ _{fl} or A ₁ _{fl} substrate (concrete) B _{fl} -s1 glued over any derivate wood substrate
Electrostatic properties	EN 1815	≤ 2.0 kV	≤ 2.0 kV	≤ 2.0 kV	≤ 2.0 kV
Thermal resistance	EN ISO 10456	0.04 m ² K/W	0.04 m ² K/W	0.02 m ² K/W	0.02 m ² K/W
Slip resistance	EN 13893	≥ 0,3	≥ 0,3	≥ 0,3	≥ 0,3
Technical performances					
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.20 mm Best measured value*: 0.08 mm Average measured value*: 0.10 mm	Required value: ≤ 0.20 mm Best measured value*: 0.10 mm Average measured value*: 0.12 mm	Required value: ≤ 0.10 mm Best measured value*: 0.01 mm Average measured value*: 0.03 mm	Required value: ≤ 0.10 mm Best measured value*: 0.01 mm Average measured value*: 0.03 mm
Impact sound reduction	NF EN ISO 717 / 2	ΔL _w = 19 dB	ΔL _w = 19 dB	ΔL _w = 3 dB	ΔL _w = 4 dB
Acoustical improvement	NF S31-074	L _{n,ew} < 65 dB - Class A	L _{n,ew} < 65 dB - Class A	L _{n,ew} < 85 dB - Class C	L _{n,ew} < 85 dB - Class C
Slip resistance ⁽¹⁾	DIN 51130	R9/R10 Woods**	R9	R9/R10 Woods**	R9/R10 Woods**
Furniture leg	EN 424	No damage	No damage	No damage	No damage
Castor chair	ISO 4918	No damage	No damage	No damage	No damage
Curl resultant to heat	EN ISO 23999	≤ 8 mm	≤ 2 mm	≤ 8 mm	≤ 8 mm
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6	≥ 6
Dimensional stability	EN ISO 23999	< 0.10%	< 0.10%	< 0.10%	< 0.10%
Chemical resistance	EN ISO 26987	Not affected	Not affected	Not affected	Not affected
Underfloor heating	-	Suitable	Suitable	Suitable	Suitable
Colours					
	-	127	12	127	15
CE Marking					
DoP number	-	0120-0074-DoP-2017-12	0120-0060-DoP-2014-05	0120-0004-DoP-2013-04	0120-0044-DoP-2013-04

*For information -not binding. **Long Modern Oak, Oak Tree, Scandinavian Oak. (1) Please note that slip resistance may be impacted by usage and cleaning operations. (2) For AcczentUnik, please contact your sales representative. According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com.

	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
Tapiroflex Excellence 80				
Acczent Excellence 80		Available in rolls Rolls length: 23lm		
Tapiroflex Tiles 65		Available in tiles		
Acczent Unik				



TAPIFLEX & ACCZENT EXCELLENCE

- Unique long planks to enhance spaces
- Authentic feeling with new matte finish and realistic surface aspect
- Excellent resistance with TopClean XP™ surface treatment
- Multi-colour welding rods

Page 474

Coordinated accessories offer

HETEROGENEOUS



Allover Wood



White

Tapiflex: 25134 714
Acczent: 25129 714*
Unik: 25072 714



Black

Tapiflex: 25134 713
Acczent: 25129 713
Unik: 25072 713



Grege

Tapiflex: 25134 711
Acczent: 25129 711*



Beige

Tapiflex: 25134 200
Acczent: 25129 200



Grey

Tapiflex: 25134 202
Acczent: 25129 202

Oak Tree

Fiber Wood



Natural

Tapiflex: 25133 303**
Acczent: 25128 303*



Grege

Tapiflex: 25133 302**
Acczent: 25128 302*

Brushed Oak



Light

Tapiflex: 25132 027
Acczent: 25127 027*



Medium

Tapiflex: 25132 026
Acczent: 25127 026*


Beech Longstripe



Light


Tapiflex: 25132 102
Acczent: 25127 102*

Long Modern Oak



White

Tapiflex: 25134 005
Acczent: 25129 005



Grege


Tapiflex: 25134 008
Acczent: 25129 008



Natural

Tapiflex: 25134 010
Acczent: 25129 010

Modern Maple



Maple

Tapiflex: 25133 141
Acczent: 25128 141*

Scandinavian Oak



Light Beige

Tapiflex: 25134 402
Acczent: 25129 402



Medium Beige

Tapiflex: 25134 403
Acczent: 25129 403



Medium Grey

Tapiflex: 25134 401
Acczent: 25129 401



Dark Grey

Tapiflex: 25134 400
Acczent: 25129 400

Oak Longstripe



Light


Tapiflex: 25132 001
Acczent: 25127 001
Unik: 25186 001



Natural

Tapiflex: 25132 002
Acczent: 25127 002
Unik: 25186 002

Triangle Wood



Chalk


Tapiflex: 25133 136**
Acczent: 25128 136*



Natural

Tapiflex: 25133 137**
Acczent: 25128 137*

Washed Oak



White

Tapiflex: 25132 817
Acczent: 25127 817
Unik: 25186 817



Natural

Tapiflex: 25132 818
Acczent: 25127 818*

Logistics Information

Available in rolls
Rolls length: 231m


Available in tiles




TAPIFLEX & ACCZENT EXCELLENCE

TAPIFLEX & ACCZENT EXCELLENCE


Concrete

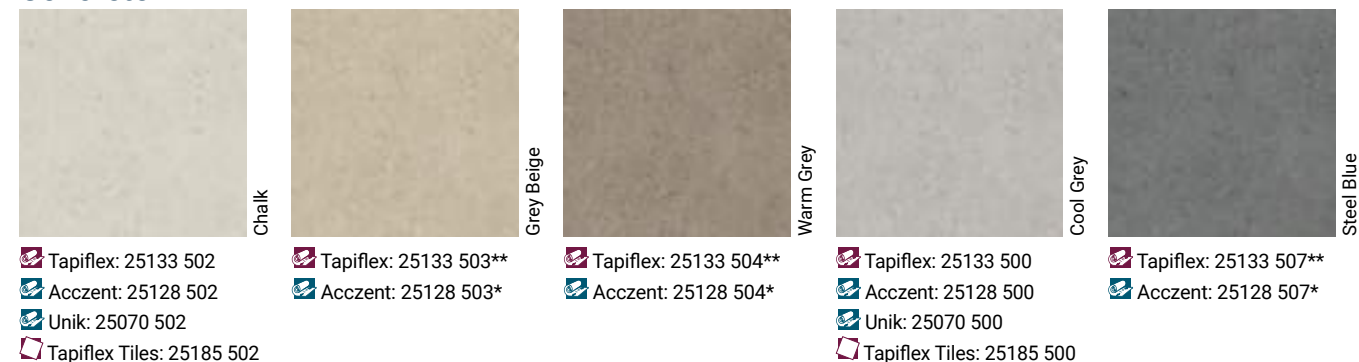


Carpet

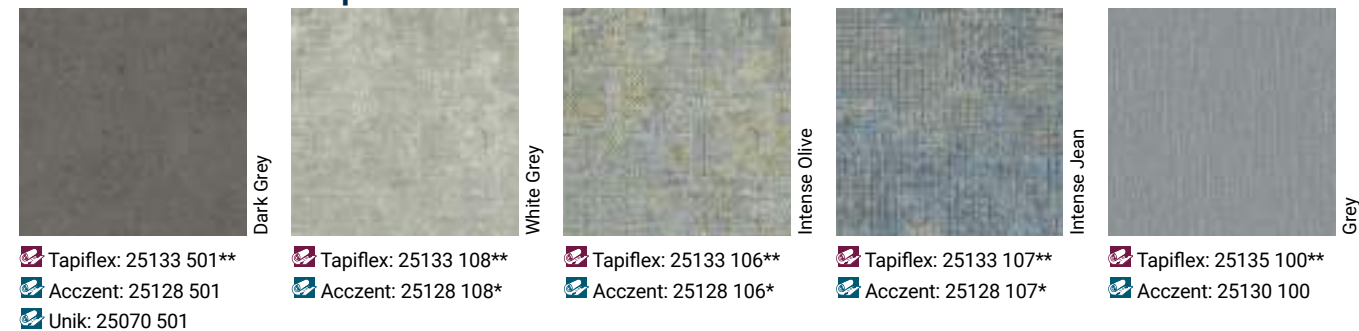


Digital Wave

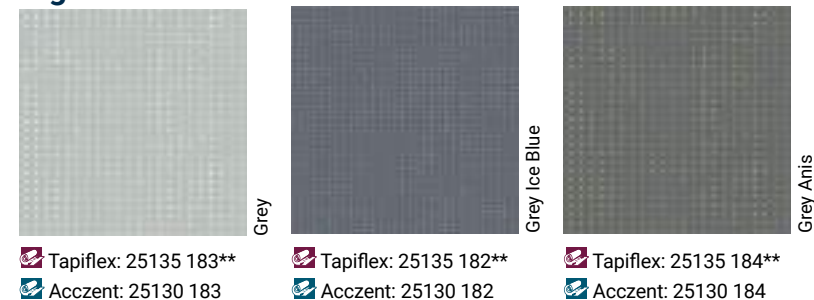


Bubbles

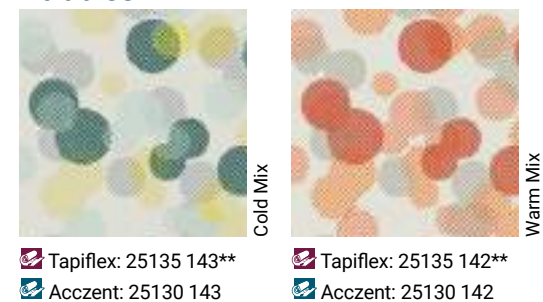

Cubic

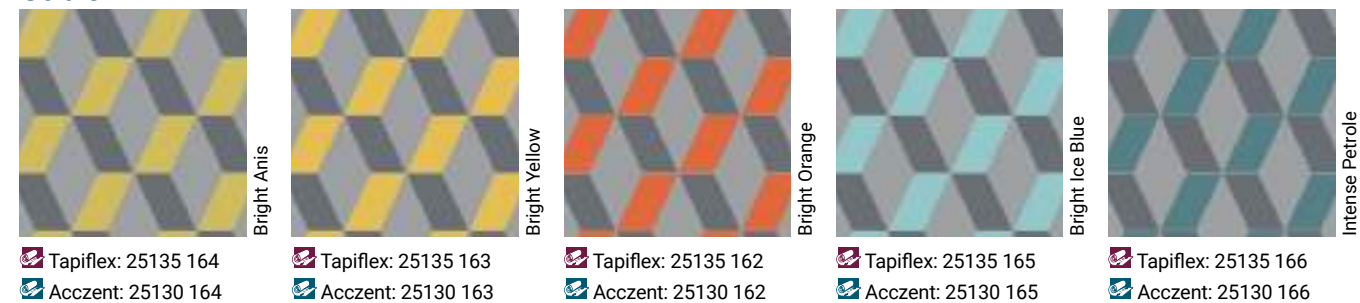

Diamond

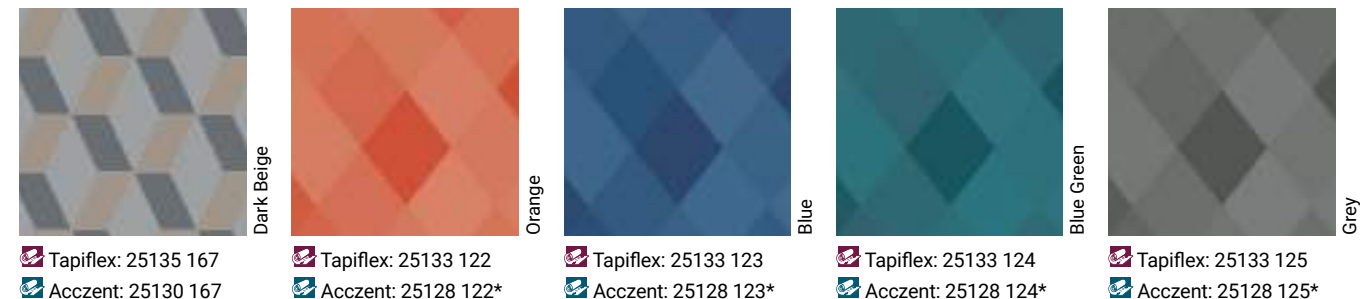

Esquisse



Logistics Information

Available in rolls
Rolls length: 231m

Available in tiles

* Acczent Unik: Possible on demand
** Tapiflex Tiles: Possible on demand



TAPIFLEX & ACCZENT EXCELLENCE




TAPIFLEX & ACCZENT EXCELLENCE

Facet



Prune

Tapiflex: 25133 121**
Acczent: 25128 121*



Orange

Tapiflex: 25133 112
Acczent: 25128 112*
Tapiflex Tiles: 25185 112



Yellow

Tapiflex: 25133 113**
Acczent: 25128 113*



Blue

Tapiflex: 25133 120**
Acczent: 25128 120*



Water

Tapiflex: 25133 115
Acczent: 25128 115*
Tapiflex Tiles: 25185 115

Granito



Light Beige

Tapiflex: 25133 109**
Acczent: 25128 109*



Warm Grey

Tapiflex: 25133 110**
Acczent: 25128 110*



Cool Grey

Tapiflex: 25133 111**
Acczent: 25128 111*



Anis

Tapiflex: 25135 179
Acczent: 25130 179



Dark Grey

Tapiflex: 25135 181
Acczent: 25130 181

Origami Numbers



Light Grey

Tapiflex: 25135 180
Acczent: 25130 180



Bright Violet

Tapiflex: 25135 177**
Acczent: 25130 177



Bright Orange

Tapiflex: 25135 178**
Acczent: 25130 178



Bright Turquoise

Tapiflex: 25135 176**
Acczent: 25130 176



Intense Petrol

Tapiflex: 25135 174**
Acczent: 25130 174

Fusion Lines



Beige

Tapiflex: 25135 173**
Acczent: 25130 173




Intense Olive

Tapiflex: 25135 175**
Acczent: 25130 175



Phospho

Tapiflex: 25135 171**
Acczent: 25130 171



Dark Grey


Tapiflex: 25135 172**
Acczent: 25130 172

Logistics Information

Available in rolls
Rolls length: 23lm

Available in tiles

Encryption



Black & White

Tapiflex: 25133 189**
Acczent: 25128 189*

Flocons²



Red

Tapiflex: 25133 169
Acczent: 25128 169



Rainbow

Tapiflex: 25133 170
Acczent: 25128 170



TAPIFLEX & ACCZENT EXCELLENCE



TAPIFLEX & ACCZENT EXCELLENCE


Matrix²

	Bright Orange		Bright Yellow		Bright Anis		Dark Grey		Phospho
 Tapiflex: 25136 188**		 Tapiflex: 25136 187**		 Tapiflex: 25136 186**		 Tapiflex: 25136 019**		 Tapiflex: 25136 101**	
 Acczent: 25131 188		 Acczent: 25131 187		 Acczent: 25131 186		 Acczent: 25131 019		 Acczent: 25131 101	

Twine

	Bright Turquoise		Graphite		Turquoise		Indigo		Dark Grey
 Tapiflex: 25136 185**		 Tapiflex: 25136 000**		 Tapiflex: 25133 139		 Tapiflex: 25133 140**		 Tapiflex: 25133 138**	
 Acczent: 25131 185		 Acczent: 25131 000		 Acczent: 25128 139*		 Acczent: 25128 140*		 Acczent: 25128 138*	
				 Tapiflex Tiles: 25185 139					

Steel




 Tapiflex: 25133 601
 Acczent: 25128 601
 Unik: 25070 601
 Tapiflex Tiles: 25185 601

Tapped Metal






 Tapiflex: 25133 126**
 Acczent: 25128 126*

Tissage

	Soft Pink		Soft Orange		Soft Yellow		Soft Light Blue		Soft Water
 Tapiflex: 25133 135**		 Tapiflex: 25133 132**		 Tapiflex: 25133 133**		 Tapiflex: 25133 130**		 Tapiflex: 25133 134**	
 Acczent: 25128 135*		 Acczent: 25128 132		 Acczent: 25128 133		 Acczent: 25128 130		 Acczent: 25128 134	
		 Unik: 25070 132		 Unik: 25070 133		 Unik: 25070 130		 Unik: 25070 134	

	Soft Light Green		Soft Grey		Soft Grege		Soft Beige
 Tapiflex: 25133 131**		 Tapiflex: 25133 127**		 Tapiflex: 25133 128**		 Tapiflex: 25133 129**	
 Acczent: 25128 131		 Acczent: 25128 127*		 Acczent: 25128 128		 Acczent: 25128 129*	
 Unik: 25070 131		 Unik: 25070 128					

Terrazzo

	Terracotta		Green		Blue
 Tapiflex: 25133 104		 Tapiflex: 25133 103**		 Tapiflex: 25133 105	
 Acczent: 25128 104*		 Acczent: 25128 103*		 Acczent: 25128 105*	
 Tapiflex Tiles: 25185 104				 Tapiflex Tiles: 25185 105	

* Acczent Unik: Possible on demand
** Tapiflex Tiles: Possible on demand






Logistics Information

 Available in rolls
Rolls length: 231m

 Available in tiles

TAPIFLEX & ACCZENT EXCELLENCE

Uni

 Intense Plum Tapiflex: 25136 937 Acczent: 25131 937	 Bright Pink Tapiflex: 25136 927 Acczent: 25131 927	 Bright Red Tapiflex: 25136 928 Acczent: 25131 928	 Bright Orange Tapiflex: 25136 929 Acczent: 25131 929	 Intense Terracotta Tapiflex: 25136 942 Acczent: 25131 942
 Bright Yellow Tapiflex: 25136 930 Acczent: 25131 930	 Bright Anis Tapiflex: 25136 931 Acczent: 25131 931	 Intense Olive Tapiflex: 25136 938 Acczent: 25131 938	 Dark Beige Tapiflex: 25136 918 Acczent: 25131 918	 Intense Kaki Tapiflex: 25136 934 Acczent: 25131 934
 Intense Water Tapiflex: 25136 936 Acczent: 25131 936	 Intense Petrole Tapiflex: 25136 935 Acczent: 25131 935	 Bright Ice Blue Tapiflex: 25136 932 Acczent: 25131 932	 Bright Turquoise Tapiflex: 25136 926 Acczent: 25131 926	 Bright Dark Turquoise Tapiflex: 25136 933 Acczent: 25131 933
 Intense Jean Tapiflex: 25136 943 Acczent: 25131 943	 Bright Extreme Blue Tapiflex: 25136 941 Acczent: 25131 941	 White Tapiflex: 25136 940 Acczent: 25131 940	 Medium Grey Tapiflex: 25136 917 Acczent: 25131 917	 Warm Grey Tapiflex: 25136 925 Acczent: 25131 925
 Dark Grey Tapiflex: 25136 916 Acczent: 25131 916	 Black Tapiflex: 25136 939 Acczent: 25131 939			

Logistics Information

Available in rolls
Rolls length: 23lm

Available in tiles

Page 474

Coordinated
accessories
offer

HETEROGENEOUS





Class-leading comfort that creates calmer, more agreeable environments

SENSORIAL BENEFITS


- Broad palette of calming shades
- Colour-coordinated designs promote a harmonious feel
- Available in sheets and tiles
- Matte finish
- Available also in a new format : 100 x 25 cm

ENVIRONMENTAL BENEFITS

- Very low VOC emissions contribute to better indoor air quality
- Sustainably designed to save resources in the long term
- 100% phthalate-free

FUNCTIONAL BENEFITS

- Best-in-class acoustic performance maximises user comfort
- Durable structure with improved resistance to static indentation
- No wax, no polish for life with Top Clean XP™ !
- Available in NEW compact version : Acczent Essential.

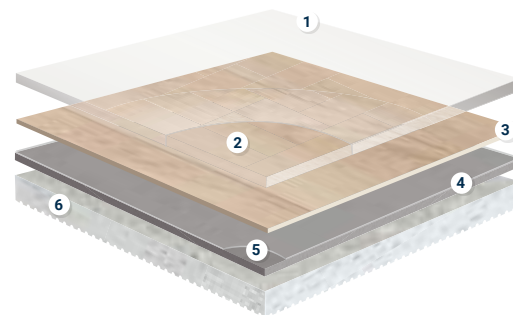

ACCZENT & TAPIFLEX ESSENTIAL

- TopClean XP™ PUR reinforcement:**
very high resistance to scratches and easy maintenance
- Pure PVC transparent wear layer:**
resistance to abrasion
- High definition print:**
for perfect designs
- Glass fibre non-woven reinforcement:**
superior dimensional stability
- Solid homogeneous calendered sheet made of recycled vinyl:**
resistance to indentation and tearing
- High density closed-cell foam backing (Tapiflex only):**
sound reduction and comfort underfoot

TECHNICAL OVERVIEW

	Standards	Tapiflex Essential 50	Tapiflex Tiles 50	Tapiflex Planks 50	NEW Acczent Essential 70
Classification					
Type of Floor Covering	EN 651	Heterogeneous Acoustic floor covering based on polyvinyl chloride			-
	EN ISO 10582	-			Heterogeneous Compact floor covering based on polyvinyl chloride
Classification	ISO 10874	Classes: 33 42			Classes: 34 43
Wear group	EN 651	T			-
Wear layer binder content	EN ISO 10582	-			Type I
Characteristics					
Total thickness	ISO 24346	3.30mm			2.00mm
Wear layer thickness	ISO 24340	0.50mm			0.70mm
Total weight	ISO 23997	2 770g/m²	3 212g/m²		3 069 g/m²
Binder content	ISO 10582	-			
Technical performance					
Impact sound reduction	NF EN ISO 717 / 2	ΔLw = 20 dB	ΔLw = 19 dB		ΔLw = 3 dB
Acoustic improvement	NF S31-074	L _{n,e,w} < 65dB Class A			L _{n,e,w} < 85 dB - Class C
Residual indentation	Average measured value(*)	0.12mm			0.03mm
	ISO 24343-1 (EN 433) requirement	≤ 0.20mm			≤ 0.10mm
	Best measured value(*)	0.10mm			0.02mm
Reaction to fire	EN 13501-1	B _f -s1 glued over any A2 _f or A1 _f substrate (concrete) C _f -s1 glued over any derivate wood substrate			B _f -s1 glued over any A2 _f or A1 _f substrate (concrete) B _f -s1 glued over any derivate wood substrate
Slip resistance	DIN 51130	R9/R10 (Citizen Oak)	R9	R10 (Citizen Oak)	R9/R10 (Citizen Oak)
Dimensional stability	ISO 23999	≤ 0.10%			
Furniture leg	EN 424	No damage			
Castor chair	ISO 4918	No damage			
Curl resultant to heat	ISO 23999	≤ 8mm	≤ 2mm		≤ 8mm
Electrostratic properties	EN 1815	≤ 2 kV			
Chemical resistance	ISO 26987	Not affected			
Thermal resistance Underfloor heating	EN ISO 10456	0.04m² K/W Suitable (maximum 27°C)			0.02 m² K/W Suitable (maximum 27°C)
Light fastness	EN ISO 105-B02	≥ 6			
Slip resistance	EN 13893	≥ 0.3			
Form of delivery	EN 24341	Approx. 23 running metres x 200 cm			Approx. 23 running metres x 200 cm
	ISO 24342		50 x 50 cm - 20 tiles/box = 5 sqm	100 x 25 cm - 20 planks/box = 5 sqm	
Colours		42	8	3	10
CE Marking					
DoP number	-	0120-0057-DoP-2014-05	0120-0061-DoP-2014-05		0120-079-DoP-2019-02

(*) for information – not binding

	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials	
Tapiflex	 	 Available in rolls Rolls length: 231m	 Wood All over	  	 
Acczent		 Available in tiles	 Tiles		
		 Available in planks 100 x 25cm			





- Comfortable acoustic flooring
- Easy maintenance with Top Clean XP™ PUR reinforcement
- Good resistance to scuff, soiling & staining

TAPIFLEX ESSENTIAL

Chambray Denim - Dark Denim

Page 474

Coordinated accessories offer



Tisse - Grey Beige

HETEROGENEOUS






Citizen Oak



				
Beige	Brown	Light Grey	Dark Grey	Natural
 25188 228  25067 033	 25188 229	 25188 230	 25188 231  25067 192	 25188 232  25067 088

French Oak

		
Dark Grey	Medium Grey	White
 25190 000	 25190 001	 25190 100

Chambray

				
Anis	Aqua	Corail	Dark Denim	Dark Grey
 25094 217	 25094 218	 25094 219	 25094 220	 25094 221

				
Green	Grey Beige	Denim	Light Grey	Orange
 25094 222	 25094 223	 25094 224	 25094 225	 25094 226

Tisse

			
Dark Aqua	Grey Beige	Medium Grey	Dark Grey
 25094 227	 25094 005	 25094 002	 25094 301

Logistics Information

 Available in rolls
Rolls length: 231m

 Available in tiles

 Available in planks
100 x 25cm


TAPIFLEX ESSENTIAL

Stamp




Dark Blue

25094 200
25184 200



Dark Grey

25094 201




Green

25094 202
25184 202



Kaki

25094 203




Light Grey

25094 204



Mastic

25094 205



Olive

25094 206



Orange

25094 207




Petrol

25094 208




Mint

25094 209



Red

25094 210



Light Turquoise

25094 211
25184 211



Yellow


25094 212



Purple


25094 213

Cement



Dark Grey

25094 214
25184 214



Medium grey


25094 216
25184 216



Light Grey

25094 215

Soft stone



Beige

25094 234
25184 234



Cold Grey

25094 235
25184 235



Warm Grey

25094 236
25184 236

Logistics Information

Available in rolls
Rolls length: 231m

Available in tiles

Available in planks
100 x 25cm





SENSORIAL BENEFITS


- Mix of mineral and wood effects
- Large choice of printed and inlaid designs

ENVIRONMENTAL BENEFITS

- Low VOC emissions contribute to better indoor air quality

FUNCTIONAL BENEFITS

- 4 different formats to meet most needs
- Resists indentation and abrasion
- Cost-effective, easy maintenance with TopClean™

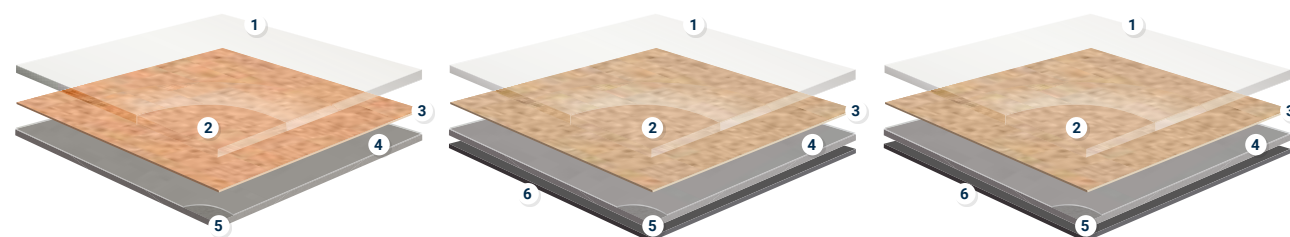

RUBY & METEOR

- 1 Easy maintenance and very high resistance to scratches: TopClean™ PUR reinforcement treatment
- 2 Resistance to abrasion: 0.70 or 0.55mm pure PVC transparent wear layer
- 3 High-definition print
- 4 Superior dimensional stability (≤ 0.10%): glass fibre non-woven reinforcement
- 5 Resistance to indentation and tearing: solid homogeneous calendared sheet made of recycled vinyl
- 6 PVC Backing

TOPAZ 70

CLASSIC 40

- 1 Easy maintenance and very high resistance to scratches: TopClean™ PUR reinforcement treatment
- 2 Resistance to abrasion: 0.40mm pure PVC transparent wear layer
- 3 High definition print
- 4 Superior dimensional stability (≤ 0.40%): glass fibre non-woven reinforcement
- 5 Resistance to indentation and tearing: solid homogeneous calendared sheet made of recycled vinyl
- 6 PVC Backing

TECHNICAL OVERVIEW

	Standards	TOPAZ 70	RUBY 70	RUBY 70 Acoustic	METEOR 70	METEOR 55	CLASSIC 40
Classification							
Type of floor covering	ISO 10582	Heterogeneous compact floor covering based on polyvinyl chloride		Polyvinyl chloride floor covering with foam layer	Heterogeneous compact floor covering based on polyvinyl chloride		
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43	Classes: 34 43	Classes: 34 42	Classes: 34 43		Class: 32
Characteristics							
Total thickness	ISO 24346	2.50mm	2.00mm	3.00mm	2.00mm	2.00mm	2.00mm
Wear layer thickness	ISO 24340	0.70mm	0.70mm	0.70mm	0.70mm	0.55mm	0.40mm
Total weight	ISO 23997	2 900g/m²	3 000g/m²	2 500g/m²	2650g/m²	2 300g/m²	2 150g/m²
PU treatment	EN ISO 23997	TopClean™	TopClean™	TopClean™	TopClean™	TopClean™	TopClean™
Wear layer binder content	ISO 10582	Type I					
Technical performance							
Residual indentation	Best measured value		0.02mm	0.11mm	0.04mm	0.05mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.10mm	≤ 0.20mm	≤ 0.10mm	≤ 0.10mm	≤ 0.10mm
Reaction to fire	EN 13501-1	C _{fl} - s1	B _{fl} -s1	C _{fl} - s1	B _{fl} -s1		C _{fl} - s1
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30	R10 μ ≥ 0.30	R9 μ ≥ 0.30	R10 μ ≥ 0.30	R10 μ ≥ 0.30	R10 μ ≥ 0.30
Dimensional stability	ISO 23999	≤ 0.10%					≤ 0.40%
Furniture leg	EN 424	No damage					
Castor chair	ISO 4918	No damage					
Curl resultant to heat	ISO 23999	≤ 8mm					
Electrostatic properties	EN 1815	≤ 2kV on concrete					
Chemical resistance	EN ISO 26987	Not affected (0)					
Thermal resistance Underfloor heating	EN ISO 10456	0.02m² K/W Suitable	0.02m² K/W Suitable	0.04m² K/W Suitable	0.02m² K/W Suitable	0.02m² K/W Suitable	0.02m² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6					
Impact sound reduction	Standards EN ISO 10140-3 EN ISO 717/2	ΔL _w = 13dB	ΔL _w = 4dB	ΔL _w = 19dB	ΔL _w = 7dB	ΔL _w = 13dB	ΔL _w = 13dB
Form of delivery							
Form of delivery	EN 24341 rolls	approx. 24lm x 2/3/4m	approx. 23lm x 2/4m	23lm x 2m	approx. 25lm x 2/4m	approx. 25lm x 2/4m	approx. 25 running metres x 2m/ 3m/ 4m
Environmental performances							
Total VOC emissions	ISO 16000-9 Classic 40	≤100 µg/m³ (after 28 days)					
Colours							
	-	30	36	12	18	18	35
CE Marking							
DoP number	-	0131-022-DoP-2018-10	0131-0038-DoP-2014-10	0131-0056-DoP-2015-01	0132-0061-DoP-2016-01	0132-0062-DoP-2016-01	0131-0005-DoP-2018-10



- Warmth and comfort
- Very comfortable flooring with 13dB acoustic
- 2.5mm total thickness
- Available in 2, 3 and 4 meter widths

TECHNICAL DATA

	Standards	TOPAZ 70
Classification		
Type of floor covering	ISO 10582	Heterogeneous compact floor coverings based on polyvinyl chloride
Classification	ISO 10874 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346	2.50mm
Wear layer thickness	ISO 24340	0.70mm
Total weight	ISO 23997	2 900g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Residual indentation	ISO 24343-1 (EN 433)	≤ 0.10mm
Reaction to fire	EN 13501-1	C _{fl} -s1
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W
		Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 717/2	ΔLw = 13dB
CE Marking		
DoP number	-	0131-022-DOP-2018-10

Clic

Black	Beige	Red	Clair	Grey
5626 015	5626 016	5626 017	5626 018	5626 020
5625 015	5625 016	5625 017	5625 018	5625 020
5624 015	5624 016	5624 017	5624 018	5624 020
Grege	Cobalt	Blue Grey	Warm grey	
5626 021	5626 069	5626 070	5626 071	
5625 021	5625 069	5625 070	5625 071	
5624 021	5624 069	5624 070	5624 071	

Baldosa

Grey Slate	Grege	Black	Light grey	Brown
5626 072	5626 073	5626 065	5626 067	5626 068
5625 072	5625 073	5625 065	5625 067	5625 068
5624 072	5624 073	5624 065	5624 067	5624 068

Stencil concrete


Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	Available in rolls: 2m Rolls length: 24lm Available in rolls: 3m Rolls length: 24lm Available in rolls: 4m Rolls length: 24lm	 Wood	

TOPAZ 70

Antik Oak

	Pebble grey		Light Natural		Light Brown		Light Yellow		Brown Natural
 5626 061		 5626 027		 5626 005		 5626 032		 5626 030	
 5625 061		 5625 027		 5625 005		 5625 032		 5625 030	
 5624 061		 5624 027		 5624 005		 5624 032		 5624 030	

Warm oak

	Soft brown		Light Grey		Light natural		Strong brown
 5626 046		 5626 058		 5626 059		 5626 075	
 5625 046		 5625 058		 5625 059		 5625 075	
 5624 046		 5624 058		 5624 059		 5624 075	

Winter pine

	Soft natural		Soft beige		Pebble grey		Smoke
 5626 044		 5626 045		 5626 074		 5626 057	
 5625 044		 5625 045		 5625 074		 5625 057	
 5624 044		 5624 045		 5624 074		 5624 057	

Woolland oak

	Natural		White		Grey
 5626 062		 5626 063		 5626 064	
 5625 062		 5625 063		 5625 064	
 5624 062		 5624 063		 5624 064	

Logistics Information

-  Available in rolls: 2m
Rolls length: 24lm
-  Available in rolls: 3m
Rolls length: 24lm
-  Available in rolls: 4m
Rolls length: 24lm



Page 474

Coordinated
accessories
offer



HETEROGENEOUS



RUBY 70

Nature - Light Raspberry, Raspberry and Orange Red

- Resistance and a safety touch
- Excellent resistance to indentation and abrasion
- Superior anti slip resistance (R10)

Nature



Middle Grege



Light Grege



Warm Medium Grey



Cold Dark Grey



Cold Light Grey



2509 8052



2508 6002



2509 9052



2509 9078



2508 6014



2509 9078



2509 8049



2508 6010



2509 9049



2509 8045



2508 6007



2509 9045



2509 8042



2508 6004



2509 9042



Cold Grey



Black



Yellow



Sand



Cold Medium Grey



2509 8043



2508 6005



2509 9043



2509 8046



2508 6008



2509 9046



2509 8064



2508 6011



2509 9064



2509 8063



2509 9063



2509 8044



2508 6006



2509 9044



Tomato



Fresh Blue



Dark Grege



Dark Blue



Light Raspberry



2509 8079



2508 6013



2509 9079



2509 8055



2508 6000



2509 9055



2509 8053



2509 9053



2509 8209



2508 6009



2509 9209



2509 8066



2509 9066




Raspberry



Lilac



Royal Purple



Spring Green



Turquoise



2509 8080



2509 9080



2509 8067



2509 9067



2509 8081



2509 9081



2509 8068



2509 9068



2509 8082



2509 9082



Royal Blue



Orange Red



Cognac



2509 8083



2509 9083



2509 8084



2509 9084



2509 8085



2509 9085

TECHNICAL DATA

	Standards	RUBY 70	RUBY 70 Acoustic
Classification			
Type of floor covering	ISO 10582	Heterogeneous compact floor coverings based on polyvinyl chloride	Polyvinyl chloride floor covering with foam layer
Classification	ISO 10874 commercial industrial	Classes: 34 43	Classes: 34 42
Characteristics			
Total thickness	ISO 24346	2.00mm	3.00mm
Wear layer thickness	ISO 24340	0.70mm	0.70mm
Total weight	ISO 23997	3 000g/m²	2 500g/m²
PU treatment	-	TopClean™	TopClean™
Wear layer binder content	ISO 10582	Type I	Type I
Technical performance			
Residual indentation	Best measured value	0.02mm	0.11mm
	ISO 24343-1 (EN 433)	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN 13501-1	B _f -s1 Glued on derivative wood panel	C _f -s1 Glued on derivative wood panel
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30	R9 μ ≥ 0.30
Dimensional stability	ISO 23999	≤ 0.10%	≤ 0.10%
Furniture leg	EN 424	No damage	No damage
Castor wheel test	ISO 4918	No damage	No damage
Curl resultant to heat	ISO 23999	≤ 8mm	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987	Not affected (0)	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.02m² K/W Suitable	0.04m² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Impact sound reduction	EN ISO 717/2	ΔLw = 4dB	ΔLw = 19dB
CE Marking			
DoP number	-	0131-0038-DoP-2014-10	0131-0056-DOP-2015-01

	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
Ruby 70		 Available in rolls: 2m Rolls length: 231m	 Nature  Wood	 100% 31% Recyclable Recycled content
Ruby 70 acoustic		 Available in rolls: 4m Rolls length: 231m  Ruby 70 Acoustic		 100% Recyclable

108 PRODUCT CATALOGUE 2019

PROFESSIONALS.TARKETT.COM 109

RUBY 70

Oak



Grey

 2509 8036
 2509 9036



Grey Beige

 2509 8035
 2509 9035



Middle Natural

 2509 8074
 2509 9074



Natural Honey

 2509 8075
 2509 9075



Beige

 2509 8076
 2509 9076

Hausmann



Dark Brown

 2509 8077
 2509 9077



Natural

 2509 8069
 2509 9069



Dark Grey

 2509 8070
 2509 9070



Warm Brown

 2509 8071
 2509 9071



Light Natural

 2509 8029
 2509 9029

Faro 2



Natural

 2509 8034
 2509 9034



Anthracite

 2509 8072
 2509 9072



Warm Beige

 2509 8073
 2509 9073

Logistics Information

-  Available in rolls: 2m
Rolls length: 231m
-  Available in rolls: 4m
Rolls length: 231m
-  Ruby 70 Acoustic



Faro 2 - Natural Honey

Page 474

Coordinated
accessories
offer



HETEROGENEOUS




TECHNICAL DATA

- Colours combinations between all-over designs and uni shades
- Available in 2 and 4 meter widths

METEOR 70

Elegant Oak - Natural

Fiber Wood



Light Grey

2510 4090
2510 3090



Grege


2510 4088
2510 3088



Grey

2510 4087
2510 3087

Fossil



Light Grege


2510 4012
2510 3012



Grege

2510 4014
2510 3014

Rock Mineral



Light Grege

2510 4016
2510 3016



Grey


2510 4017
2510 3017



Dark Grey

2510 4018
2510 3018

Stylish Concrete



Grey

2510 4009
2510 3009



Dark Grey

2510 4011
2510 3011

Elegant Oak



Natural

2510 4000
2510 3000



Light Brown

2510 4001
2510 3001



Brown


2510 4002
2510 3002



Dark Brown

2510 4003
2510 3003

Cliff Oak



Beige

2510 4004
2510 3004



Grey

2510 4005
2510 3005



Brown

2510 4006
2510 3006



Dark Brown

2510 4007
2510 3007

	Standards	METEOR 70
Classification		
Type of floor covering	ISO 10582	Heterogeneous compact floor coverings based on polyvinyl chloride
Classification	ISO 10874 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346	2.00mm
Wear layer thickness	ISO 24340	0.70mm
Total weight	ISO 23997	2650g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Residual indentation	Best measured value	0.04mm
	ISO 24343-1 (EN 433)	≤ 0.10mm
Reaction to fire	EN 13501-1	B _{fl} -s1 Glued on derivative wood panel
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 717/2	ΔLw = 7dB
CE Marking		
DoP number	-	0132-0061-DoP-2016-01

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	Available in rolls: 2m Rolls length: 251m Available in rolls: 4m Rolls length: 251m	 Wood	 100% 14% Recyclable recycled content



METEOR 55


Stylish Concrete - Grey

Cliff Oak



Beige

2510 6004
2510 5004



Grey

2510 6005
2510 5005




Brown

2510 6006
2510 5006



Dark Brown

2510 6007
2510 5007



Dark Brown

2510 6003
2510 5003

Elegant Oak



Natural

2510 6000
2510 5000



Light Brown

2510 6001
2510 5001



Brown

2510 6002
2510 5002



Light Grey

2510 6090
2510 5090



Grege

2510 6088
2510 5088

Fiber Wood



Grey

2510 6087
2510 5087



Grey

2510 6009
2510 5009



Dark Grey

2510 6011
2510 5011



Light Grege

2510 6012
2510 5012



Grege

2510 6014
2510 5014

Fossil

Rock Mineral



Light Grege

2510 6016
2510 5016



Grey

2510 6017
2510 5017



Dark Grey

2510 6018
2510 5018

TECHNICAL OVERVIEW

	Standards	METEOR 55
Classification		
Type of floor covering	ISO 10582	Heterogeneous compact floor coverings based on polyvinyl chloride
Classification	ISO 10874 commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346	2.00mm
Wear layer thickness	ISO 24340	0.55mm
Total weight	ISO 23997	2 300g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Residual indentation	Best measured value	0.05mm
	ISO 24343-1	≤ 0.10mm
Reaction to fire	EN 13501-1	B _{fl} -s1 glued on derivative wood panel
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999	≤ 0.10%
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostratic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 717/2	ΔL _w = 13dB
Form of delivery	EN 24341 (EN 426)	approx. 25lm x 2/4m
Colours	-	18
CE Marking		
DoP number	-	0132-0062-DoP-2016-01

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	Available in rolls: 2m Rolls length: 25lm Available in rolls: 4m Rolls length: 25lm	Wood	



CLASSIC 40

Moda

Grey Beige	Anthracite	Grey	Black	Beige Red
5719 016	5719 001	5719 004	5719 011	5719 008
5715 016	5715 001	5715 004	5715 011	5715 008
5708 016	5708 001	5708 004	5708 011	5708 008

Modern Silver

Gold	Beige	Grey	Blue	White Gold
5719 018	5719 019	5719 020	5719 021	5719 022
5715 018	5715 019	5715 020	5715 021	5715 022
5708 018	5708 019	5708 020	5708 021	5708 022

TECHNICAL OVERVIEW

	Standards	CLASSIC 40
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact floor covering based on polyvinyl chloride
Classification	ISO 10874 (EN 685) commercial	Class: 32
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.40mm
Total weight	ISO 23997 (EN 430)	2 150g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Residual indentation	ISO 24343-1 (EN 433)	≤ 0.10mm
Reaction to fire	EN 13501-1	C _{fi} - s1
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999	≤ 0.40%
Castor chair	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostatic properties	EN 1815	≤ 2kV on concrete
Chemical resistance	ISO 26987 (EN 423)	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	NF EN ISO 717 / 2	ΔL _w = 13dB
Form of delivery	EN 24341 (EN 426)	approx. 25 running metres x 2m / 3m / 4m
Colours		
	-	35
CE Marking		
DoP number	-	0131-0005-DOP-2018-10

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	Available in rolls: 2m Rolls length: 25lm Available in rolls: 3m Rolls length: 25lm Available in rolls: 4m Rolls length: 25lm	 Wood	



CLASSIC 40

Harmony Oak - Light Grey

- Comfortable floor with 13dB acoustic
- Available in 2, 3 and 4 meter widths
- Woods & neutral designs

Page 474

Coordinated accessories offer



Antia - Grey Black / Black

Harmony Oak

	Light Brown		Cold grey		Natural		Warm brown		Light Grey
5620 042		5620 0043		5620 044		5620 045		5620 046	
5619 042		5619 0043		5619 044		5619 045		5619 046	
5618 042		5618 0043		5618 044		5618 045		5618 046	

Apunara Oak

	Warm beige		Grey		Light Grey		White		Natural
5620 047		5620 048		5620 0049		5620 050		5620 051	
5619 047		5619 048		5619 0049		5619 050		5619 051	
5618 047		5618 048		5618 0049		5618 050		5618 051	

Canadian Pine

	Silk Grey		Warm beige
5620 053		5620 054	
5619 053		5619 054	
5618 053		5618 054	

Logistics Information

- Available in rolls: 2m
Rolls length: 25lm
- Available in rolls: 3m
Rolls length: 25lm
- Available in rolls: 4m
Rolls length: 25lm

Teak

	Brown
5620 005	
5619 005	
5618 005	

Gea

	Light Brown		Light Warm Brown		Smoked grey
5620 003		5620 025		5620 040	
5619 003		5619 025		5619 040	
5618 003		5618 025		5618 040	

Antia

	Black		Blue Grey		Warm Grey		Warm beige
5620 011		5620 0041		5620 055		5620 056	
5619 011		5619 0041		5619 055		5619 056	
5618 011		5618 0041		5618 055		5618 056	

Rock

	Warm grey		Warm beige		Smoked		Grey Black
5620 037		5620 038		5620 039		5620 020	
5619 037		5619 038		5619 039		5619 020	
5618 037		5618 038		5618 039		5618 020	



OUR SELECTION OF ACCESSORIES FOR HETEROGENEOUS



1

ProtectWALL

Protects the wall from impacts.

Cap

Provides a perfect finish and protects the edge of the wall covering.

See p. 494 for detailed info

Abstract 26501 011



2

Set-on skirting

KS61

PVC semi-rigid skirting for decorative use.

See p. 477 for detailed info




3

Tactile guide

Specially designed for visually impaired people to help finding their way with blind stick.

See p. 491 for detailed info




4

Expansion joint

Expansion joint sections offer a perfect solution to avoid tear or dish from screed.

See p. 475 for detailed info



5

Welding rod

Secures the junction between 2 rolls of flooring or wall and floor coverings.

See p. 474 for detailed info



6

Cove former

Improves hygiene inside wall corner and make maintenance easier.

See p. 476 for detailed info



7

Transition profile

TMT

Aluminium profile used at doorstep to join different floorings.

See p. 475 for detailed info

