

Luxury Vinyl Tiles

HIGH TRAFFIC

LVT GLUE-DOWN

- 182 iD Mixonomi
- 186 iD Supernature & Tattoo
- 194 iD Inspiration 55 & High Traffic 70 N
- 206 iD Inspiration 40

LVT CLICK

- 212 iD Click Ultimate 70
- 216 iD Inspiration Click 55 & High Traffic 70 N

LVT LOOSE-LAY

- 224 iD Inspiration Loose-lay N
- 228 iD TILT N

LVT LOOSE LAY ACOUSTIC

- 230 iD Square N

LIGHT & MODERATE TRAFFIC

LVT GLUE-DOWN

- 234 iD Essential 30


LVT CLICK

- 238 iD Essential Click



LUXURY VINYL TILES

Page 474
Coordinated accessories offer

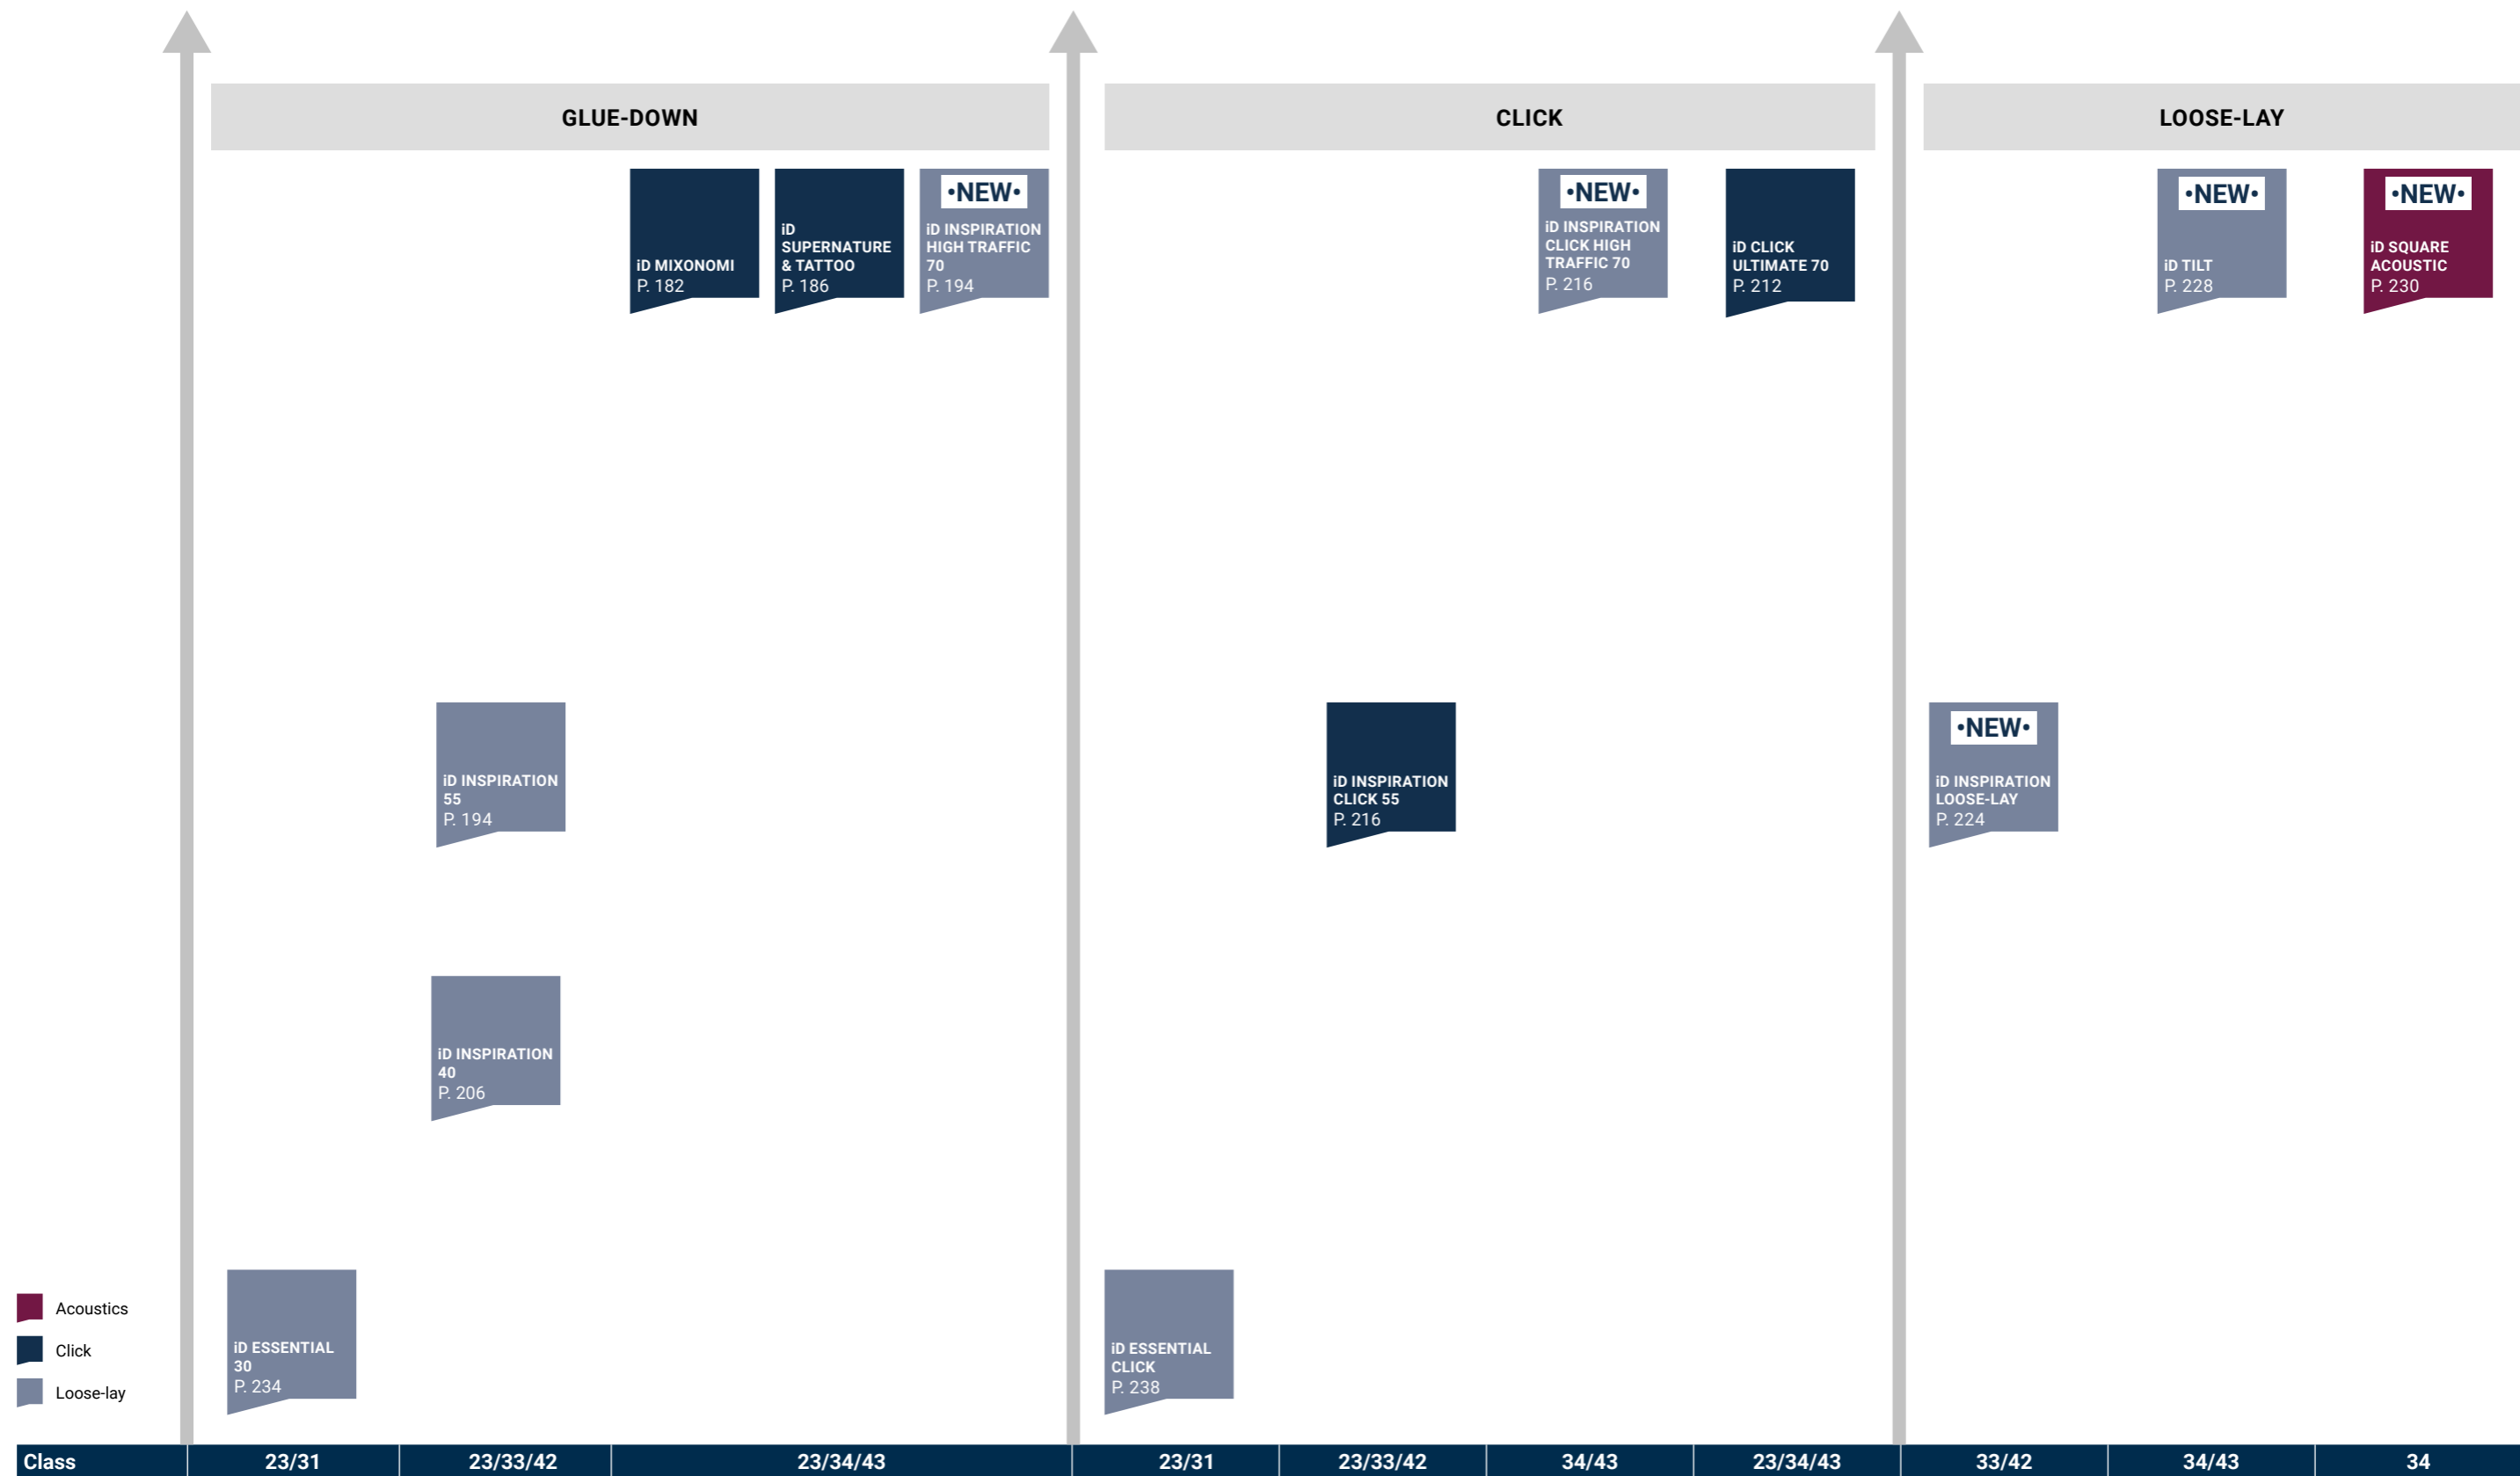



A premium LVT glue-down collection for all commercial areas, iD Inspiration distinctive and fully customisable designs are particularly suited for retail, hospitality and workplace

SENSORIAL BENEFITS


- Coordinated colours and designs for over 75 000 potential combinations
- Create your own personalised flooring with Tarkett's customisation concept
- For better resistance through their lifetime, all iD Supernature & Tattoo and iD Mixonomi Designs are produced on our iD Inspiration High Traffic 70 profile

FUNCTIONAL BENEFITS

- Great dimensional stability
- Save time and money with easy maintenance
- No wax, no polish for life with TopClean XP™!
- All designs available in 0.55mm and 0.70mm High Traffic wear layers


ENVIRONMENTAL BENEFITS

- 100% recyclable
- 100% phthalate-free
- Ultra low VOC (<10 µg/m³)

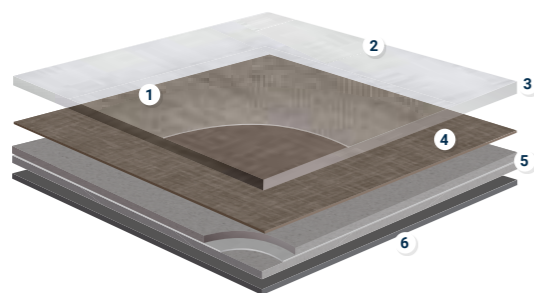

iD INSPIRATION 55-70

- Surface embossing & textures: close to real materials
- TopClean XP™ PUR reinforcement: extreme resistance and easy low-cost maintenance
- 0.55/0.70mm pure PVC transparent wear layer: exceptionally hard-wearing and indentation resistant
- 110 design options in high definition printing: with great customisation possibilities
- Unique composite structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre: exceptional dimensional stability and excellent resistance to tear and indentation
- PVC backing

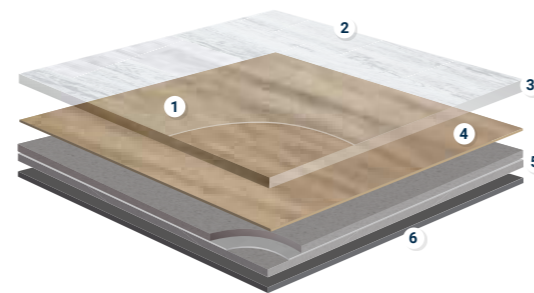

iD INSPIRATION 40

- Surface embossing & textures: close to real materials
- TopClean XP™ PUR reinforcement: extreme resistance and easy low-cost maintenance
- 0.40mm pure PVC transparent wear layer: hard-wearing and indentation resistant
- 34 design options in high definition printing: realistic designs
- Unique composite structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre: exceptional dimensional stability and excellent resistance to tear and indentation
- PVC backing

TECHNICAL OVERVIEW

	Standards	iD Mixonomi	iD Supernature & Tattoo	iD Inspiration High Traffic 70	iD Inspiration 55	iD Inspiration 40
Certification & Classification						
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering				
Classification	EN ISO 10874	Domestic: 23 Commercial: 34 Industrial: 43	Domestic: 23 Commercial: 34 Industrial: 43	Domestic: 23 Commercial: 34 Industrial: 43	Domestic: 23 Commercial: 33 Industrial: 42	Domestic: 23 Commercial: 33 Industrial: 42
Technical Characteristics						
Total thickness	EN ISO 24346	2,5 mm				
Wear layer thickness	EN ISO 24340	0,7 mm			0,55 mm	0,55 mm
Total weight	EN ISO 23997	3950 g/m²	3950 g/m²	3950 g/m²	3850 g/m²	3850 g/m²
Wear layer binder content	EN ISO 10582	Type I				
Dimensions	EN ISO 24342	Diamond 38,486 x 66,66 cm, 20 planks/box = 2.56 m² Herringbone Left 8,33 x 38,486 cm, 80 planks/box = 2.56 m² Herringbone Right 8,33 x 38,486 cm, 80 planks/box = 2.56 m² Hexagon Large 33,33 x 38,486 cm, 20 planks/box = 1.92 m² Hexagon Small 20 x 23,094 cm, 60 planks/box = 2.04 m² Rectangle 10 x 50 cm, 75 planks/box = 3.75 m² Square 25 x 25 cm, 60 planks/box = 3.72 m² Trapèze 16,66 x 38,486 cm, 40 planks/box = 1.92 m² Triangle Large 38,486 x 38,486 cm, 40 planks/box = 2.56 m² Triangle Small 19,243 x 19,243 cm, 120 planks/box = 1.92 m²	Standard formats Planks 10 x 50 cm 75 planks per box = 3.75 m² 16,66 x 100 cm 22 planks per box = 3.67 m² 12,5 x 122 cm 24 planks per box = 3.66 m² 20 x 122 cm 15 planks per box = 3.66 m² Tiles 25 x 50 cm (for stone designs only) 30 tiles per box = 3.75 m² 50 x 50 cm (for stone designs only) 15 tiles per box = 3.75 m² 50 x 100 cm* (for stone designs only) 7 tiles per box = 3.5 m² 100 x 100 cm* (for stone designs only) 70 tiles per pallet 100 x 150 cm* (for stone designs only) 47 tiles per pallet Special formats Small Hexagon 20 x 23,094 cm 60 planks per box = 2.08 m² Large Hexagon 33,33 x 38,486 cm 20 planks per box = 1.92 m² Left & Right Herringbone 8,33 x 38,486 cm 80 planks per box = 2.56 m²	Planks 16,66 x 100 cm, 22 planks/box = 3.67 m² 12,5 x 122 cm, 24 planks/box = 3.66 m² 20 x 122 cm, 15 planks/box = 3.66 m² 25 x 122 cm, 12 planks/box = 3.66 m² 25 x 150 cm, 10 planks/box = 3.75 m² Tiles 25 x 50 cm, 30 tiles/box = 3.75 m² 50 x 50 cm, 15 tiles/box = 3.75 m² 50 x 100 cm, 7 tiles/box = 3.50 m² 100 x 100 cm	Planks 16,66 x 100 cm, 22 planks/box = 3.67 m² 12,5 x 122 cm, 24 planks/box = 3.66 m² 20 x 122 cm, 15 planks/box = 3.66 m² 25 x 122 cm, 12 planks/box = 3.66 m² 25 x 150 cm, 10 planks/box = 3.75 m² Tiles 25 x 50 cm, 30 tiles/box = 3.75 m² 50 x 50 cm, 15 tiles/box = 3.75 m² 50 x 100 cm, 7 tiles/box = 3.50 m² 100 x 100 cm	Planks 16,66 x 100 cm, 22 planks/box = 3.67 m² 12,5 x 122 cm, 24 planks/box = 3.66 m² 20 x 122 cm, 15 planks/box = 3.66 m² 25 x 122 cm, 12 planks/box = 3.66 m² 25 x 150 cm, 10 planks/box = 3.75 m² Tiles 25 x 50 cm, 30 tiles/box = 3.75 m² 50 x 50 cm, 15 tiles/box = 3.75 m² 50 x 100 cm, 7 tiles/box = 3.50 m² 100 x 100 cm
Surface treatment (PUR)	-	Yes - TopCleanXP™				
Bevelled edges	-	No			Yes	
Embossing in Register	-				Yes	
Technical Performance						
Dimensional stability	EN ISO 23999	≤ 0,10 %				
Curl resultant to heat	EN ISO 23999	≤ 2 mm				
Reaction to fire	EN 13501-1	B _s -s1 glued over concrete substrate B _s -s1 glued over wood substrate				
Residual indentation	EN ISO 24343-1	≤ 0,05 mm				
Furniture leg	EN 424	No damage				
Castor chair	EN ISO 4918 - EN 425	No damage				
Impact sound reduction	EN ISO 717-2	ΔLw = 2 dB				
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,ew} < 85 dB)				
Thermal resistance	EN ISO 10456	0,02 m² K/W				
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6				
Chemical resistance	EN ISO 26987	Very good				
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30			R9 / R10 depending on embossing μ ≥ 0,30	
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm				
Peeling resistance	EN ISO 24345	≥ 50N / 50mm				
Underfloor heating	-	Suitable - max. 27 °C				
Environmental Tag						
VOC emission	ISO 16000-9	≤ 10µg/m³				
Recycled content	-	32%				
Recyclable	-	100%				
Plasticizer	-	Phthalate-free				
Warranties						
Commercial warranty	-	10 years				
CE Marking						
DoP number	-	0004-0041-DOP-2013-04	0004-0041-DOP-2013-04	0004-0041-DOP-2016-09	0004-0038-DOP-2016-09	0004-0038-DOP-2016-09

iD MIXONOMI

- Premium LVT range to play easily with Colours & Shapes
- Designed for creative architects & designers
- Ultra low VOC emissions contribute to better indoor air quality
- Discover our new Mixonomi Jewels: Inspired by diamond cutting techniques, we push iD Mixonomi to its utmost potential by calling upon our Floorcraft cutting and assembling services

TECHNICAL DATA

	Standards	iD Mixonomi
Certification & Classification		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	Domestic: 23 Commercial: 34 Industrial: 43
Technical Characteristics		
Total thickness	EN ISO 24346	2,5 mm
Wear layer thickness	EN ISO 24340	0,7 mm
Total weight	EN ISO 23997	3950 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342	Diamond 38,486 x 66,66 cm, 20 planks/box = 2.56 m ² Herringbone Left 8,33 x 38,486 cm, 80 planks/box = 2.56 m ² Herringbone Right 8,33 x 38,486 cm, 80 planks/box = 2.56 m ² Hexagon Large 33,33 x 38,486 cm, 20 planks/box = 1.92 m ² Hexagon Small 20 x 23,094 cm, 60 planks/box = 2.04 m ² Rectangle 10 x 50 cm, 75 planks/box = 3.75 m ² Square 25 x 25 cm, 60 planks/box = 3.72 m ² Trapèze 16,66 x 38,486 cm, 40 planks/box = 1.92 m ² Triangle Large 38,486 x 38,486 cm, 40 planks/box = 2.56 m ² Triangle Small 19,243 x 19,243 cm, 120 planks/box = 1.92 m ²
Surface treatment (PUR)	-	Yes - TopCleanXP™
Bevelled edges	-	No
Embossing in Register	-	-
Technical Performance		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _s -s1 glued over concrete substrate B _s -s1 glued over wood substrate*
Residual indentation	EN ISO 24343-1	≤ 0,05 mm
Furniture leg	EN 424	No damage
Castor chair	EN ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 2 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,RW} < 85 dB)
Thermal resistance	EN ISO 10456	0,02 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Very good
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating	-	Suitable - max. 27 °C
Warranties		
Commercial warranty	-	10 years
CE Marking		
DoP number	-	0004-0041-DOP-2013-04

Logistics Information	Sustainability credentials
<p>Combinable formats Available in 6 fully combinable formats</p> <p>24 444-- 24 445-- 24 446-- 24 443-- 38,486 x 66,66 cm 8,33 x 38,486 cm 8,33 x 38,486 cm 38,486 cm/side</p> <p>24 442-- 24 440-- 24 441-- 19,243 cm/side 33,33 x 38,486 cm 16,66 x 38,486 cm</p> <p>Mini-shapes Available in 3 mini-shapes for an all-over look</p> <p>24 447-- 24 448-- 24 449-- 20 x 23,094 cm 25 x 25 cm 10 x 50 cm</p>	<p>Sustainability credentials</p>



iD MIXONOMI



Logistics Information
















Combinable formats Available in 6 fully combinable formats

	24 444		24 445		24 446		24 443		24 442		24 440		24 441
38,486 x 66,66 cm		8,33 x 38,486 cm		8,33 x 38,486 cm		38,486 cm/side		19,243 cm/side		33,33 x 38,486 cm		16,66 x 38,486 cm	

Mini-shapes Available in 3 mini-shapes for an allover look

	24 447		24 448		24 449
20 x 23,094 cm		25 x 25 cm		10 x 50 cm	

	Carbon		Silver		Brass		Copper		
034		033		032		031			
	Milk		Ivory		Banana		Drage		Mint
001		002		003		004		005	
	Forget Me Not		Capuccino		Craft		Dune		Colombo
006		007		008		009		010	
	Rosewood		Poppy		Jade		Aqua		Ashes
011		012		013		014		015	
















	Clay		Chestnut		Ochre		Terracotta		Strawberry
016		017		018		019		020	
	Peacock		Cobalt		Charcoal		Liquorice		Tobacco
021		022		023		024		025	
	Kahlua		Burgundy		Emerald		Kensington Green		Prussian Blue
026		027		028		029		030	

iD SUPERNATURE & TATTOO

- A premium wood, stone, concrete LVT offer effect
- High definition digital printing natural shading from real material scanning
- No repetition effect
- Select your layout/format, your pattern and your perfect shade to match your concept

TECHNICAL DATA

	Standards	iD Supernature & Tattoo
Certification & Classification		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	Domestic: 23 Commercial: 34 Industrial: 43
Technical Characteristics		
Total thickness	EN ISO 24346	2,5 mm
Wear layer thickness	EN ISO 24340	0,7 mm
Total weight	EN ISO 23997	3950 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342	Standard formats Planks 10 x 50 cm 75 planks per box = 3.75 m ² 16,66 x 100 cm 22 planks per box = 3.67 m ² 12,5 x 122 cm 24 planks per box = 3.66 m ² 20 x 122 cm 15 planks per box = 3.66 m ² Tiles 25 x 50 cm (for stone designs only) 30 tiles per box = 3.75 m ² 50 x 50 cm (for stone designs only) 15 tiles per box = 3.75 m ² 50 x 100 cm* (for stone designs only) 7 tiles per box = 3.5 m ² 100 x 100 cm* (for stone designs only) 70 tiles per pallet 100 x 150 cm* (for stone designs only) 47 tiles per pallet Special formats Small Hexagon 20 x 23.094 cm 60 planks per box = 2.08 m ² Large Hexagon 33.33 x 38.486 cm 20 planks per box = 1.92 m ² Left & Right Herringbone 8.33 x 38.486 cm 80 planks per box = 2.56 m ²
Surface treatment (PUR)	-	Yes - TopCleanXP™
Bevelled edges	-	No
Embossing in Register	-	-
Technical Performance		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	"Bfl-s1 glued over concrete substrate Bfl-s1 glued over wood substrate"
Residual indentation	EN ISO 24343-1	≤ 0,05 mm
Furniture leg	EN 424	No damage
Castor chair	EN ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 2 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,ew} < 85 dB)
Thermal resistance	EN ISO 10456	0,02 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Very good
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating	-	Suitable - max. 27 °C
Warranties		
Commercial warranty	-	10 years
CE Marking		
DoP number	-	0004-0041-DOP-2013-04

Surface Treatment	Logistics Information	Sustainability credentials
 	Available in planks : Standard formats  24 424 ---  24 425 ---  24 420 ---  24421 ---	    
	Available in special formats  24438 ---  24439 ---  24436 ---  24437 ---	

Belgian - Stone - Abaca - Ashen - Cotton - Smoke



ID SUPERNATURE & TATTOO

Page 474
Coordinated accessories offer


Logistics Information

Available in planks : Standard formats

- 24 424 -- 10 x 50cm
- 24 425 -- 16.66 x 100cm
- 24 420 -- 12.5 x 122cm
- 24421 -- 20 x 122cm

Available in special formats

- 24438 -- 20 x 23.094cm Small Heggagone
- 24439 -- 33.33 x 38.486cm Large Heggagone
- 24436 -- 8.33 x 38.486cm Left Herringbone
- 24437 -- 8.33 x 38.486cm Right Herringbone

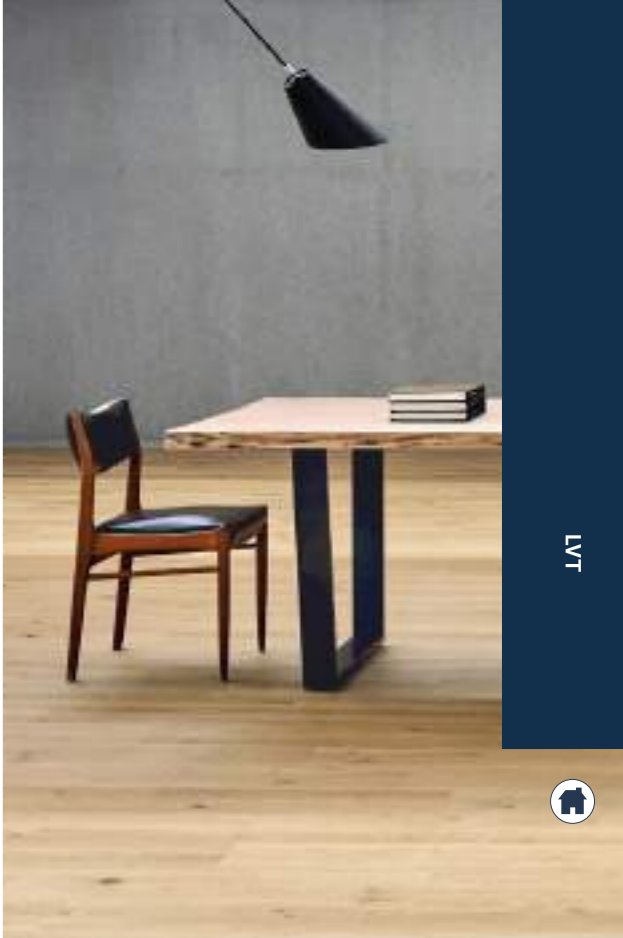

LVT



Garden Oak

000	Salt	001	Silver	002	Ashen	003	Anthracite
007	Cotton	006	Smoke	005	Clay	004	Basalt
008	Linen	009	Ginger	010	Abaca	011	Hazel
015	Sand	014	Curry	013	Cinnamon	012	Pecan

Park Oak


100	Salt	101	Silver	102	Ashen	103	Anthracite
107	Cotton	106	Smoke	105	Clay	104	Basalt
108	Linen	109	Ginger	110	Abaca	111	Hazel
115	Sand	114	Curry	113	Cinnamon	112	Pecan

These 16 natural shades are available in 7 formats, see page 187 for more details.



iD SUPERNATURE & TATTOO

Page 474
Coordinated accessories offer

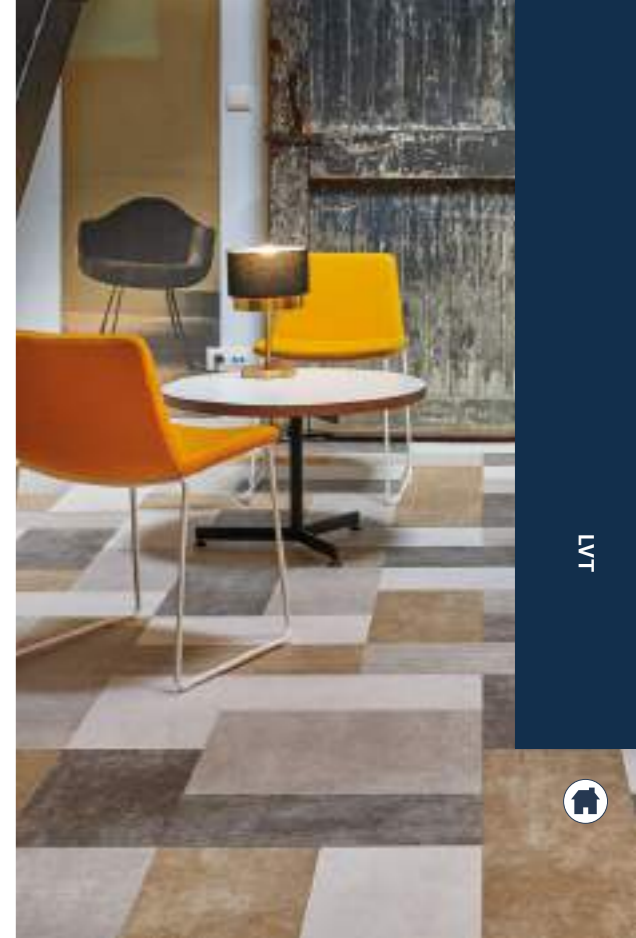

Logistics Information

- Available in planks : Standard formats**
- 24 424 -- 10 x 50cm
 - 24 425 -- 16.66 x 100cm
 - 24 420 -- 12.5 x 122cm
 - 24421 -- 20 x 122cm
- Available in special formats**
- 24438 -- 20 x 23.094cm Small Hegagone
 - 24439 -- 33.33 x 38.486cm Large Hegagone
 - 24436 -- 8.33 x 38.486cm Left Herringbone
 - 24437 -- 8.33 x 38.486cm Right Herringbone

Forest Oak



Belgian Stone




These 16 natural shades are available in 7 formats, see page 187 for more details.

iD SUPERNATURE & TATTOO




Patina Concrete



iD Tattoo (scale 1/5)

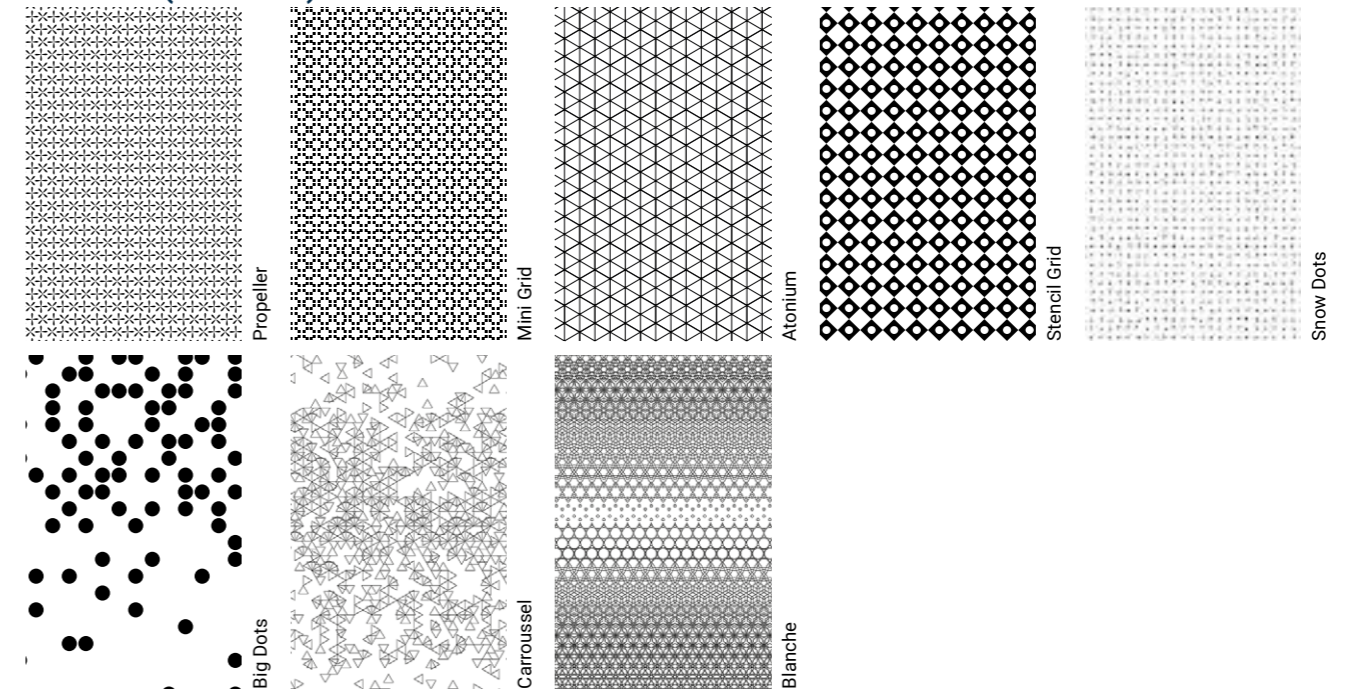


iD Tattoo (scale 1/10)

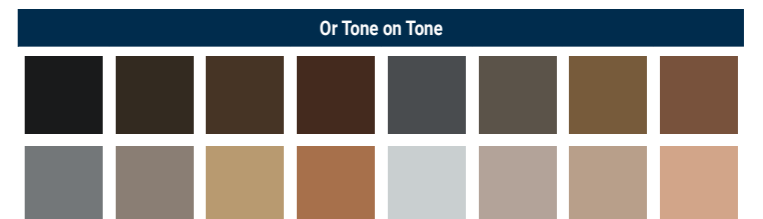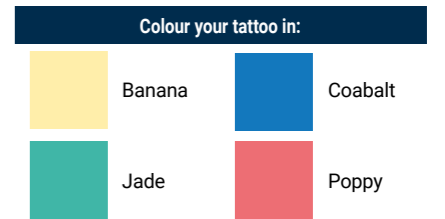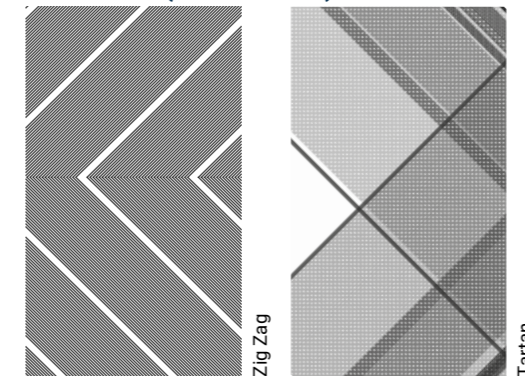

Logistics Information

Available in planks : Standard formats



Available in special formats



These 16 natural shades are available in 7 formats, see page 187 for more details.































iD INSPIRATION 55 & HIGH TRAFFIC 70

•NEW•

- Highly resistant product with 0.55mm and 0.70mm transparent wear-layer
- Great customisation possibilities
- Made in Europe
- Ultra low VOC contributing to better indoor air quality

TECHNICAL DATA

	Standards	iD Inspiration High Traffic 70	iD Inspiration 55
Certification & Classification			
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering	
Classification	EN ISO 10874	Domestic: 23 Commercial: 34 Industrial: 43	Domestic: 23 Commercial: 33 Industrial: 42
Technical Characteristics			
Total thickness	EN ISO 24346	2,5 mm	
Wear layer thickness	EN ISO 24340	0.7 mm	0.55 mm
Total weight	EN ISO 23997	3950 g/m ²	3850 g/m ²
Wear layer binder content	EN ISO 10582	Type I	
Dimensions	EN ISO 24342	Planks 16,66 x 100 cm, 22 planks/box = 3,67 m ² 12,5 x 122 cm, 24 planks/box = 3,66 m ² 20 x 122 cm, 15 planks/box = 3,66 m ² 25 x 122 cm, 12 planks/box = 3,66 m ² 25 x 150 cm, 10 planks/box = 3,75 m ² Tiles 25 x 50 cm, 30 tiles/box = 3,75 m ² 50 x 50 cm, 15 tiles/box = 3,75 m ² 50 x 100 cm, 7 tiles/box = 3,50 m ² 100 x 100 cm	
Surface treatment (PUR)	-	Yes - TopCleanXP™	
Bevelled edges	-	Yes	
Embossing in Register	-	Yes	
Technical Performance			
Dimensional stability	EN ISO 23999	≤ 0,10 %	
Curl resultant to heat	EN ISO 23999	≤ 2 mm	
Reaction to fire	EN 13501-1	B _f -s1 glued over concrete substrate B _f -s1 glued over wood substrate	
Residual indentation	EN ISO 24343-1	≤ 0,05 mm	
Furniture leg	EN 424	No damage	
Castor chair	EN ISO 4918 - EN 425	No damage	
Impact sound reduction	EN ISO 717-2	ΔLw = 2 dB	
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,w} < 85 dB)	
Thermal resistance	EN ISO 10456	0,02 m ² K/W	
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6	
Chemical resistance	EN ISO 26987	Very good	
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0,30	
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm	
Peeling resistance	EN ISO 24345	≥ 50N / 50mm	
Underfloor heating	-	Suitable - max. 27 °C	
Warranties			
Commercial warranty	-	10 years	
CE Marking			
DoP number	-	0004-0041-DOP-2016-09	0004-0038-DOP-2016-09


Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
 	Available in planks  iD 55: 24235 --  iD 70: 24205 --  iD 55: 24230 --  iD 70: 24200 --  iD 55: 24231 --  iD 70: 24201 --  iD 55: 24232 --  iD 70: 24202 --  iD 55: 24233 --  iD 70: 24203 --	 Wood  Square tiles  Rectangular tiles	 PHthalate FREE  100% Recyclable  Restart  MHS MATERIAL HEALTH STATEMENT  EPD
	Available in tiles  iD 55: 24236 --  iD 70: 24206 --  iD 55: 24237 --  iD 70: 24207 --  iD 55: 24238 --  iD 70: 24208 --  iD 55: 24239 --  iD 70: 24209 --		



**iD INSPIRATION 55
& HIGH TRAFFIC 70**

Antik Oak - Grey



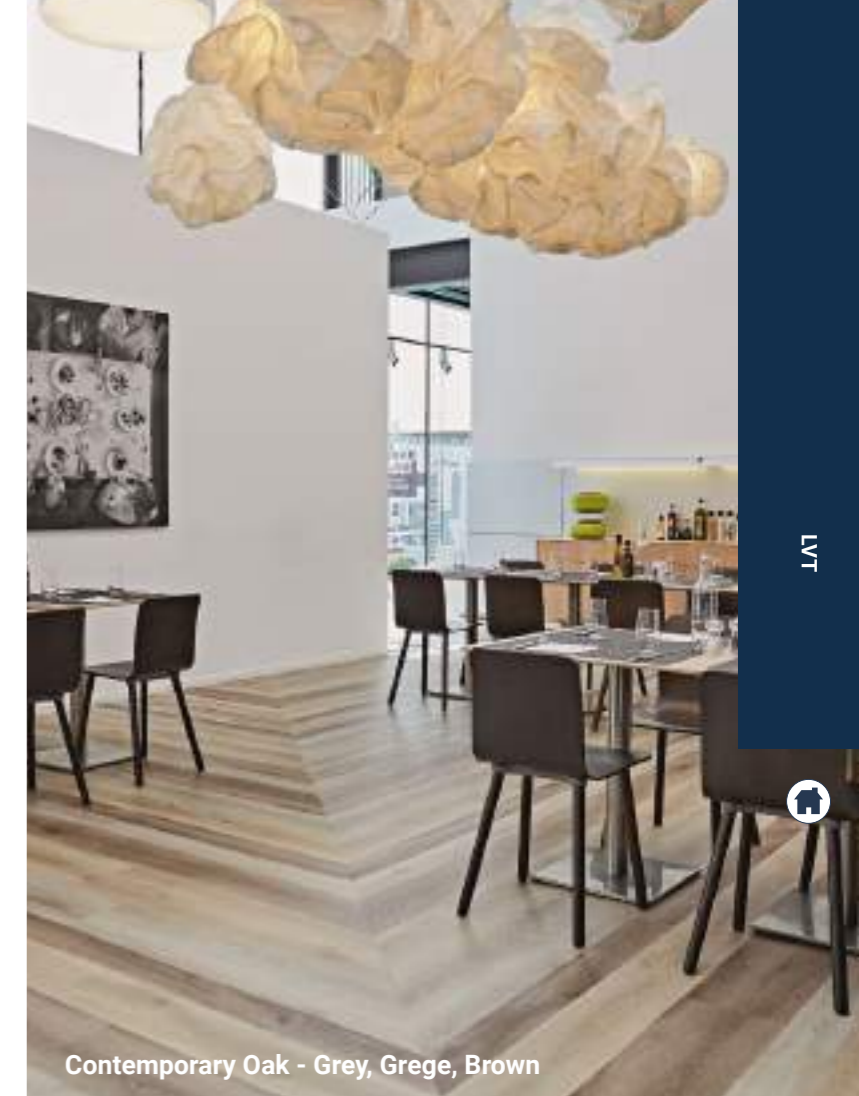


Page 474
Coordinated
accessories
offer



Contemporary Oak - Grey, Grege, Brown

Logistics Information



Available in planks

 ID 55: 24235 — ID 70: 24205 —	 ID 55: 24230 — ID 70: 24200 —	 ID 55: 24231 — ID 70: 24201 —
 ID 55: 24232 — ID 70: 24202 —	 ID 55: 24233 — ID 70: 24203 —	

Antik Oak




Scandinavian Oak

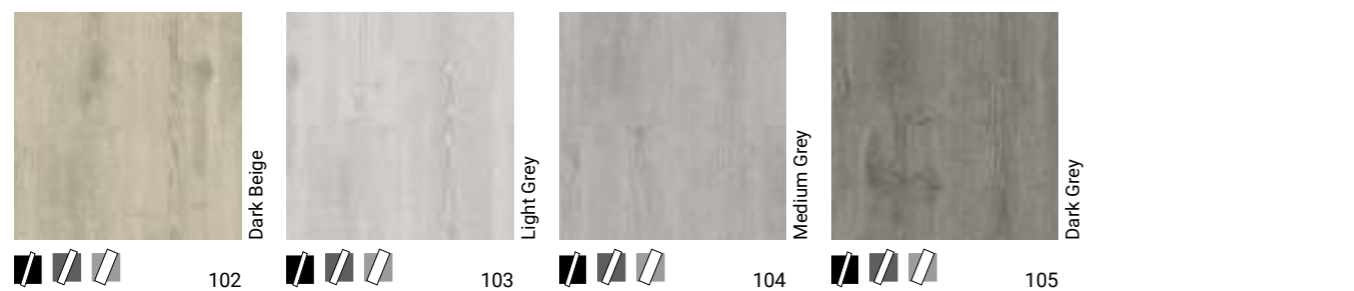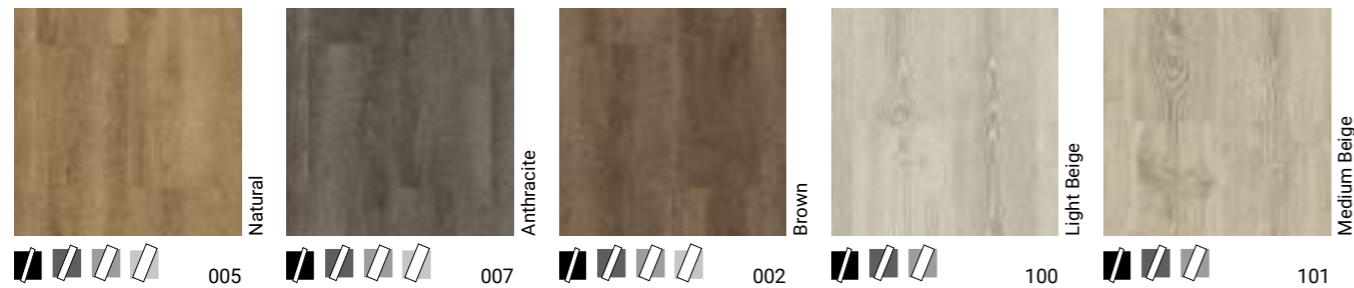

Contemporary Oak



Rustic Oak

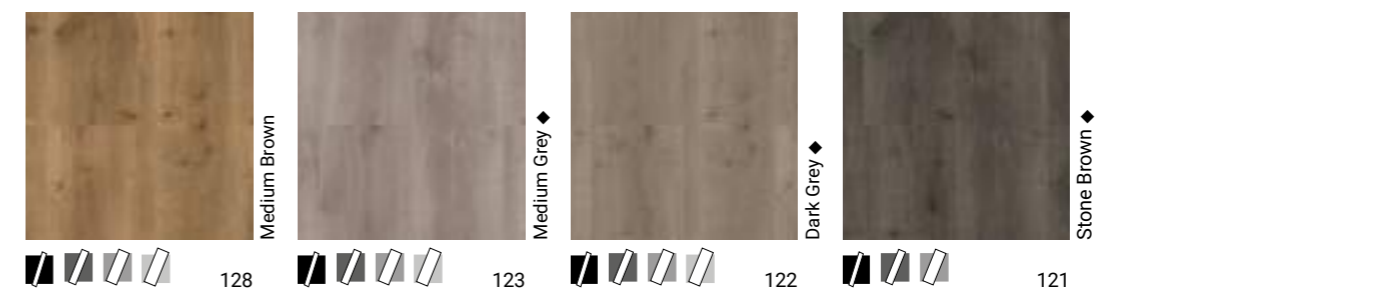

◆ Available also in iD Inspiration Click



iD INSPIRATION 55 & HIGH TRAFFIC 70

Elm - Light Grey, Natural

Page 474
Coordinated
accessories
offer



Pallet Pine - White, Natural, Brown

LVT

ELM

Light Grey ♦	Beige ♦	Natural ♦	Grege	Brown
113	114	115	116	117
English Oak				
Light Beige	Grey Beige	Beige	Light	Natural
028	029	024	026	027
Wenge				
Brown	Grege	Natural	Black	Grey
025	012	010	009	011
Trend Line				
Silver	Interferential	Black		
090	089	088		

Pallet Pine

White	Beige	Natural	Brown
030	031	032	033
Brushed Pine			
White	Grey	Natural	Brown
016	014	015	013
Patina Ash			
Beige ♦	Grey ♦	Brown ♦	
106	108	107	
Vintage Teak			
Grey	Natural		
092	093		

Logistics Information

Available in planks

	iD 55: 24235 --- iD 70: 24205 ---		iD 55: 24230 --- iD 70: 24200 ---		iD 55: 24231 --- iD 70: 24201 ---
	16,66 x 100cm		12,5 x 122cm		20 x 122cm
	iD 55: 24232 --- iD 70: 24202 ---		iD 55: 24233 --- iD 70: 24203 ---		
	25 x 122cm		25 x 150cm		


♦ Available also in iD Inspiration Click



iD INSPIRATION 55 & HIGH TRAFFIC 70

Oxide - Copper, Black Steel


Page 474
Coordinated
accessories
offer

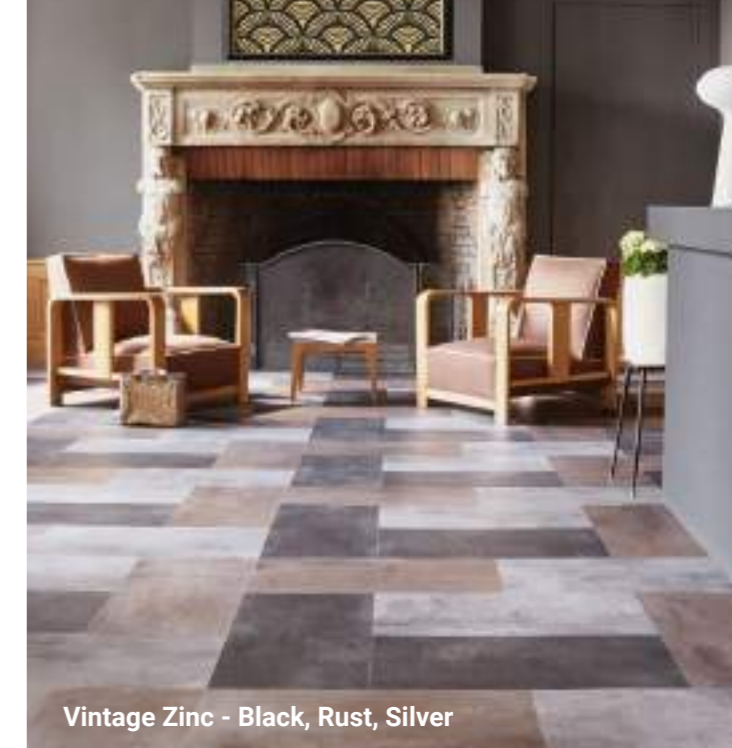


Vintage Zinc - Black, Rust, Silver




Rock

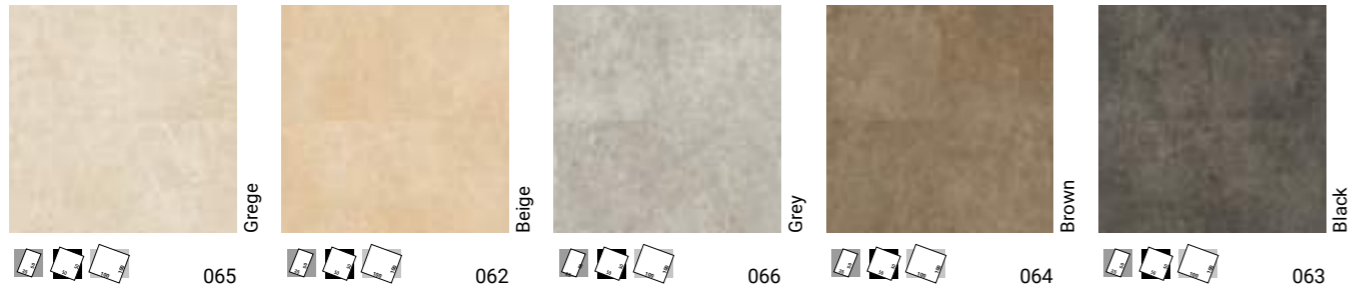

Bardiglio

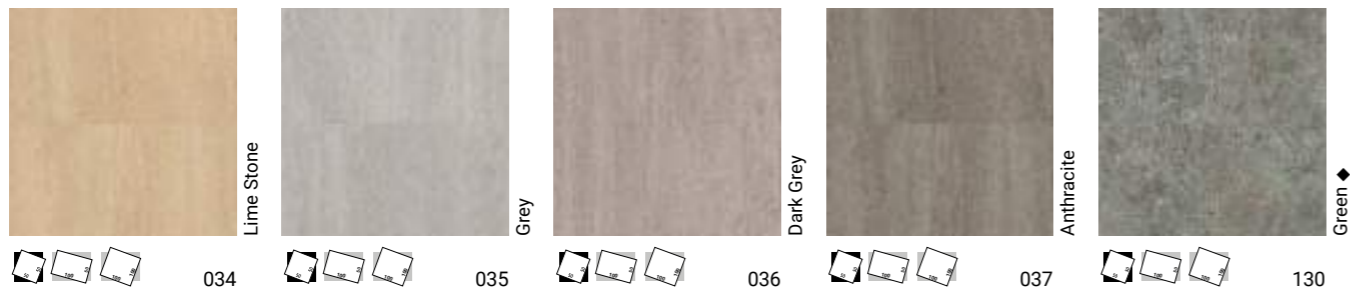


Terrazzo

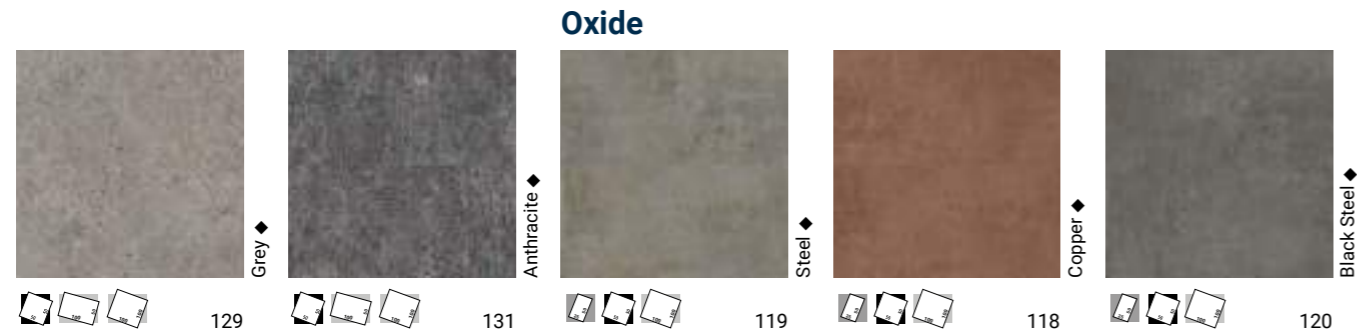


Composite





Polished Concrete

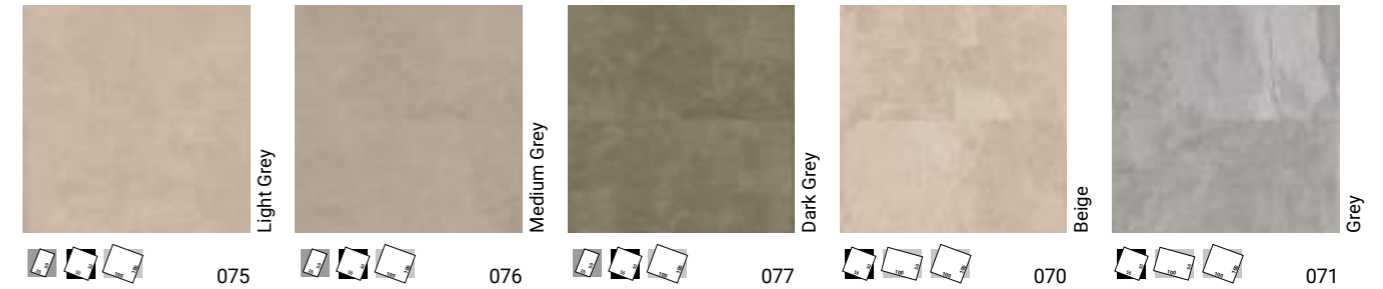

Rustic Slate

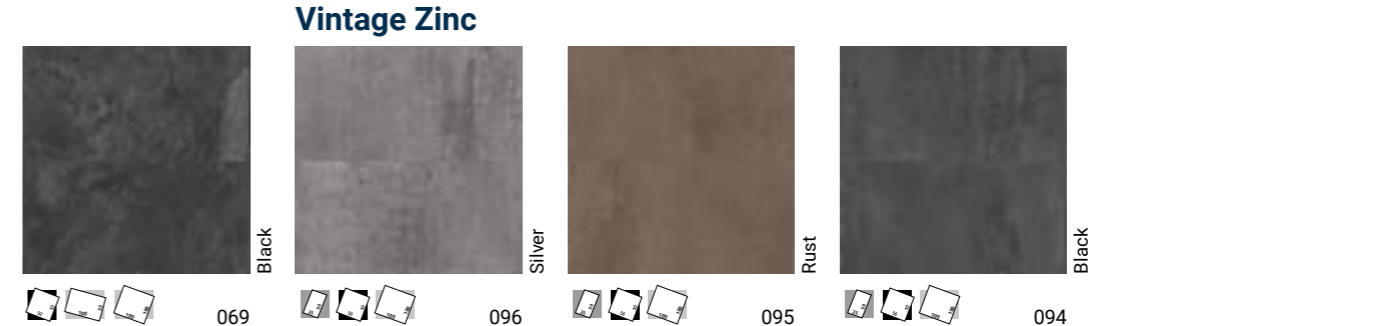

Vintage Zinc

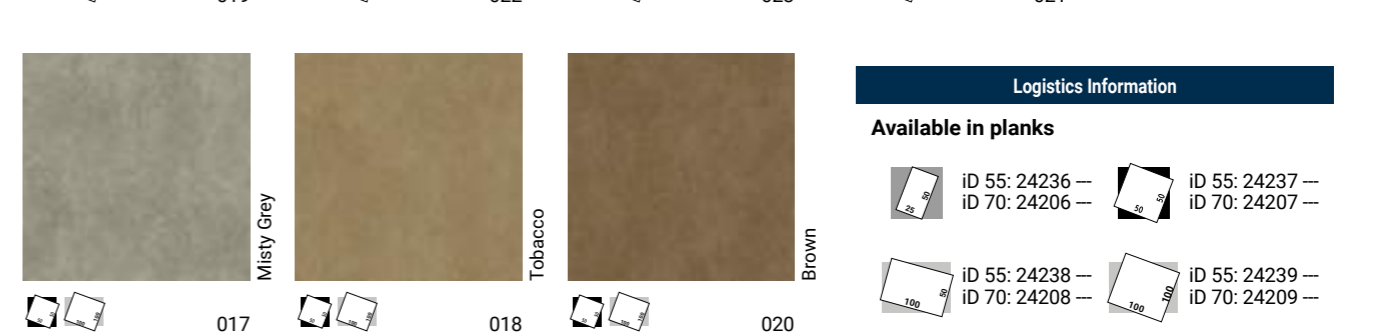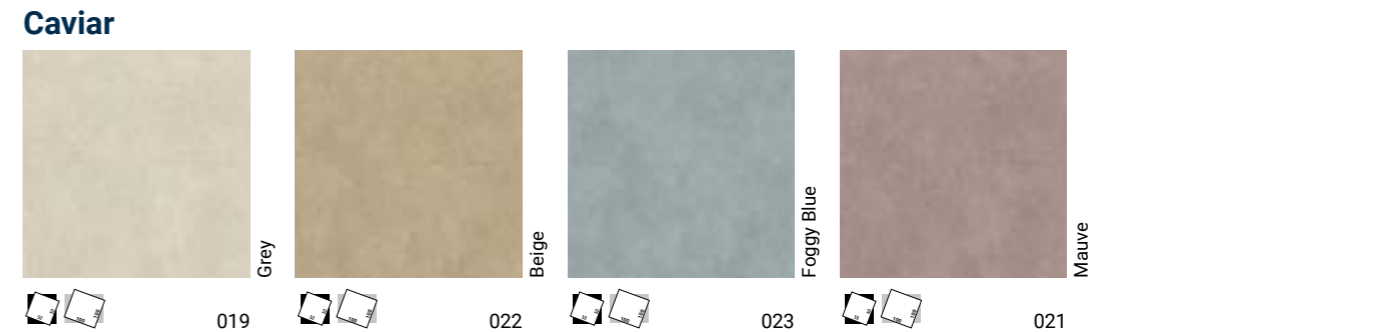


Logistics Information

- Available in planks
- iD 55: 24236 -- iD 55: 24237 --
 iD 70: 24206 -- iD 70: 24207 --
 - iD 55: 24238 -- iD 55: 24239 --
 iD 70: 24208 -- iD 70: 24209 --


◆ Available also in iD Inspiration Click

iD INSPIRATION 55 & HIGH TRAFFIC 70


Metal Frame

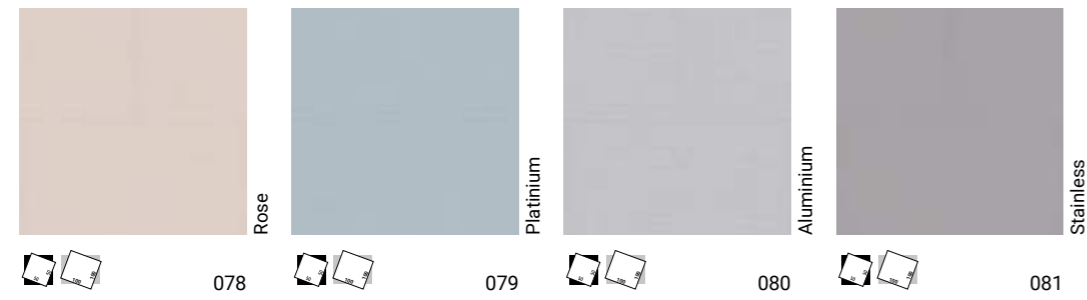

Twine

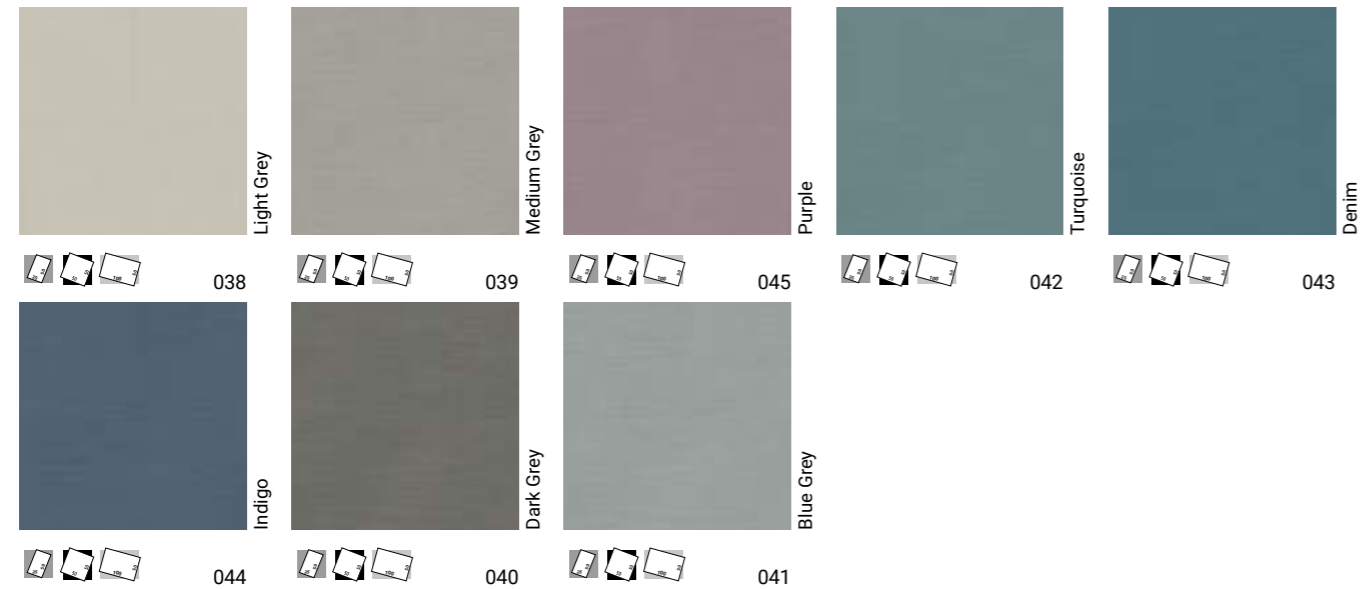


Tisse

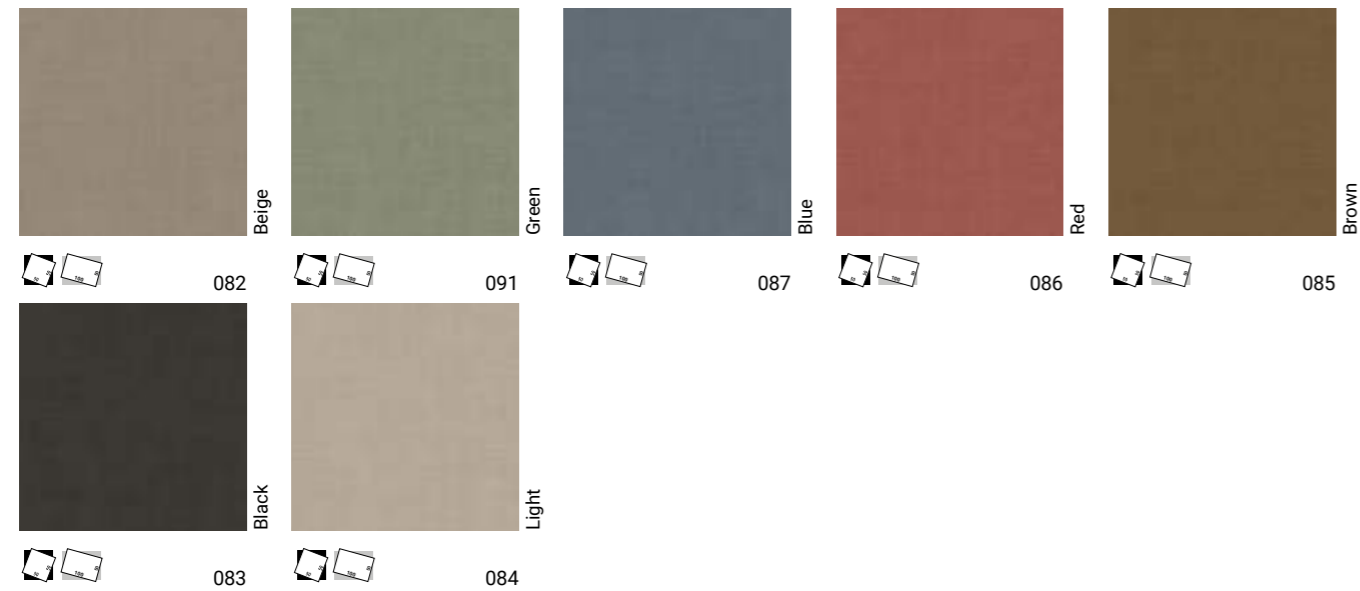

Logistics Information

Available in planks

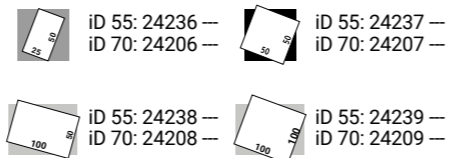

Page 474

Coordinated accessories offer



Twine - Light Grey, Medium Grey, Dark Grey, Blue Grey, Turquoise, Denim, Indigo

iD INSPIRATION 55^{PLUS} & HIGH TRAFFIC 70^{PLUS}




Alpine Oak




Lime Oak




Legacy Pine

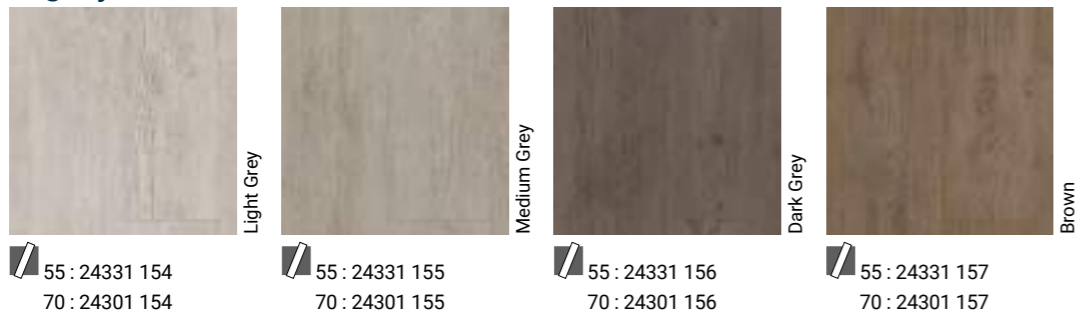


Rough Concrete

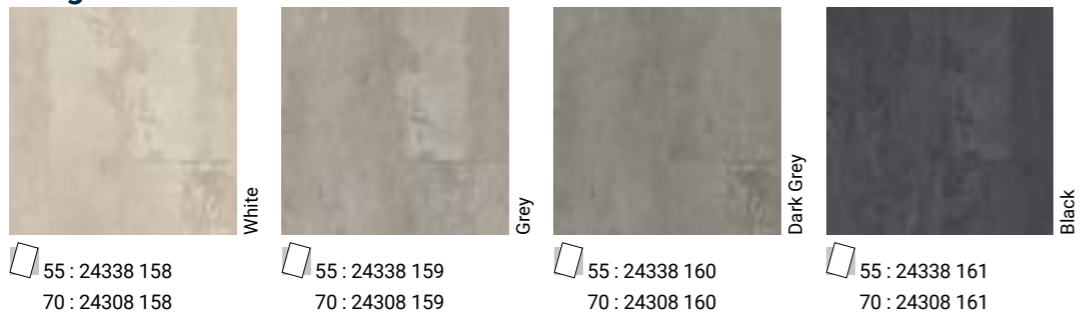

Logistics Information



Available in tiles

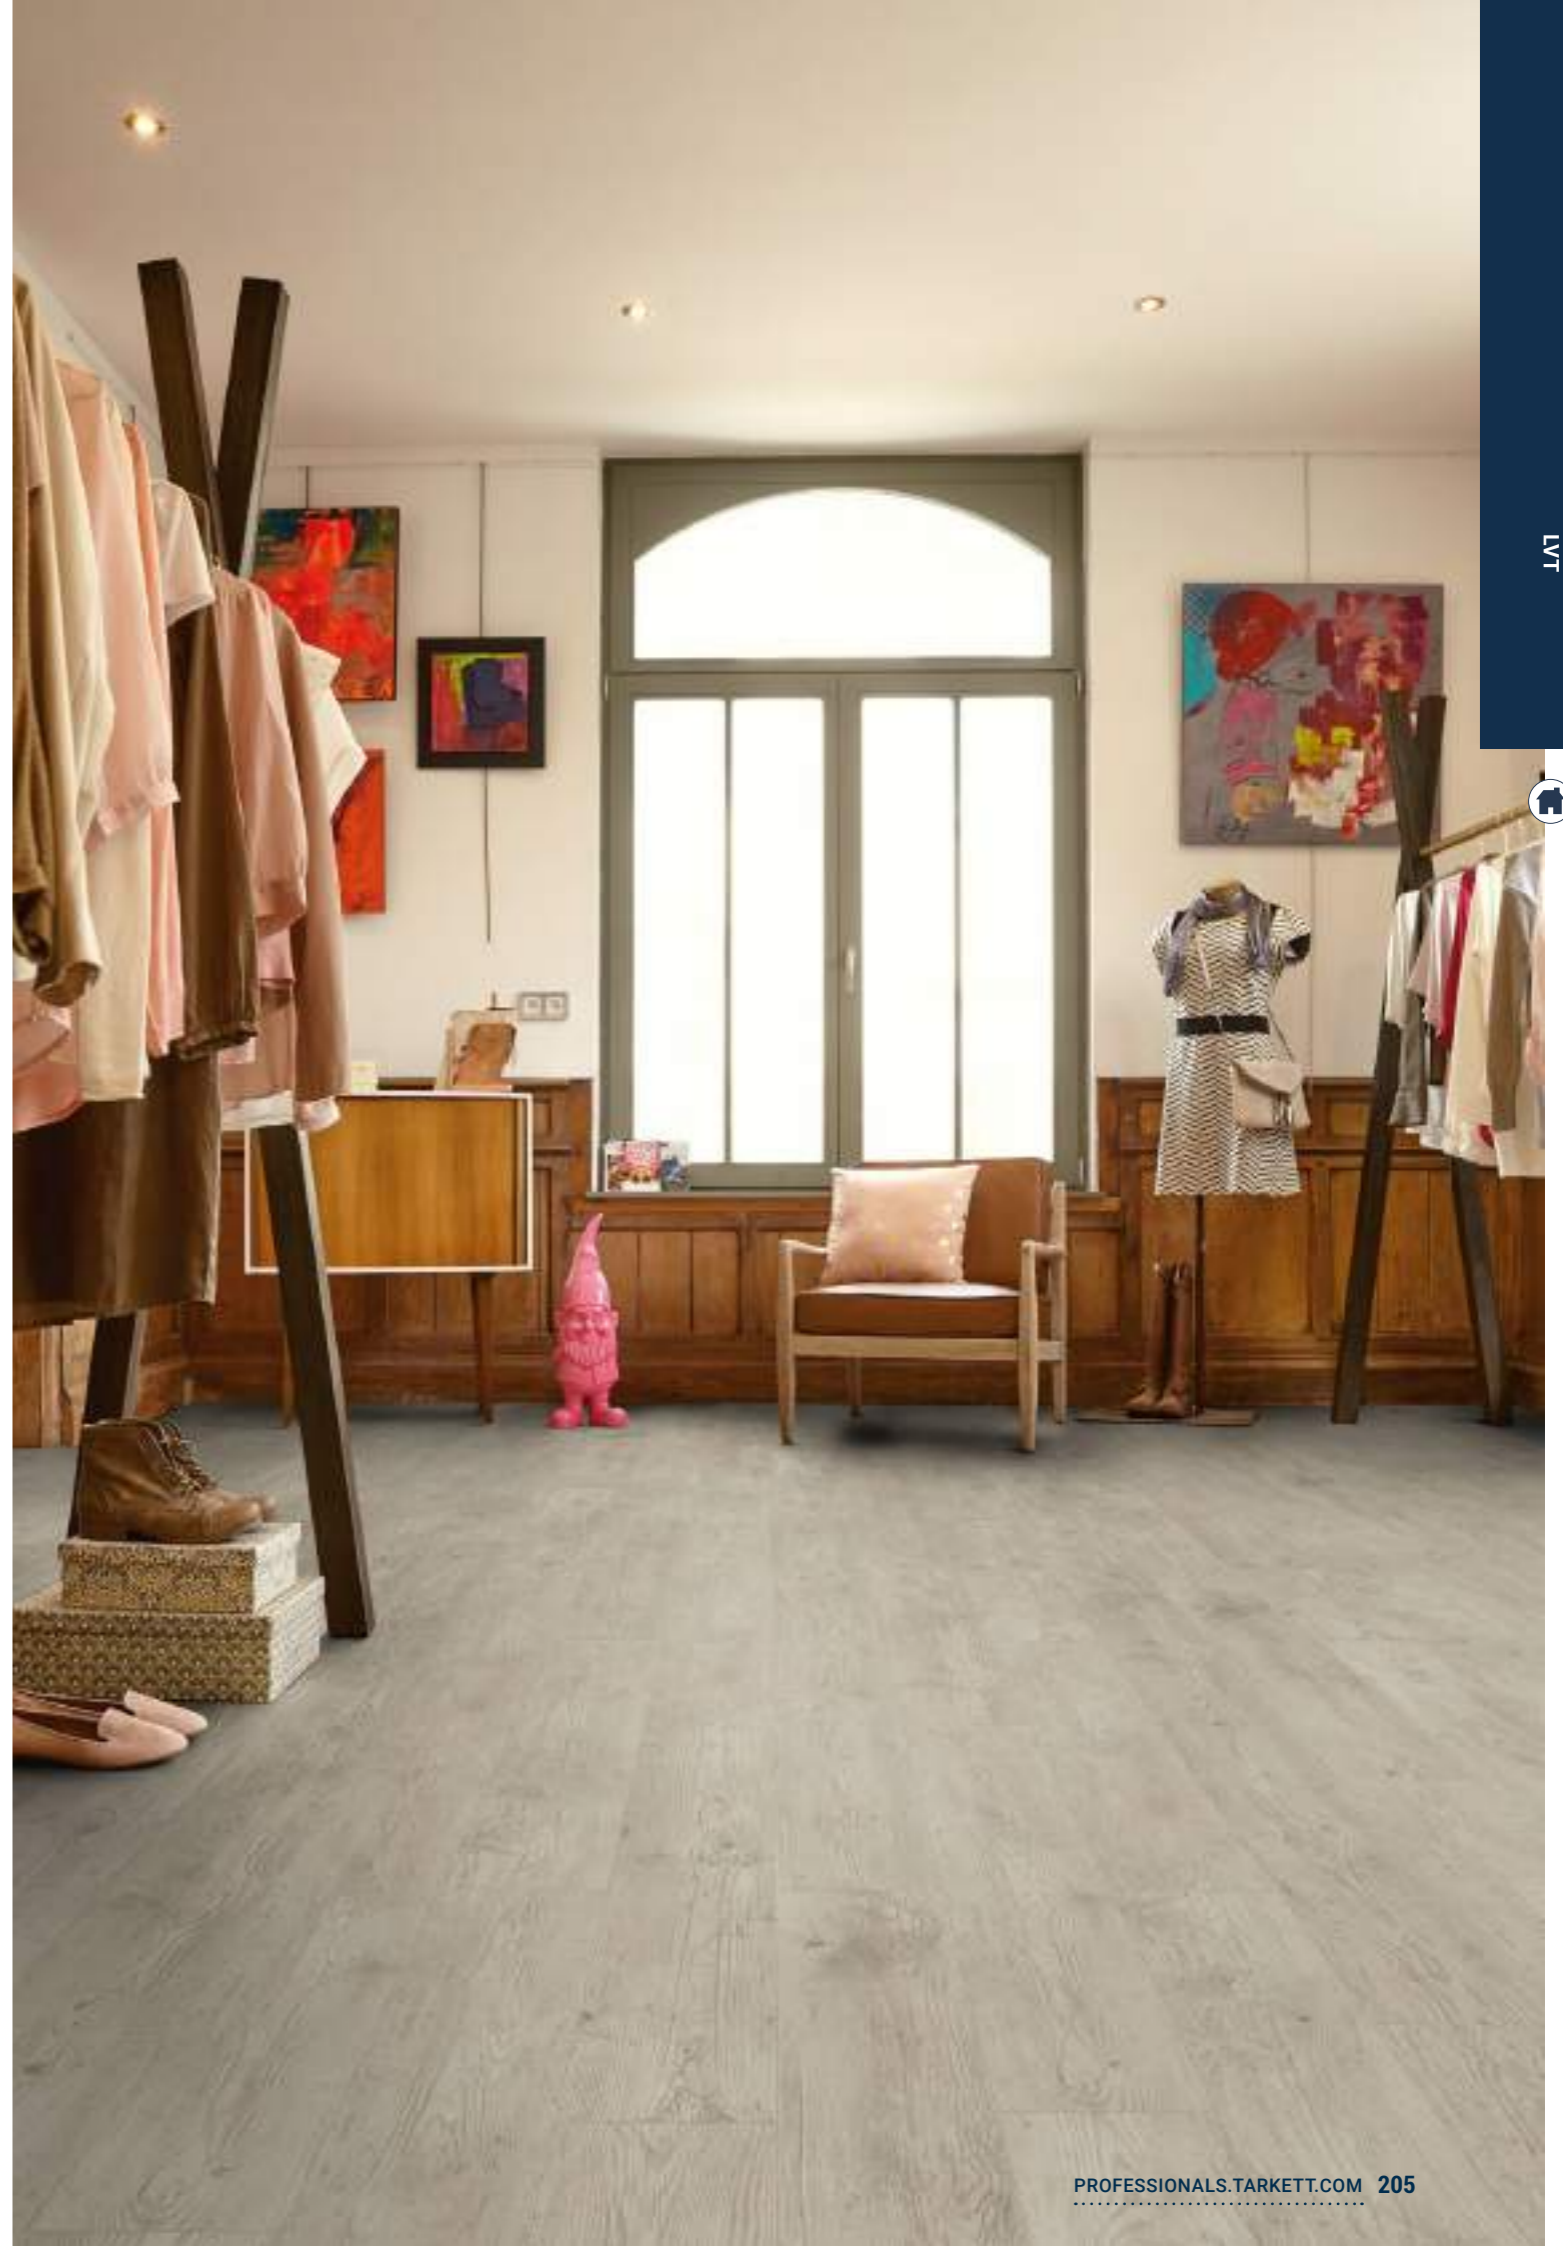














iD INSPIRATION 40

FITTING ROOM

- Very resistant product with 0.40mm transparent wear-layer
- TopClean XP™ surface protection for great resistance and easy cleaning
- Made in Germany
- VOC emissions below quantifiable level (< 10µg/m³)

TECHNICAL DATA

	Standards	iD Inspiration 40
Certification & Classification		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42
Technical Characteristics		
Total thickness	EN ISO 24346	2,5 mm
Wear layer thickness	EN ISO 24340	0,55
Total weight	EN ISO 23997	3850 g/m²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342	Planks 16,66 x 100 cm, 22 planks/box = 3,67 m² 12,5 x 122 cm, 24 planks/box = 3,66 m² 20 x 122 cm, 15 planks/box = 3,66 m² 25 x 122 cm, 12 planks/box = 3,66 m² 25 x 150 cm, 10 planks/box = 3,75 m² Tiles 25 x 50 cm, 30 tiles/box = 3,75 m² 50 x 50 cm, 15 tiles/box = 3,75 m² 50 x 100 cm, 7 tiles/box = 3,50 m² 100 x 100 cm
Surface treatment (PUR)	-	Yes - TopCleanXP™
Bevelled edges	-	Yes
Embossing in Register	-	Yes
Technical Performance		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	Bfl-s1 glued over concrete substrate Bfl-s1 glued over wood substrate
Residual indentation	EN ISO 24343-1	≤ 0,05 mm
Furniture leg	EN 424	No damage
Castor chair	EN ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 2 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (Ln,e,w < 85 dB)
Thermal resistance	EN ISO 10456	0,02 m² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Very good
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating	-	Suitable - max. 27 °C
Warranties		
Commercial warranty	-	10 years
CE Marking		
DoP number	-	0004-0038-DOP-2016-09

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
 	Available in planks   16,66 x 100cm 20 x 122cm Available in tiles  	 	    



iD INSPIRATION 40

White Oak - Light, Grey

Page 474
Coordinated accessories offer




LVT

Antik Oak




English Oak

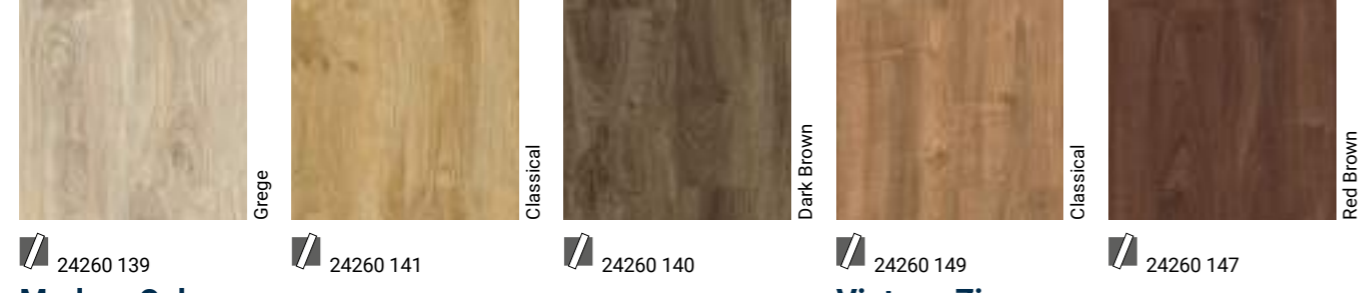

Modern Oak




Rustic Oak

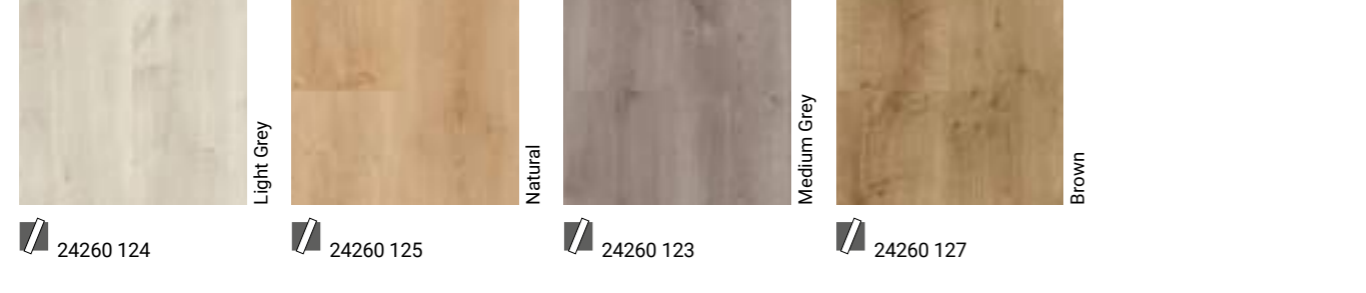


Polished Concrete




White Oak

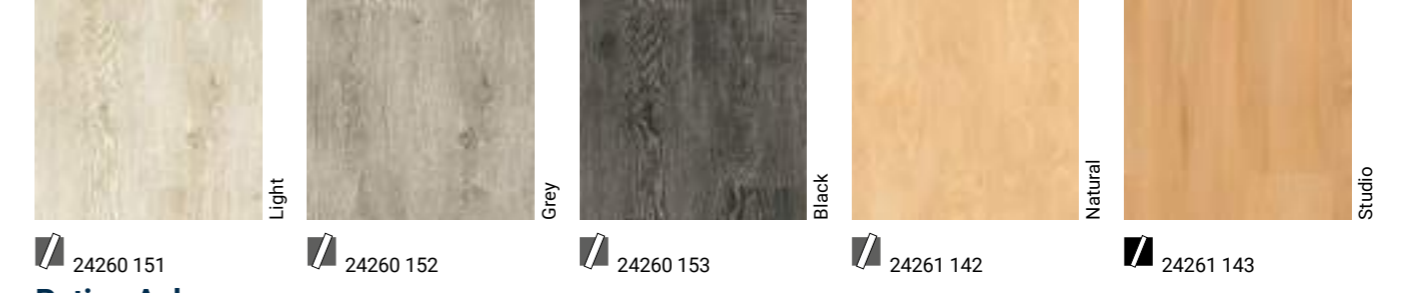

Patina Ash

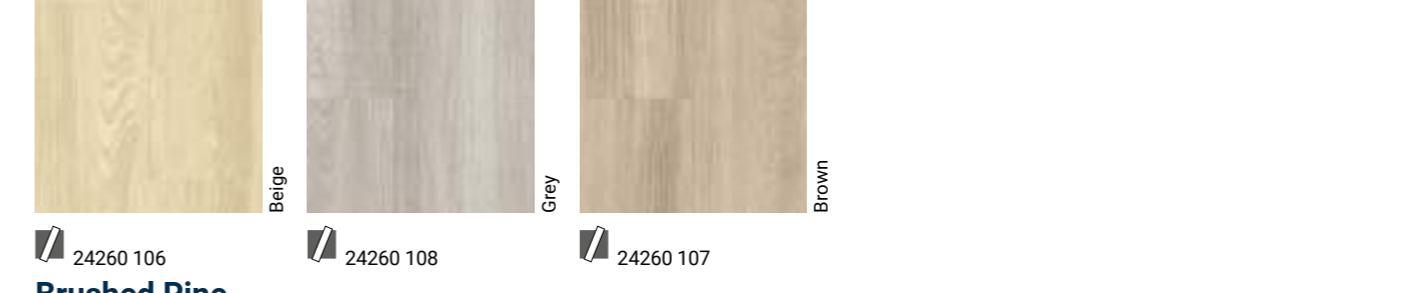


Brushed Pine

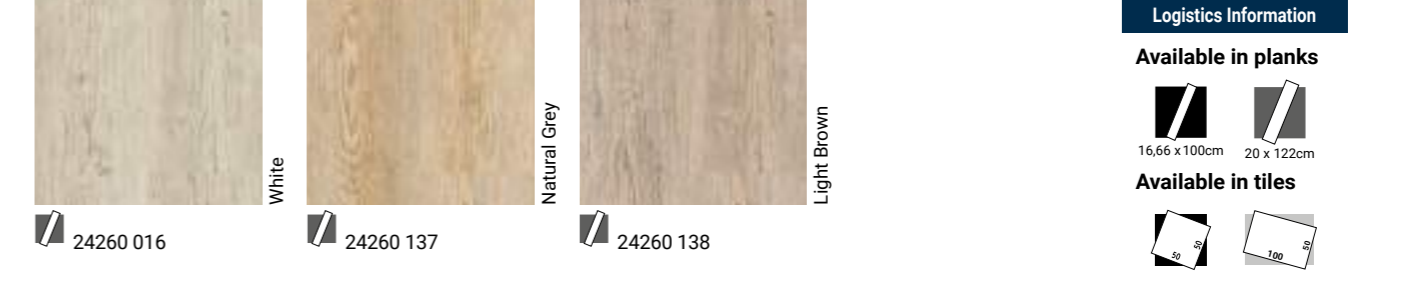

Logistics Information

Available in planks



Available in tiles





Durable, waterproof, simple to maintain and with versatile designs worthy of the most demanding brands and customers, Tarkett design-rich solution leverages Tarkett more than 130 years of flooring and innovation experience and provides the very best in flooring today.

SENSORIAL BENEFITS

- 57 wood and stone designs, coming from iD Inspiration Click, iD Click Ultimate and using our embossing in register technology.
- High-end commercial designs inspired by the most trendy environment, crafted in our Design Center in Europe
- Wide variety of premium accessories including skirtings to match every design

FUNCTIONAL BENEFITS

- Fold-down click system: 30% quicker to install than glue-down products
- Great dimensional stability
- No wax, no polish for life with TopClean XP™
- Enhanced acoustic performance when installed with Tarfomfort Pro or Tarkomfort Premium underlayers
- Patented 0,70 iD Inspiration Click construction to support high traffic

ENVIRONMENTAL BENEFITS

- 100% recyclable
- 100% phthalate-free
- Low VOC
- Made in European Union

INTRODUCING RIGID COMPOSITE CORE(RCC) TECHNOLOGY

- Extra density RCC technology (wear-proof, stain-proof, heat-proof, waterproof):
 - Ultimate resistance (perfect solution for heavy traffic and heavy loads up to 800 kg)
 - Ultimate acoustic comfort (19dB acoustic absorption)
 - Ultimate installation (covering 400sqm without expansion gap)
 - Ultimate design (Embossing In Register / High definition printing)
- Innovative new I4F triple lock and click system

TECHNICAL OVERVIEW


	Standards	iD Click Ultimate 70	iD Inspiration Click High Traffic 70	iD Inspiration Click 55
Certification & Classification				
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering		
Classification	EN ISO 10874	Domestic: 23 Commercial: 34 Industrial: 43	Commercial: 34 Industrial: 43	Domestic: 23 Commercial: 33 Industrial: 42
Technical Characteristics				
Total thickness	EN ISO 24346	6,50 mm	5.0 mm	4,5 mm
Wear layer thickness	EN ISO 24340	0,70 mm	0,7 mm	0.55 mm
Total weight	EN ISO 23997	11,3 kg/m ²	8350 g/m ²	8000 g/m ²
Wear layer binder content	EN ISO 10582	Type I	Type I	Type I
Dimensions	EN ISO 24342	Planks 176 x 1213 cm, 6 planks/box = 1,28 m ² Tiles 300 x 600 cm, 7 tiles/box = 1,26 m ²	Planks 19,05 x 121,10 cm, 7 planks/box = 1,61 m ² 24,05 x 149,10 cm, 5 planks/box = 1,79 m ² Tiles 32,38 x 60,10 cm, 9 tiles/box = 1,75 m ² 49,05x99,1 cm, 3 tiles/box= 1,46 m ²	Planks 19,05 x 121,10 cm, 7 planks/box = 1,61 m ² 24,05 x 149,10 cm, 5 planks/box = 1,79 m ² Tiles 32,38 x 60,10 cm, 9 tiles/box = 1,75 m ² 49,05x99,1 cm, 3 tiles/box= 1,46 m ²
Surface treatment (PUR)	-	Yes - PUR Ultimate	Yes - TopCleanXP™	Yes - TopCleanXP™
Bevelled edges	-	Yes	Yes	Yes
Embossing in Register	-	Yes on PLUS references	Yes on PLUS references	
Technical Performance				
Dimensional stability	EN ISO 23999	≤ 0.15%	≤ 0.15%	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 1 mm	≤ 2 mm	≤ 2 mm
Reaction to fire	EN 13501-1	B _n -s1	B _n -s1 loose laid over concrete substrate	B _n -s1 loose laid over concrete substrate
Residual indentation	EN ISO 24343-1	≤ 0,05 mm	≤ 0,10 mm	≤ 0,10 mm
Furniture leg	EN 424	No damage	No damage	No damage
Castor chair	EN ISO 4918 - EN 425	No damage	No damage	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 19 dB	ΔLw = 5 dB	ΔLw = 3 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,ew} < 85 dB)	Class C (L _{n,ew} < 85 dB)	Class C (L _{n,ew} < 85 dB)
Thermal resistance	EN ISO 10456	0,05 m ² K/W	0,04 m ² K/W	0,04 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Very Good	Very good	Very good
Slip resistance	DIN 51130 EN 13893	R9/R10 Depending on embossing μ ≥ 0,30	R9 / R10 depending on embossing μ ≥ 0,30	R9 / R10 depending on embossing μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	≤ 2 kV	<2 kV on concrete > 10 ⁹ Ohm	<2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm	≥ 50N / 50mm	≥ 50N / 50mm
Underfloor heating	-	Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max. 27 °C
Environmental Tag				
VOC emission	ISO 16000-9	≤ 100μg/m ³	≤ 10μg/m ³	≤ 10μg/m ³
Recycled content	-		24%	24%
Recyclable	-	100%	100%	100%
Plasticizer	-	Phthalate-free	Phthalate-free	Phthalate-free
Warranties				
Commercial warranty	-	10 years		
CE Marking				
DoP number	-	0132-0070-DoP-2018-01	0197-0051-DOP-2018-10	0197-0011-DOP-2017-11

iD CLICK ULTIMATE 70

- Ultimate robustness to indentation shocks, scratch & scuff thanks to new RCC technology
- Ultimate installation minimising business close up:
 - 100 sqm installed in 8 hours thanks to quick and easy installation I4F new click system
 - Install over subfloors including ceramic tiles without preparation
 - Install longer areas without transition gap thanks to exceptional dimensional stability (400 m²)
- Ultimate design with 15 modern and stylish wood & stone designs

iD CLICK ULTIMATE 70

- The Ultimate PUR surface treatment** is a photo-reticulated coating that is exceptionally resistant to abrasion and scratches.
- A high definition decorative layer** includes lifelike embossing in register on most references.
- Rigid Composite Core (RCC) technology** provides extreme dimensional resistance and stability, ensuring reliably durable performance.
- The acoustic backing with Soundblock technology** absorbs 19dB.
- Installation is fast and easy** thanks to new I4F Click technology. Simply drop, lock and click into place.

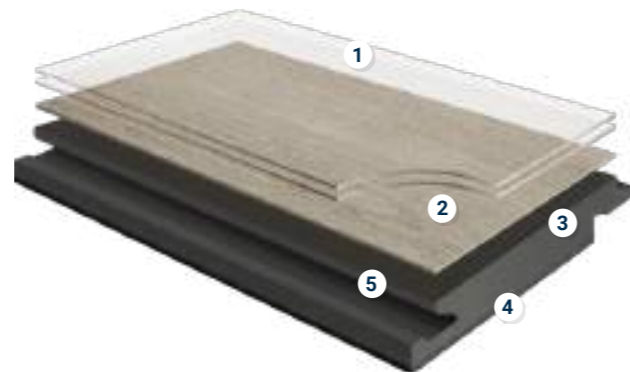

TECHNICAL DATA

	Standards	iD Click Ultimate 70
Certification & Classification		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	Domestic: 23 Commercial: 34 Industrial: 43
Technical Characteristics		
Total thickness	EN ISO 24346	6,50 mm
Wear layer thickness	EN ISO 24340	0,70 mm
Total weight	EN ISO 23997	11,3 kg/m ²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342	Planks 176 x 1213 cm, 6 planks/box = 1,28 m ² Tiles 300 x 600 cm, 7 tiles/box = 1,26 m ²
Surface treatment (PUR)	-	Yes - PUR Ultimate
Bevelled edges	-	Yes
Embossing in Register	-	Yes on PLUS references
Technical Performance		
Dimensional stability	EN ISO 23999	≤ 0.15%
Curl resultant to heat	EN ISO 23999	≤ 1 mm
Reaction to fire	EN 13501-1	B _f -s1
Residual indentation	EN ISO 24343-1	≤ 0,05 mm
Furniture leg	EN 424	No damage
Castor chair	EN ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w 19 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{re,w} < 85 dB)
Thermal resistance	EN ISO 10456	0,05 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Very Good
Slip resistance	DIN 51130 EN 13893	R9/R10 Depending on embossing μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	≤ 2 kV
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating	-	Suitable - max. 27 °C
Warranties		
Commercial warranty	-	10 years
CE Marking		
DoP number	-	0132-0070-DoP-2018-01

Click System	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
Produced under license from I4F https://i4f-patents.com	The embossing in register technology is used to create a precise texture that enhances the wood design.	Available in planks 17,6 x 121,3 cm Available in tiles 30 x 60 cm		

iD CLICK ULTIMATE 70

Light Oak



Soft Ash


Stylish Oak



Riviera Oak



Timeless Concrete

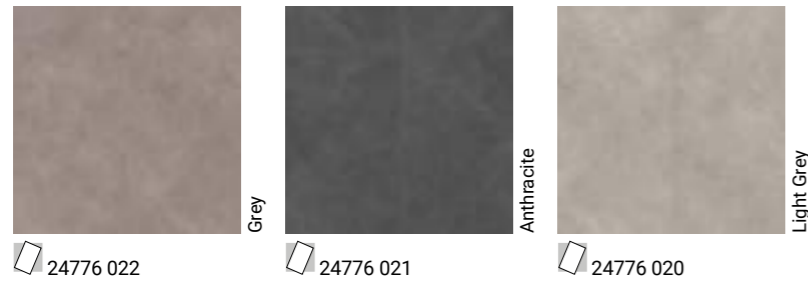

Logistics Information

Available in planks




17,6 x 121,3 cm

Available in tiles



30 x 60 cm

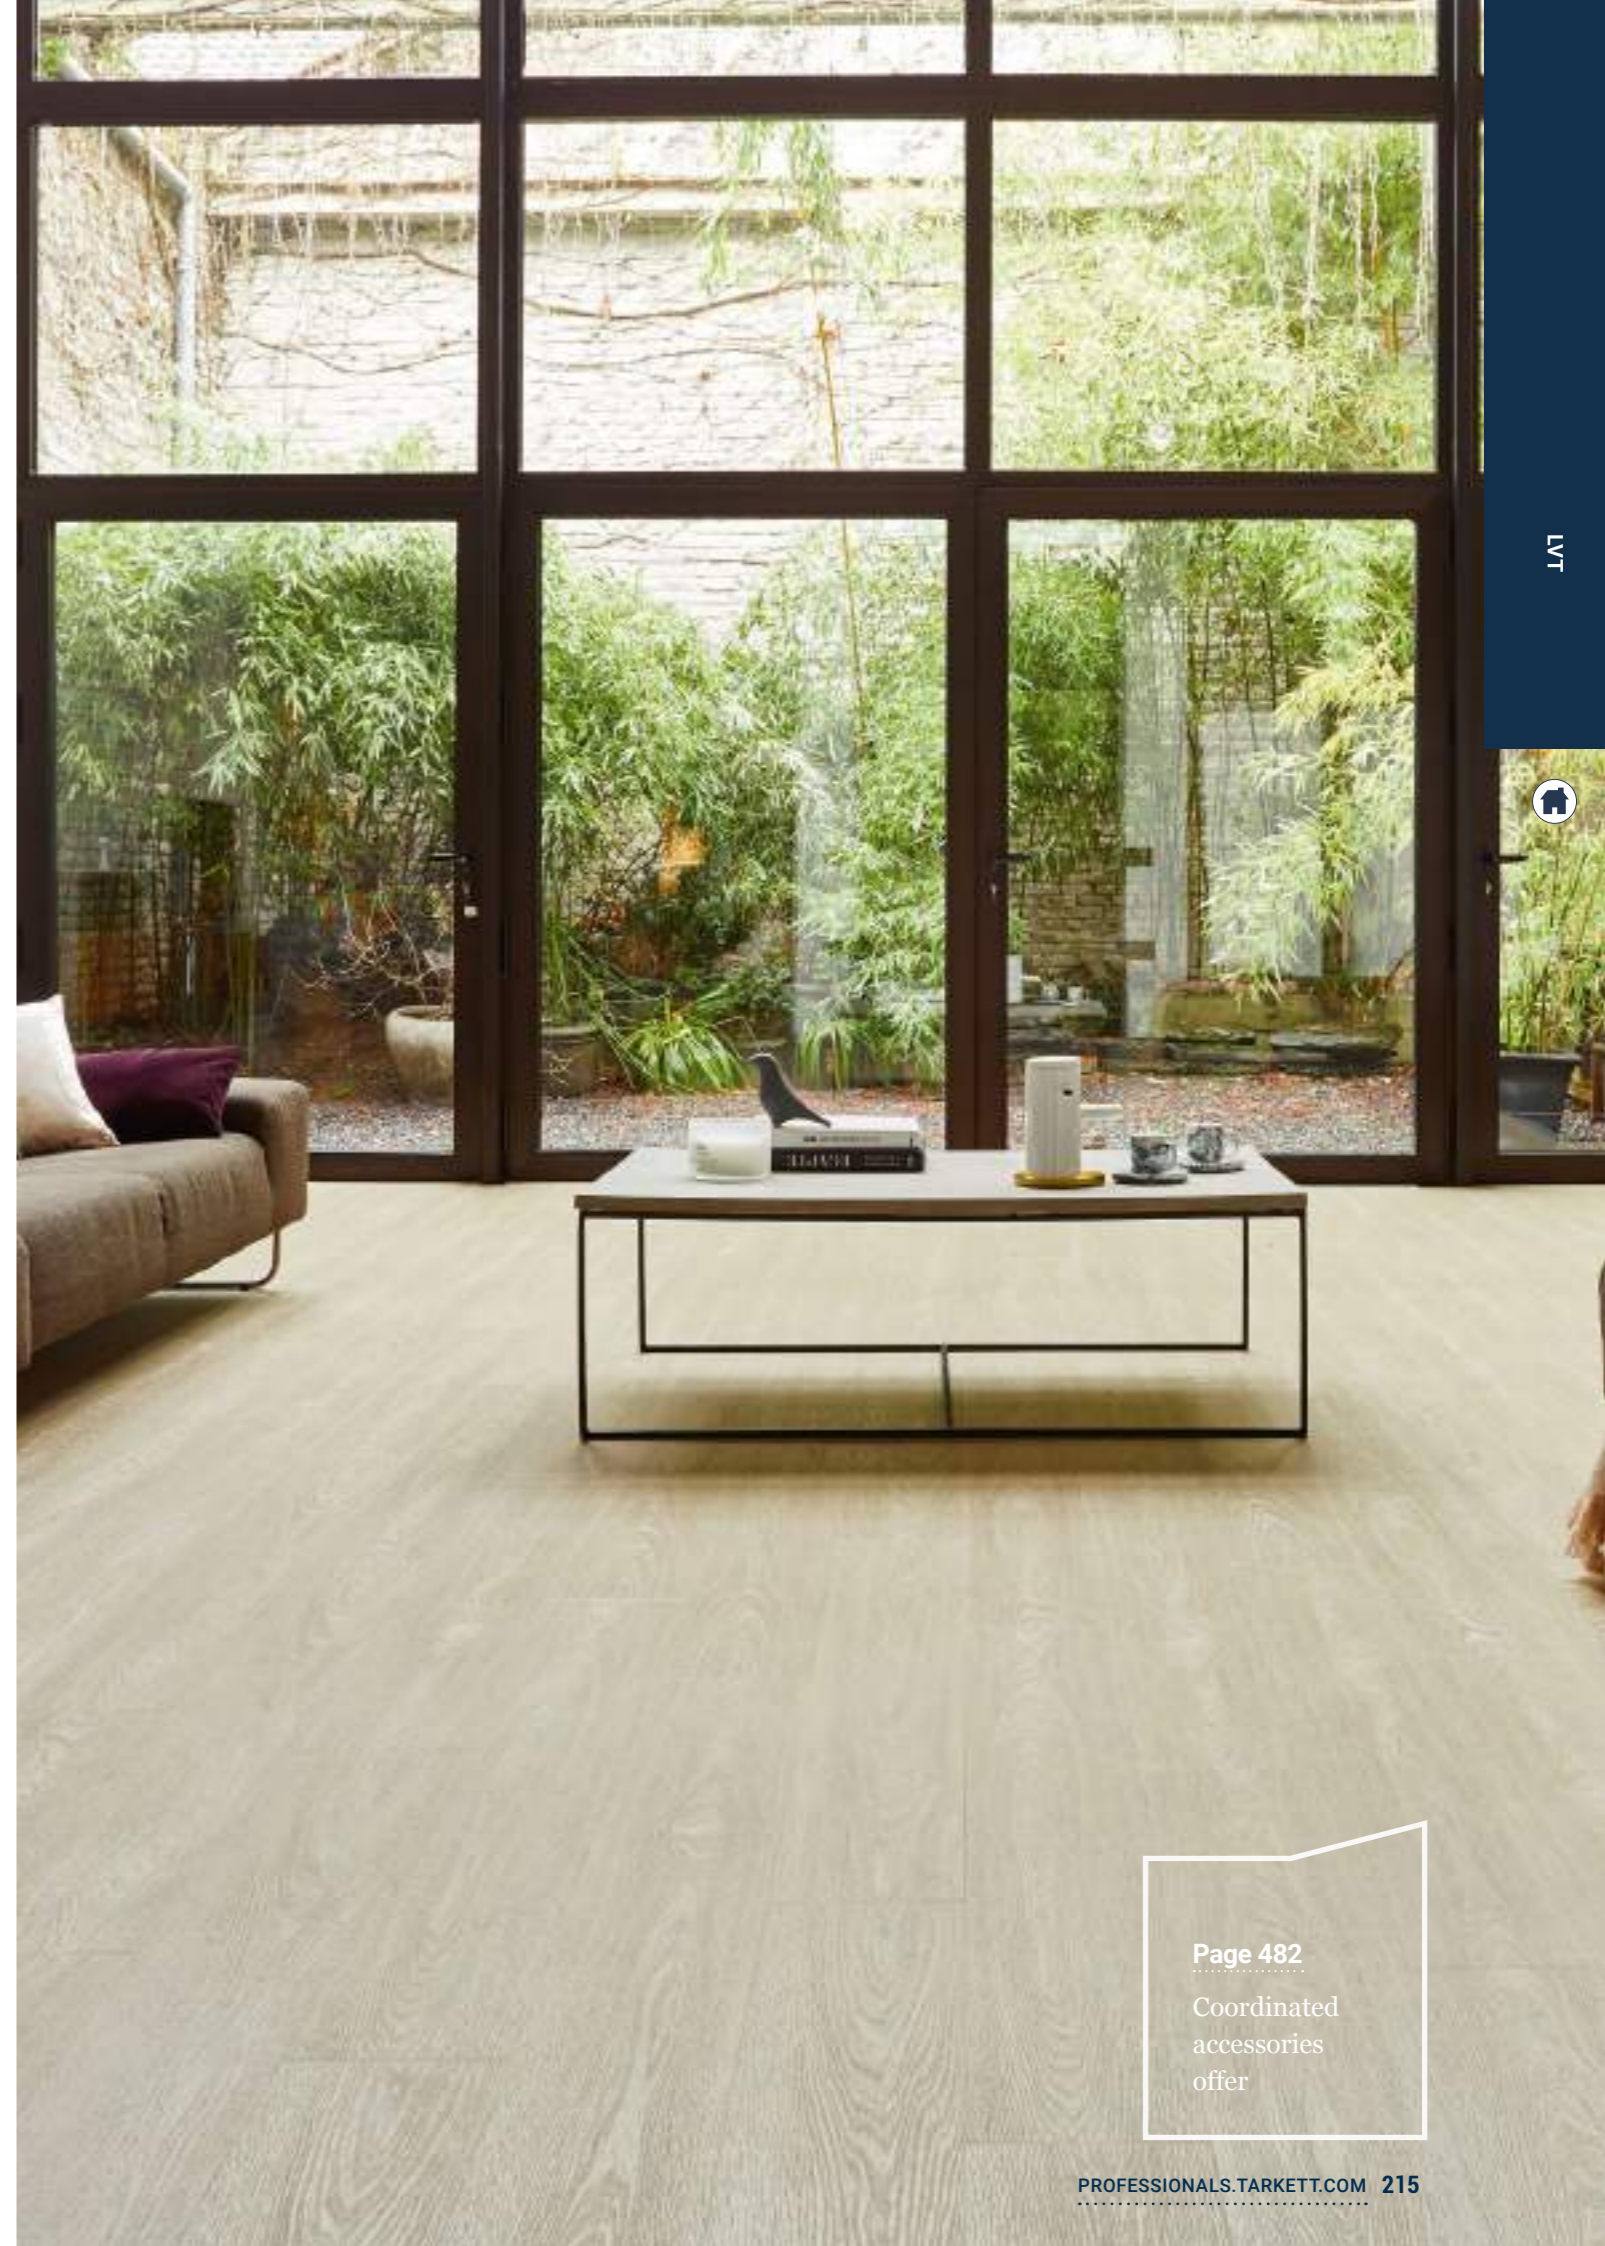

Page 482

Coordinated accessories offer

iD INSPIRATION CLICK 55 & HIGH TRAFFIC 70 **NEW**

- Plus Effect: Embossing In Register (EIR) technology for a look and feel close to the real thing
- Ideal for the renovation of commercial areas
- Fast, easy and economical
- Highly resistant product
- Perfect matching LVT skirtings available in 20 colours



iD INSPIRATION CLICK 55 / iD INSPIRATION CLICK HIGH TRAFFIC 70

- 1 Surface embossing for a more natural look**
- 2 TopClean XP™ PUR reinforcement for extreme resistance and easy, low-cost maintenance**
- 3 0.55mm (for iD Inspiration Click 55) and 0.70mm (for iD inspiration Click high traffic 70) pure PVC transparent wear layer for a hard wearing, indentation-resistant surface compatible with - 0.55mm : class 33 (heavy commercial) and 42 (general industrial) use - 0.70mm : class 34 (heavy commercial) and 43 (general industrial) use**
- 4 42 design options in high-definition printing**
- 5 Core layer with double glass-fibre reinforcement (for iD Inspiration Click 55) and Core layer with a patented reinforced construction (for iD inspiration Click high traffic 70) to support high traffic**
- 6 Stabilising layer for a curl-free product**
- 7 Fold-down Click System**

TECHNICAL DATA

	Standards	iD Inspiration Click High Traffic 70	iD Inspiration Click 55
Certification & Classification			
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	Commercial: 34 Industrial: 43	Domestic: 23 Commercial: 33 Industrial: 42
Technical Characteristics			
Total thickness	EN ISO 24346	5.0 mm	4,5 mm
Wear layer thickness	EN ISO 24340	0,7 mm	0.55 mm
Total weight	EN ISO 23997	8350 g/m ²	8000 g/m ²
Wear layer binder content	EN ISO 10582	Type I	Type I
Dimensions	EN ISO 24342	Planks 19,05 x 121,10 cm, 7 planks/box = 1,61 m ² 24,05 x 149,10 cm, 5 planks/box = 1,79 m ² Tiles 32,38 x 60,10 cm, 9 tiles/box = 1,75 m ² 49,05x99,1 cm, 3 tiles/box= 1,46 m ²	Planks 19,05 x 121,10 cm, 7 planks/box = 1,61 m ² 24,05 x 149,10 cm, 5 planks/box = 1,79 m ² Tiles 32,38 x 60,10 cm, 9 tiles/box = 1,75 m ² 49,05x99,1 cm, 3 tiles/box= 1,46 m ²
Surface treatment (PUR)	-	Yes - TopCleanXP™	Yes - TopCleanXP™
Bevelled edges	-	Yes	Yes
Embossing in Register	-	Yes on PLUS references	
Technical Performance			
Dimensional stability	EN ISO 23999	≤ 0.15%	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm	≤ 2 mm
Reaction to fire	EN 13501-1	B _{fl} -s1 loose laid over concrete substrate	B _{fl} -s1 loose laid over concrete substrate
Residual indentation	EN ISO 24343-1	≤ 0,10 mm	≤ 0,10 mm
Furniture leg	EN 424	No damage	No damage
Castor chair	EN ISO 4918 - EN 425	No damage	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 5 dB	ΔLw = 3 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,w} < 85 dB)	Class C (L _{n,w} < 85 dB)
Thermal resistance	EN ISO 10456	0,04 m ² K/W	0,04 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Very good	Very good
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0,30	R9 / R10 depending on embossing μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm	<2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm	≥ 50N / 50mm
Underfloor heating	-	Suitable - max. 27 °C	Suitable - max. 27 °C
Warranties			
Commercial warranty	-		
CE Marking			
DoP number	-	0197-0051-DOP-2018-10	0197-0011-DOP-2017-11

Main Product Features	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	 The embossing in register technology is used to create a precise texture that enhances the wood design.	Available in planks 19,05 x 121,10cm 24,05 x 149,10cm Available in tiles 49,05 x 99,10cm 32,38 x 60,10 cm		




**iD INSPIRATION CLICK 55
& HIGH TRAFFIC 70**



**iD INSPIRATION CLICK 55
& HIGH TRAFFIC 70**

Rustic Oak

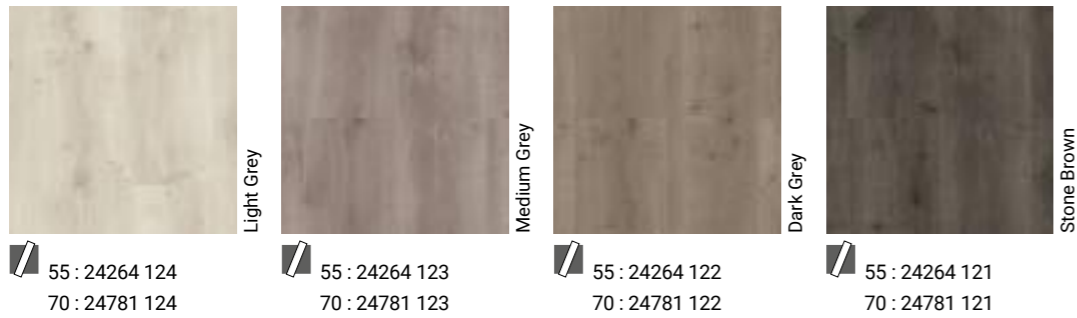


Contemporary Oak



ELM



Patina Ash

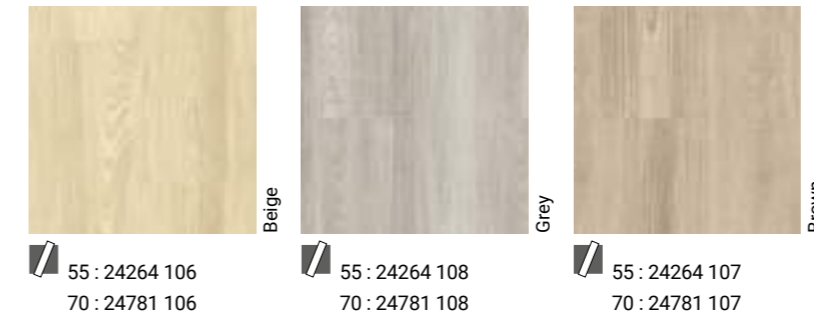

Terrazzo




Oxide




Logistics Information

Available in planks



Available in tiles



ID INSPIRATION 55^{PLUS} & HIGH TRAFFIC 70^{PLUS}




Alpine Oak




Lime Oak



Legacy Pine

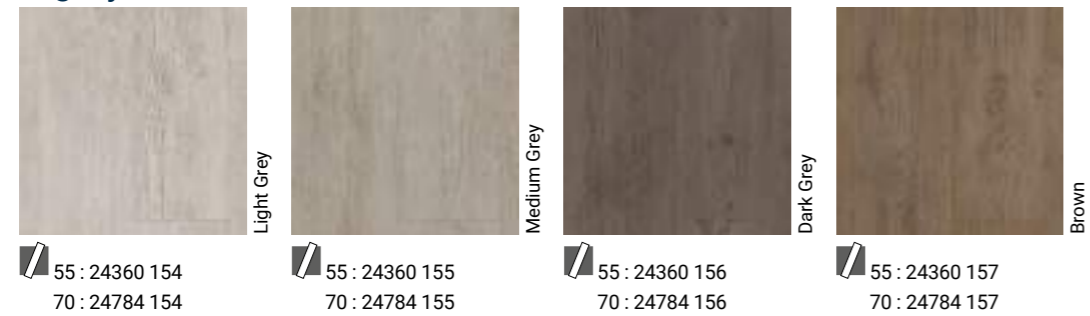

Rough Concrete


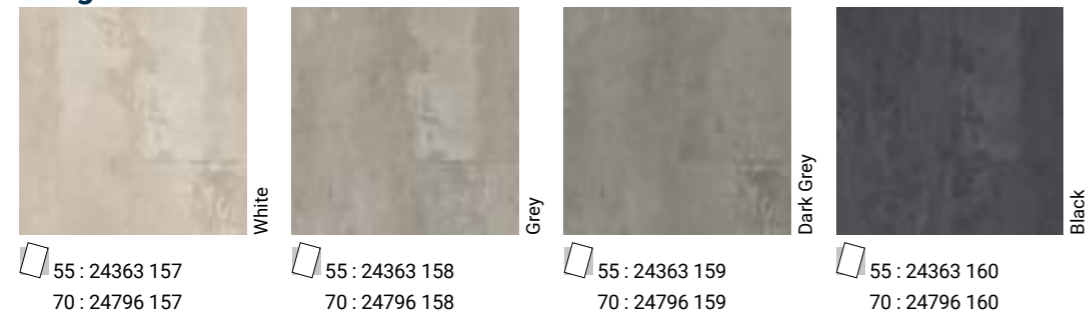


Logistics Information

Available in planks



Available in tiles

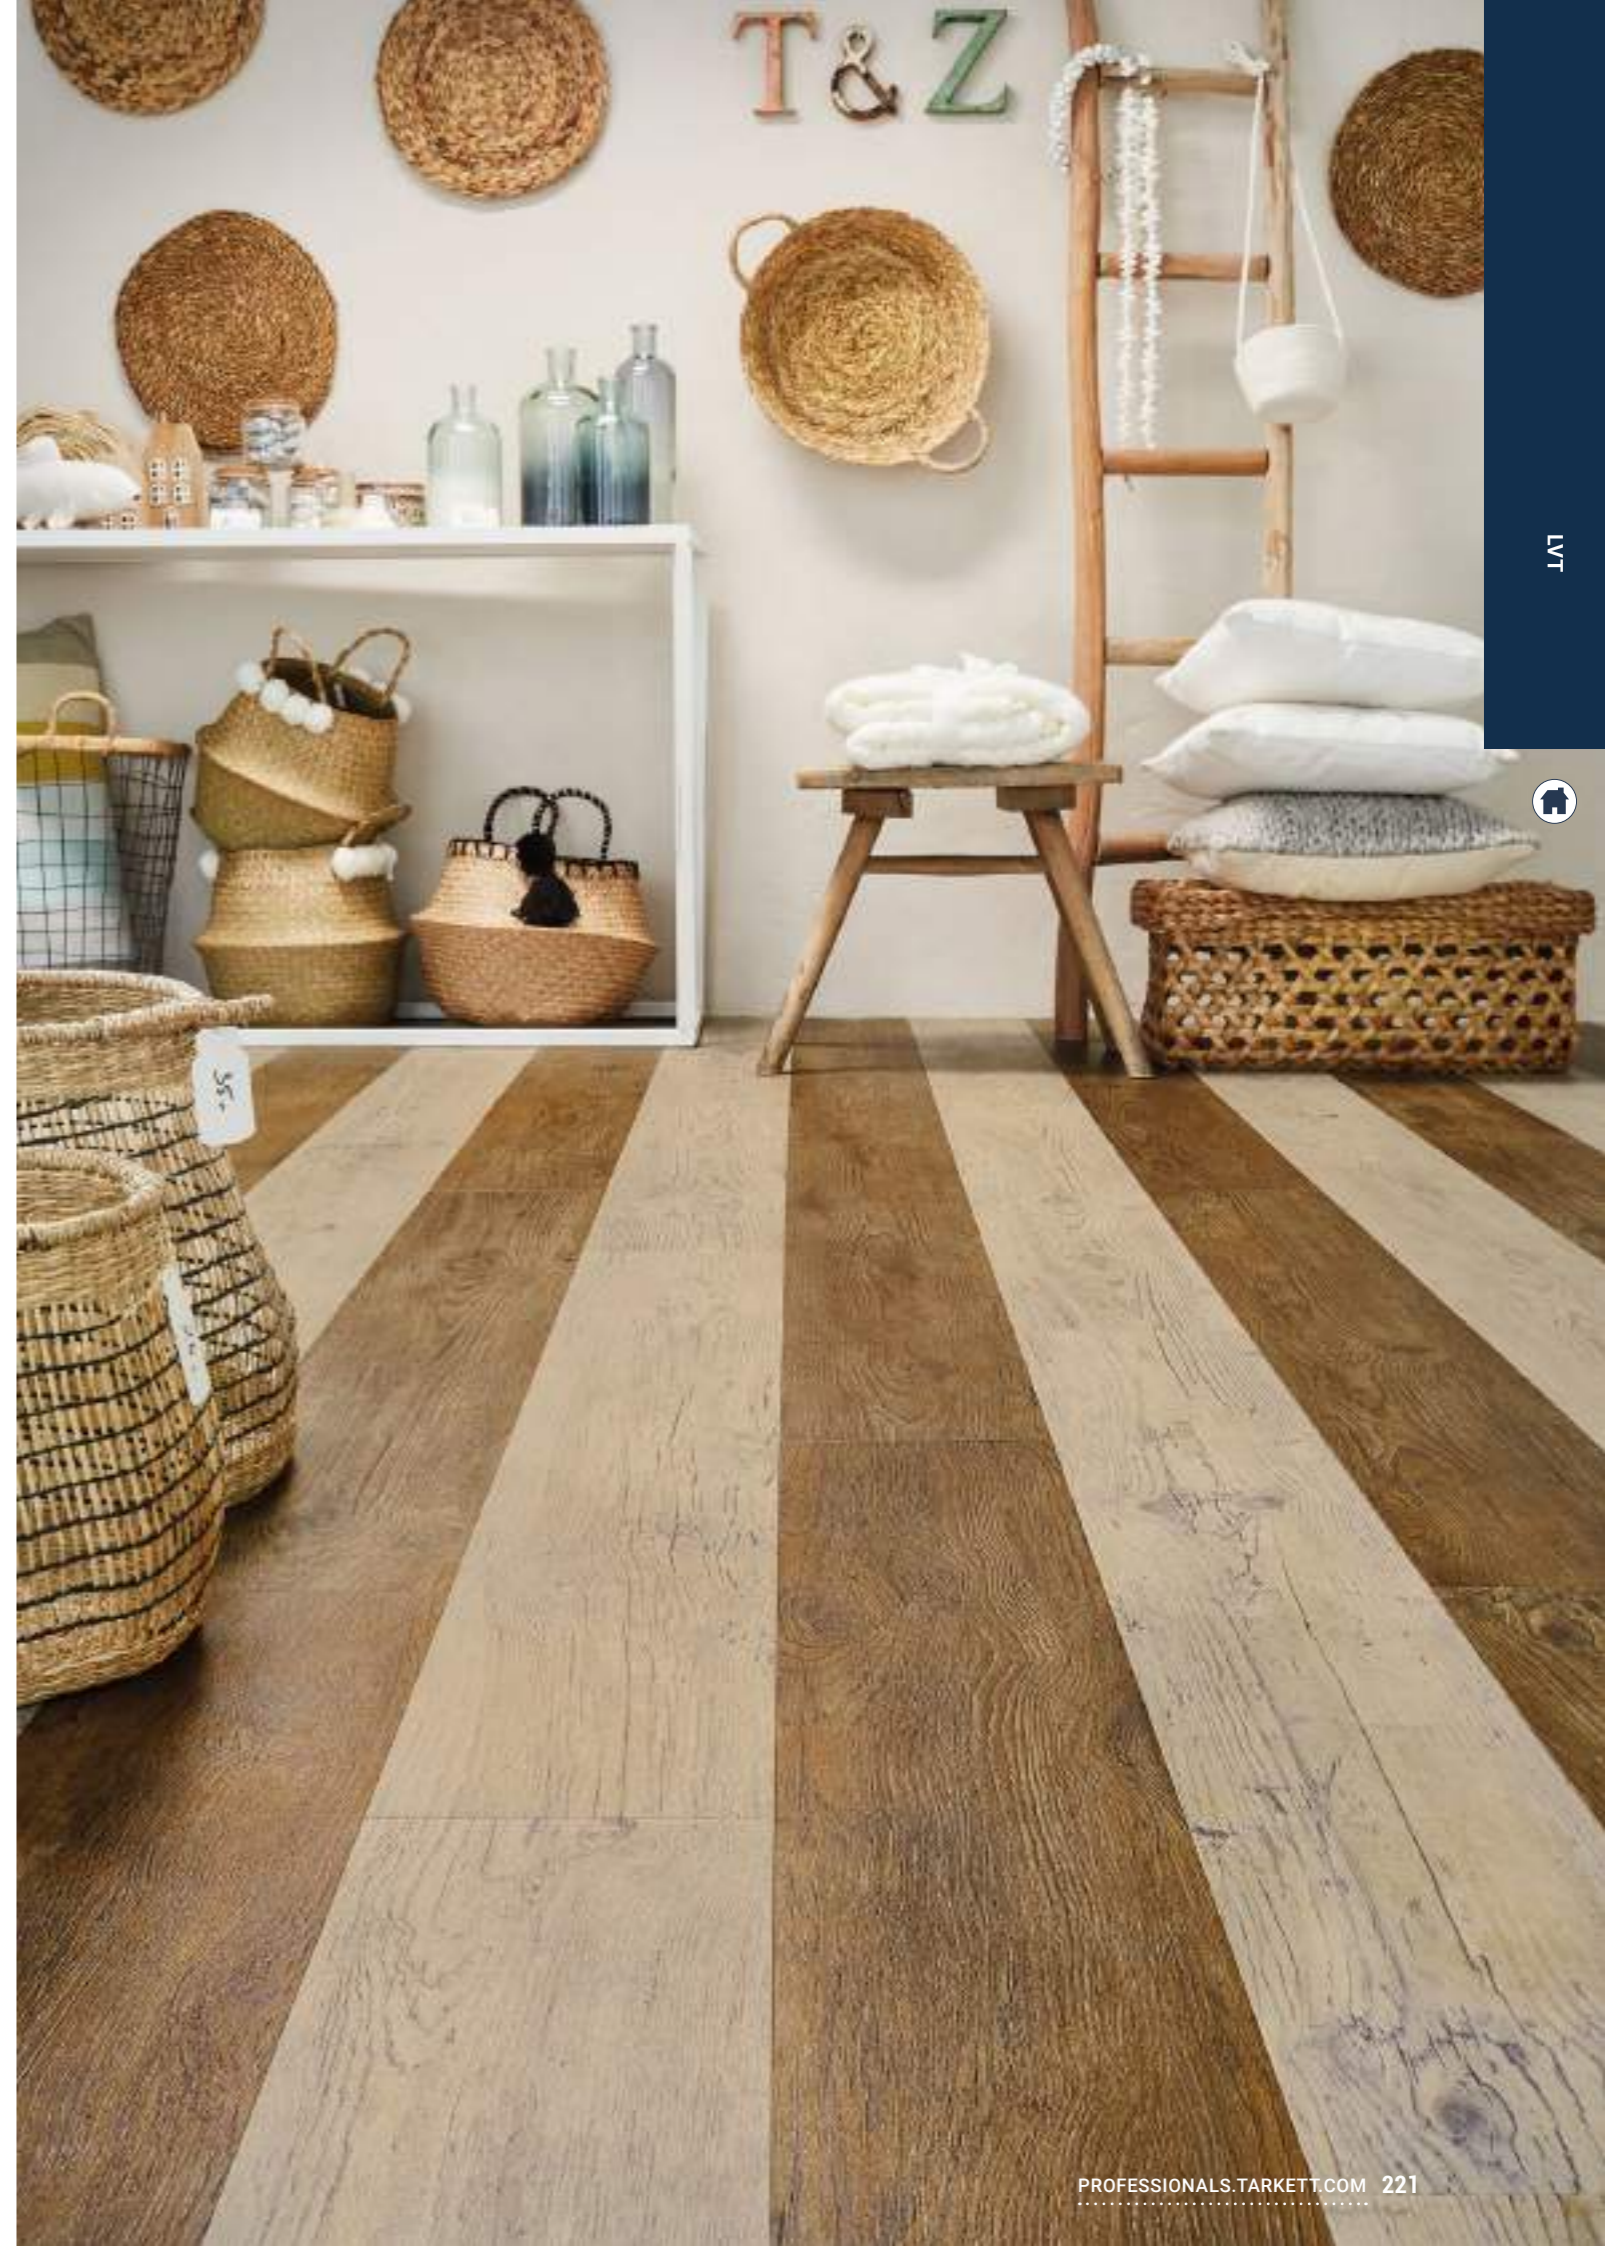



Eye-catching floors for high-traffic areas in offices, hospitality and retail

SENSORIAL BENEFITS

- Coordinated colours and patterns
- Enhances corporate image with a pleasant, productive environment

FUNCTIONAL BENEFITS

- Cost-effective installation
- Great dimensional stability
- Easy access to cables and pipes (raised floors)
- No wax, no polish for life with TopClean XP™!


ENVIRONMENTAL BENEFITS

- Low VOC emissions contribute to better indoor air quality
- Reduced carbon footprint
- Recyclable




iD INSPIRATION LOOSE-LAY

- 1 TopClean XP™ PUR reinforcement for extreme resistance and easy low-cost maintenance
- 2 Wear layer 0.55 mm for commercial traffic resistance
- 3 Printed film in 22 different wood and stone designs
- 4 Core layer for proper resistance to indentation
- 5 Glass fiber reinforcement for perfect dimensional stability
- 6 Bottom layer for a solid basis to the product
- 7 Balancing layer for a curl-free product
- 8 Tarkett exclusive herringbone anti-skid backing for exceptional adherence to the subfloor and skid resistance in all directions

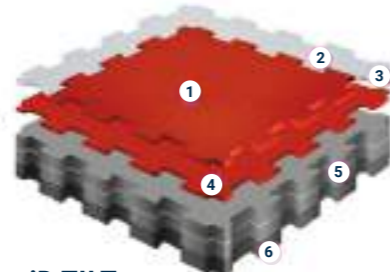

iD TILT

- 1 TopClean XP™ PUR reinforcement for extreme resistance and easy low-cost maintenance
- 2 Surface embossing for better non-slip properties
- 3 Pure PVC transparent wear layer: exceptionally hard-wearing and indentation resistant
- 4 Design film: 7 design options
- 5 Core layer with glass fiber reinforcement: excellent dimensional stability and resistance to tear and indentation
- 6 Balancing layer for a curl-free product backing

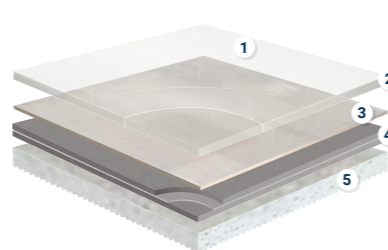

iD SQUARE

- 1 TopClean XP™ PUR reinforcement: extreme resistance and easy low-cost maintenance
- 2 0.80mm pure PVC transparent wear layer: resistance to wear
- 3 Decorated compact impregnation: 37 design options
- 4 Structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre: exceptional dimensional stability and excellent resistance to tear and indentation
- 5 Chemical foam backing: enhanced acoustic performance

TECHNICAL OVERVIEW

	Standards	iD Inspiration Loose-lay	iD TILT	iD Square
Certification & Classification				
Type of floor covering	EN ISO 10582:2010	Heterogeneous PVC Compact floor covering	Modular heterogeneous product with interlocking connection	Heterogeneous Acoustic Resilient Floorcovering
CE certification	EN 14041		Yes	
Classification	EN ISO 10874	Commercial: 33 Industrial: 42	Commercial: 34 Industrial: 43	Commercial: 34
Wear layer binder content	EN ISO 10582	Type I	Type I	Type I
Technical Characteristics				
Total thickness	EN ISO 24346	4,5 mm	5.0 mm	4,5 mm
Total weight	EN ISO 23997	7500 g/m ²	7400 g/m ²	5195 g/m ²
Wear layer thickness	EN ISO 24340	0.55 mm	0.70 mm	0.80 mm
Bevelled edges	-	Yes - 4 bevels on 3 references	No	No
Surface treatment (PUR)	-	Yes - TopCleanXP™	Yes - TopCleanXP™	Yes - TopCleanXP™
Form of delivery	EN ISO 24342	Planks 22,90 x 121,90 cm, 10 planks/box (= 2.79 m ²), 52 boxes/pallet (= 145.08 m ²) 25,4 x 152,4 cm, 6 planks/box (= 2.32 m ²), 52 boxes/pallet (= 120.74 m ²) Tiles 30,50 x 61 cm, 14 tiles/box (= 2.6 m ²), 54 boxes/pallet (= 140.40 m ²) 60x60cm, 8 tiles/box (=2.88 m ²), 40 boxes/ pallet (= 115.20 m ²)	Tiles 91.44 x 91.44 cm, 3 tiles/box = 2.51 m ² 45.72 x 45.72 cm, 10 tiles/box = 2.09 m ²	Planks 25 x 100 cm, 9 planks/box = 2.25 m ² 20 x 120 cm, 10 planks/box = 2,40m ² 20 x 120 cm Left chevron, 10 planks/box = 2,40m ² 20 x 120 cm Right chevron, 10 planks/box = 2,40m ² Tiles 50 x 50 cm, 9 tiles/box = 2.25 m ² 66 x 66 cm, 5 tiles/box = 2.22 m ² 100 x100 cm

Performance For CE Marking Requirement (EN 14041)				
Reaction to fire	EN 13501-1	B _{fl} -s1 loose laid on wood panel and A ₂ -s1 or A1fl class substrate	B _{fl} -s1 over concrete substrate	B _{fl} s1 loose-laid on an A ₁ and/or A ₂ substrate C _{fl} s1 loose-laid on a wooden sub-floor
Electrostatic properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm	< 2 kV on concrete R1 > 10 ⁹ Ω	<2 kV on concrete > 10 ⁹ Ohm
Thermal resistance	EN ISO 10456	0,04 m ² K/W	approx. 0.05 m ² K/W	0,05 m ² K/W
Antislip classification	EN 13893	μ ≥ 0.30		μ ≥ 0.30

Technical Performance				
Dimensional stability	EN ISO 23999	≤ 0,10 %	< 0.15 %	≤ 0,10 %
Reduction of in-room impact noise	EN ISO 31-074			Class B - L _{n,e,w} = < 75 dB
Accoustical absorption	EN ISO 11654			αW = 0.05
Curl resultant to heat	EN ISO 23999	≤ 1 mm	≤ 2 mm	
Impact sound reduction	EN ISO 717-2	ΔLw = 8 dB	ΔLw = 6 dB	ΔLw = 15 dB
Slip resistance	DIN 51130	R9	μ ≥ 0.30 DS R9	R9/R10 depending on Embossing
Furniture leg	EN 424	No damage	No damage	No damage
Castor chair	ISO 4918	No damage	No damage	No damage
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6
Residual indentation	EN ISO 24343-1	≤ 0,10 mm	< 0.10 mm	≤ 0,10 mm
Chemical resistance	EN ISO 26987	Very good	Resistance	Very good
Underfloor heating	-	Suitable - max. 27 °C		Suitable - max. 27 °C

Environmental Tag				
Total VOC emission	ISO 16000-9	<100 µg/m ³	< 100 µg/m ³	<10 µg/m ³ (after 28 days)
Recyclable	-	100%	100%	100%
Plasticizer	-	Phthalate-free	Phthalate-free	Phthalate-free

Warranties				
Commercial warranty	-		10 years	

CE Marking				
DoP number	-	0131-0055-DoP-2015-01	0131-0054-DoP-2015-01	0120-0067-DoP-2014-11

iD INSPIRATION LOOSE-LAY

•NEW•


- Tarkett exclusive anti-skid backing preventing sliding in all directions
- No permanent adhesive needed; fast and easy installation
- Excellent resistance to scratches and abrasion
- Excellent acoustic efficiency
- Superior indentation resistance
- 36 high end wood and ceramic imitative decors




TECHNICAL DATA

	Standards	iD Inspiration Loose-lay
Certification & Classification		
Type of floor covering	EN ISO 10582:2010	Heterogeneous PVC Compact floor covering
Classification	EN ISO 10874	Commercial: 33 Industrial: 42
Wear layer binder content	EN ISO 10582	Type I
Technical Characteristics		
Total thickness	EN ISO 24346	4,5 mm
Total weight	EN ISO 23997	7500 g/m ²
Wear layer thickness	EN ISO 24340	0.55 mm
Bevelled edges	-	Yes - 4 bevels on 3 references
Surface treatment (PUR)	-	Yes - TopCleanXP™
Form of delivery	EN ISO 24342	Planks 22,90 x 121,90 cm, 10 planks/box (= 2.79 m ²), 52 boxes/pallet (= 145.16 m ²) 25,4 x 152,4 cm, 6 planks/box (= 2.32 m ²), 52 boxes/pallet (= 120.74 m ²) Tiles 30,50 x 61 cm, 14 tiles/box (= 2.6 m ²), 54 boxes/pallet (= 140.65 m ²) 60x60cm, 8 tiles/box (=2.88 m ²), 40 boxes/pallet (= 115.20 m ²)
PERformance For CE Marking Requirement (EN 14041)		
Reaction to fire	EN 13501-1	B _{fl} -s1 loose laid on wood panel and A2 _{fl} -s1 or A1 _{fl} class substrate
Electrostatic properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Thermal resistance	EN ISO 10456	0,04 m ² K/W
Antislip classification	EN 13893	μ ≥ 0.30
Technical Performance		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 1 mm
Impact sound reduction	EN ISO 717-2	ΔLw = 8 dB
Slip resistance	DIN 51130	R9
Furniture leg	EN 424	No damage
Castor chair	ISO 4918	No damage
Light fastness	EN ISO 105-B02	≥ 6
Residual indentation	EN ISO 24343-1	≤ 0,10 mm
Chemical resistance	EN ISO 26987	Very good
Underfloor heating	-	Suitable - max. 27 °C
Warranties		
Commercial warranty	-	10 years
CE Marking		
DoP number	EN 14041	0131-0055-DoP-2015-01

Delicate Wood

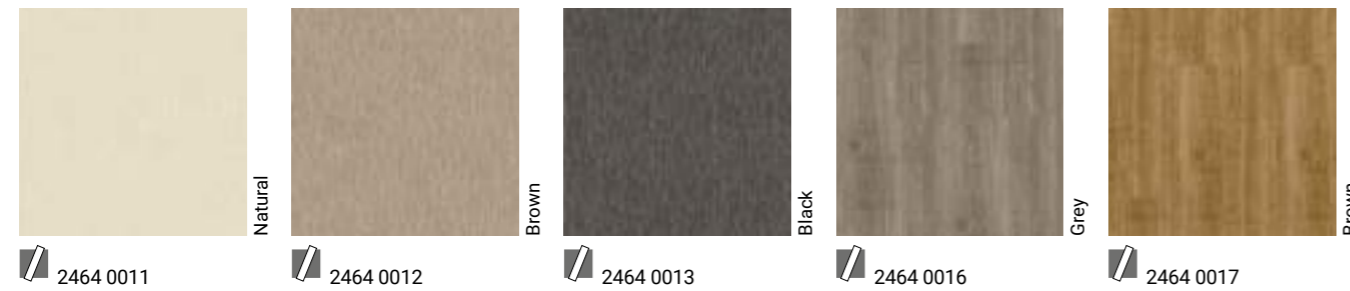

Sawn Oak

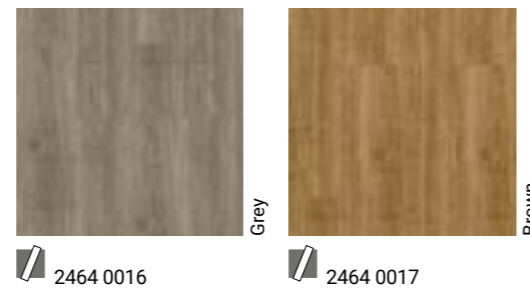

Beach Wood



Elegant Oak



Surface Treatment	Logistics Information	Sustainability credentials
	<p>Available in planks</p> <p>22,9 x 121,9cm 25,4 x 152,4cm</p> <p>Available in tiles</p>	

ID INSPIRATION LOOSE-LAY

Limed Oak



Beige

2464 0000



Grey

2464 0001



Honey

2464 0019

Christmas Pine



White

2464 0006



Natural

2464 0007

Scandinavian Oak



Light Grey

2464 0023



Light Beige

2464 0024



Medium Beige

2464 0025

Mountain Oak



Natural

2464 0003



Black

2464 0005

Living Oak



Brown

2464 5020



Grey

2464 5021



Natural

2464 5022

Modern Terrazo



Grey

2464 4035



Black

2464 4036

Cotton



Brown

2464 4032



Light Grey

2464 4033



Medium Grey

2464 4034

Metal Plate



Grid

2464 4037



Sand


2464 4038

Concrete



Sand

2464 4027



Anthracite

2464 4028



White

2464 4029

Beton



Grey

2464 1002



Light Grey

2464 1026

Marble



Black

2464 4030

Slate




Relaxed

2464 4031

Logistics Information

Available in planks



Available in tiles



Page 482
Coordinated
accessories
offer


ID TILT •NEW•

- New designs and formats to perfectly fit to your project
- Extreme connection resistance, for long-lasting performance in high traffic areas
- Easy and quick installation thanks to its interlocking connection (no glue, no click)
- Excellent value for money




Granite - Grey


Granite

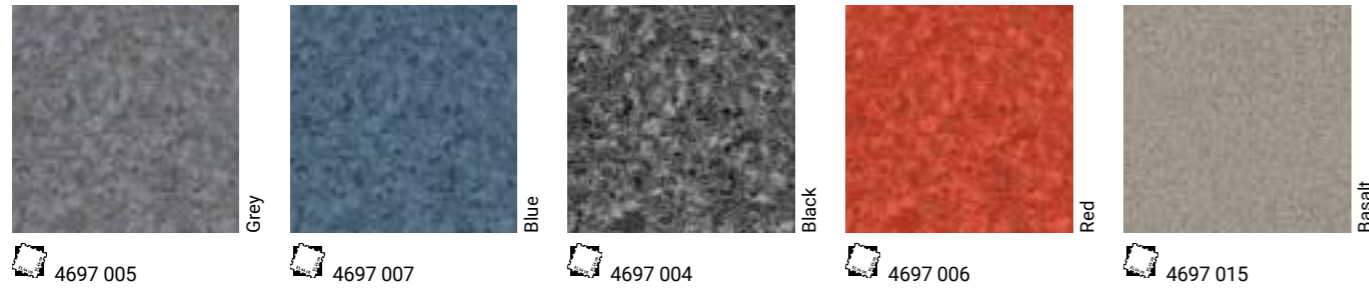

Concrete

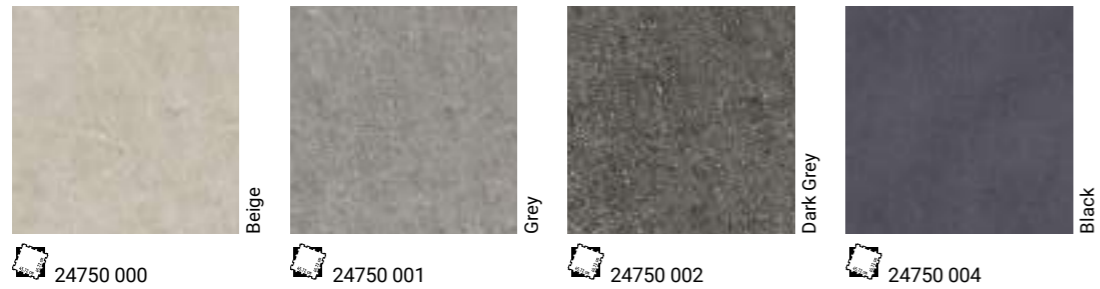

Woven

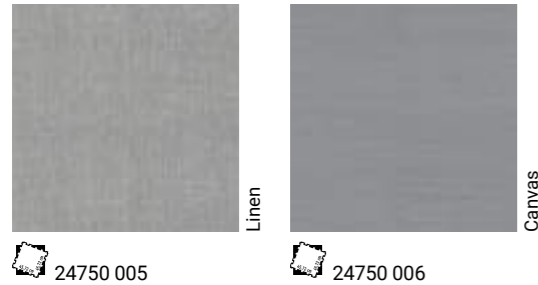

TECHNICAL DATA

	Standards	ID TILT
Certification & Classification		
Type of floor covering	EN ISO 10582	Modular heterogeneous product with interlocking connection
CE certification	EN 14041	Yes
Classification	EN ISO 10874 (EN 685)	Commercial: 34 Industrial: 43
Wear layer binder content	EN ISO 10582	Type I
Technical Characteristics		
Total thickness	EN ISO 24346	5.0 mm
Total weight	EN ISO 23997	7400 g/m ²
Wear layer thickness	EN ISO 24340	0.70 mm
Bevelled edges	-	No
Surface treatment (PUR)	-	Yes - TopCleanXP™
Dimensions	EN ISO 24342 - EN 427	Tiles* 91.44 x 91.44 cm (Granite), 3 tiles/box = 2.51 m ² - 18,56 kg 45.72 x 45.72 cm (Concrete - Tarmac - Woven), 10 tiles/box = 2.09 m ² - 15,47 kg
PERformance For CE Marking Requirement (EN 14041)		
Reaction to fire	EN 13501-1	B _f -s1 over concrete substrate
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ω
Thermal resistance	EN ISO 10456	approx. 0.05 m ² K/W
Antislip classification	EN 13893	
Technical Performance		
Dimensional stability	EN ISO 23999 - EN 434	< 0.15 %
Curl resultant to heat	EN ISO 23999 - EN 434	≤ 2 mm
Impact sound reduction	EN ISO 717-2	ΔL _w = 6 dB
Slip resistance	EN 13893 DIN 51130	μ ≥ 0.30 DS R9
Furniture leg	ISO 16581 - EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Light fastness	EN ISO 105-B02	≥ 6
Residual indentation	EN ISO 24343-1 - EN 433	< 0.10 mm
Resistance to chemicals	EN ISO 26987 - EN 423	Resistance
Warranties		
Commercial warranty	-	10 years
CE Marking		
DoP number	-	0131-0054-DoP-2015-01

*The 2 formats are not interconnectable

Surface Treatment	Logistics Information	Sustainability credentials
	<p>Available in tile with interlocking connection system</p>	





iD SQUARE •NEW•


- No permanent adhesive needed; fast and easy installation
- Excellent resistance to scratches and abrasion
- Excellent acoustic efficiency (15dB)
- Confort underfoot (low walking noise)
- 50 trendy textiles, artistic, wood and ceramic decors
- Many customization possibilities (Format, Colors and Designs)



Patine

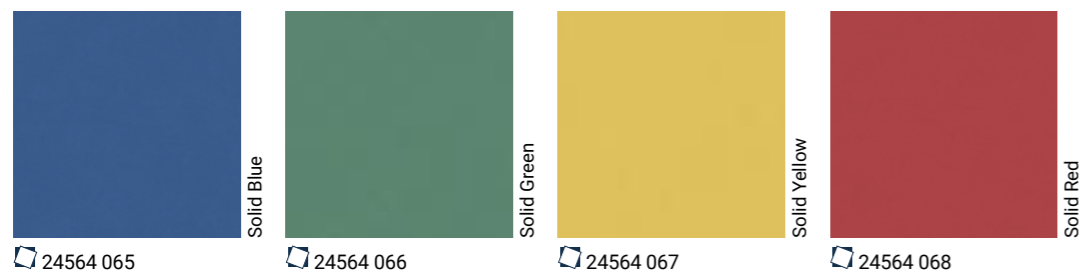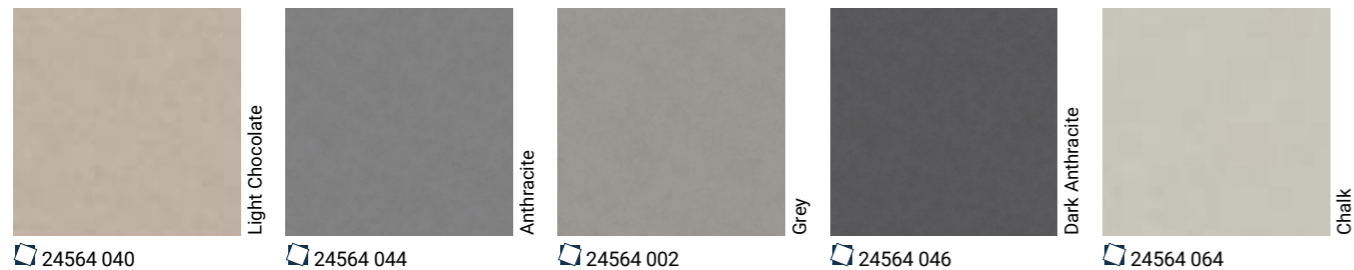

Dashes

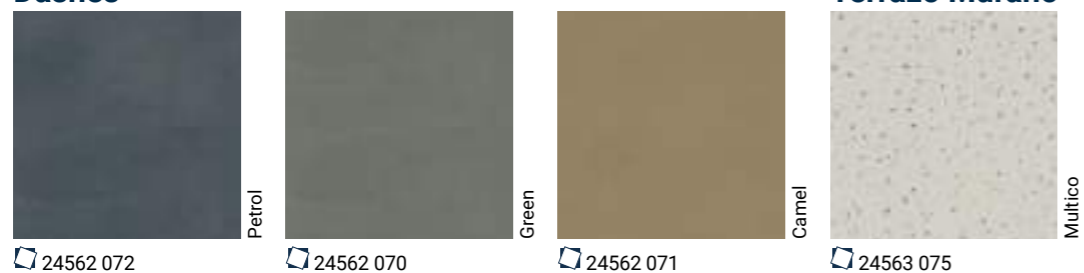

TECHNICAL DATA

	Standards	iD Square
Certification & Classification		
Type of floor covering	EN ISO 10582 EN 651	Heterogeneous Acoustic Resilient Floorcovering
Classification	EN ISO 10874	Commercial: 34
Wear layer binder content	EN ISO 10582	Type I
Technical Characteristics		
Total thickness	EN ISO 24346	4,5 mm
Total weight	EN ISO 23997	5195 g/m ²
Wear layer thickness	EN ISO 24340	0.80 mm
Bevelled edges	-	No
Surface treatment (PUR)	-	Yes - TopCleanXP™
Form of delivery	EN ISO 24342	Planks 25 x 100 cm, 9 planks/box = 2,25 m ² 20 x 120 cm, 10 planks/box = 2,40m ² 20 x 120 cm Left chevron, 10 planks/box = 2,40m ² 20 x 120 cm Right chevron , 10 planks/box = 2,40m ² Tiles 50 x 50 cm, 9 tiles/box = 2,25 m ² 66 x 66 cm, 5 tiles/box = 2,22 m ² 100 x100 cm
PERformance For CE Marking Requirement (EN 14041)		
Reaction to fire	EN 13501-1	B _{fl} s1 loose-laid on an A1 _{fl} and/or A2 _{fl} substrate C _{fl} s1 loose-laid on a wooden sub-floor
Electrostatic properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Thermal resistance	EN ISO 10456	0,05 m ² K/W
Antislip classification	EN 13893	μ ≥ 0.30
Technical Performance		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Reduction of in-room impact noise	EN ISO 31-074	Class B - L _{na,w} = < 75 dB
Accoustical absorption	EN ISO 11654	αW = 0.05
Impact sound reduction	EN ISO 717-2	ΔLw = 15 dB
Slip resistance	DIN 51130	R9/R10 depending on Embossing
Furniture leg	EN 424	No damage
Castor chair	ISO 4918	No damage
Light fastness	EN ISO 105-B02	≥ 6
Residual indentation	EN ISO 24343-1	≤ 0,10 mm
Chemical resistance	EN ISO 26987	Very good
Underfloor heating	-	Suitable - max. 27 °C
Warranties		
Commercial warranty	-	10 years
CE Marking		
DoP number	EN 14041	0120-0067-DoP-2014-11

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	Available in planks 25 x 100cm 25 x 120cm Available in tiles 50 66 100	 Square tiles	



iD SQUARE

Minimal Wood



24563 100 24567 100 Natural
 24563 102 24567 102 Dark Grey
 24563 101 24567 101 Grey

English Oak




24591 304 24591 302 24591 305 24591 301 24591 303 Dark Grege Warm Gold Beige Grege Grey

Citizen Oak



24591 300 24591 087 24591 088 Black Golden Natural

Tisse

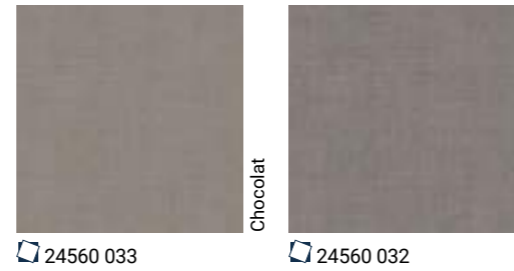

24560 033 24560 032 Chocolat Dark Grey

Walnut



24591 089 Walnut

Chambray



24563 080 24588 080 Light Grey
 24563 079 Denim
 24563 081 Dark Grey
 24563 082 Grey Beige
 24563 083 Green

Carpet




24563 084 Ochre
 24563 085 Dark Denim
 24563 086 Petrol
 24563 073 Grey
 24563 074 Denim

Woven Vinyl



24562 090 Dark
 24562 091 24589 091 Natural
 24562 092 Bicolor

Marble Pulpis

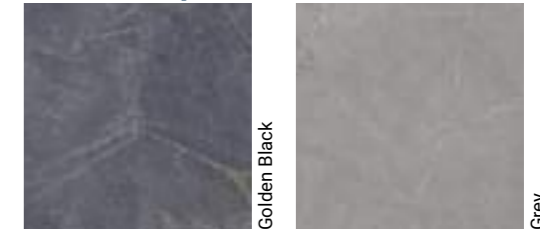


24563 077 Golden Black
 24563 078 Grey

Vintage Zinc



24565 000 Dark Grey
 24565 002 Metallic
 24563 069 Oxyde

Travertine



24563 076 Chalk

Cement Chevron



24563 096 Medium Grey


Cement




24563 094 Light Grey
 24563 095 24588 095 Medium Grey
 24563 093 Dark Grey

Logistics Information

Available in planks



Available in tiles





The comprehensive decorative solution for domestic interiors

SENSORIAL BENEFITS


- Coordinated colours and patterns
- A large choice of designs
- Personalise every aspect of your project using feature lines and matching skirtings

FUNCTIONAL BENEFITS

- High resistance with 0.30mm transparent wear-layer
- Easy to maintain

ENVIRONMENTAL BENEFITS

- Low VOC emissions contribute to better indoor air quality
- 100% recyclable
- Phthalate-free technology

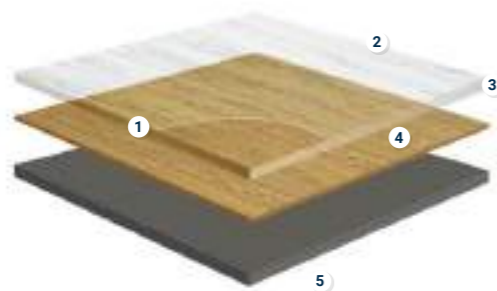

ID ESSENTIAL

- Surface embossing:** textures close to real materials
- TopClean™ PUR reinforcement:** extreme resistance and easy low-cost maintenance
- 0.30mm pure PVC transparent wear layer:** exceptionally hard-wearing and indentation resistant
- 42 different design options**
- Calandered PVC backing**

TECHNICAL OVERVIEW

	Standards	ID ESSENTIAL 30
Certification & Classification		
Type of floor covering	EN ISO 10582	Compact Resilient Floorcovering
CE certification	EN 14041	Yes
Class of use	EN ISO 10874	Domestic: 23 Commercial: 31
Technical Characteristics		
Plasticizer	-	Phthalate-free
Overall thickness	EN ISO 24346	2,0 mm
Wear layer thickness	EN ISO 24340	0,30 mm
Surface treatment (PUR)	-	Yes - TopClean™
Total weight	EN ISO 23997	3400 g/m ²
Abrasion group	EN 660-2 EN ISO 10582	≤ 2 mm ³ Type I
Dimensions	EN ISO 24342	Planks: 22.9 x 121.9 cm - 12 planks / box = 3.35 m ² 15.2 x 91.4 cm - 24 planks / box = 3.33 m ² Tiles: 30.5 x 61 cm - 18 tiles / box = 3.35 m ²
Technical Performance		
Dimensional stability	EN ISO 23999	≤ 0,25 %
Reaction to fire	EN 13501-1	Bfl-s1
Residual indentation	Average measured value EN ISO 24343-1	0,3 mm ≤ 0,1 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918	No damage
Reduction on transmitted impact noise	EN ISO 717-2	4 dB
Thermal resistance Underfloor heating	ISO 10456	0,07 m ² K/W Suitable - max. 27°C
Light fastness	EN ISO 105-B02 Method 3	≥ 6
Resistance to chemicals	EN ISO 26987	Good
Antislip classification	DIN 51130 EN 13893	R9
Electrical properties	EN 1815 EN 1081	<2 kV on concrete ≥ 10 ⁹ Ohms
Warranties		
Commercial warranty	-	10 years
CE Marking		
DoP number	-	0120-043DoP-2013-04

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	<p>Available in planks</p> <p>Available in tiles</p>		




- Best value for money
- Resistant product with 0.30mm transparent wear-layer
- TopClean™ surface protection for great resistance and easy cleaning
- Choose the natural look of Country Oak designs, featuring a registered embossing - feels like wood !

ID ESSENTIAL 30


Venezia - Grey

Page 474
Coordinated accessories offer


Smoked Oak

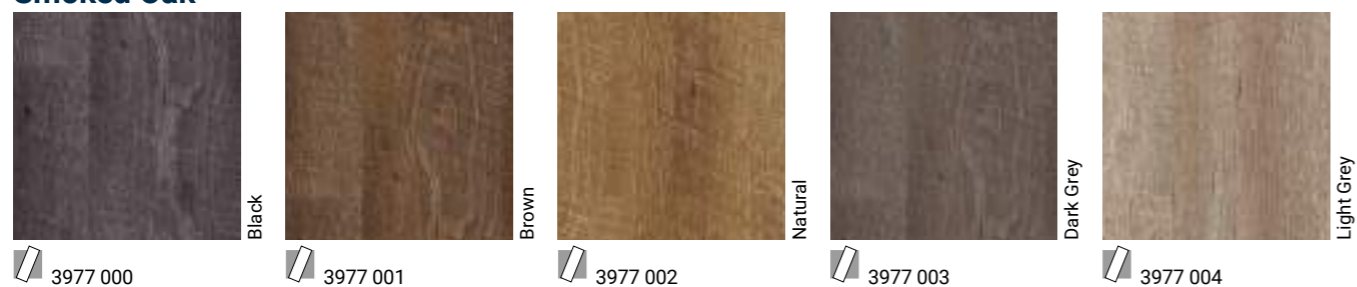

Soft Oak

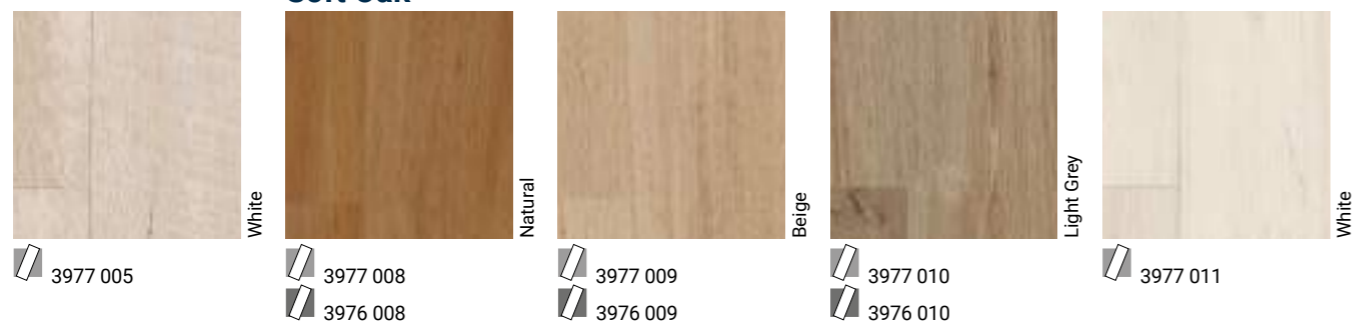


Aspen Oak

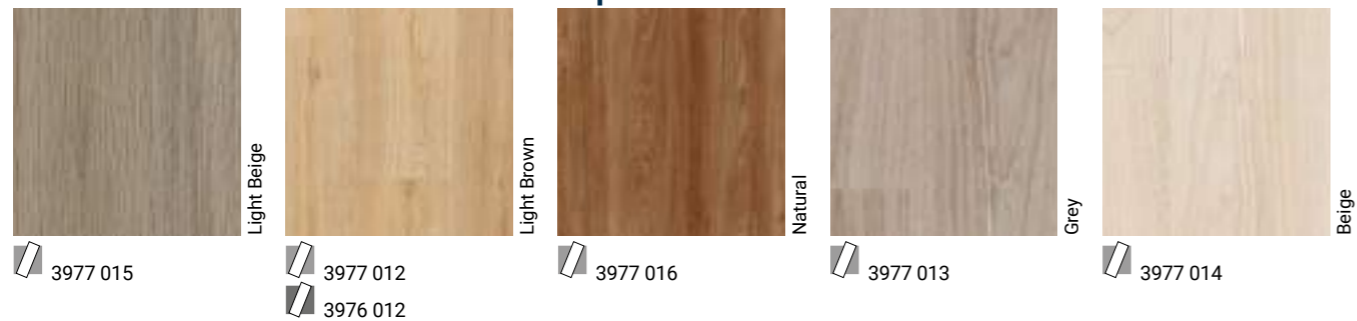


Primary Pine



Washed Pine

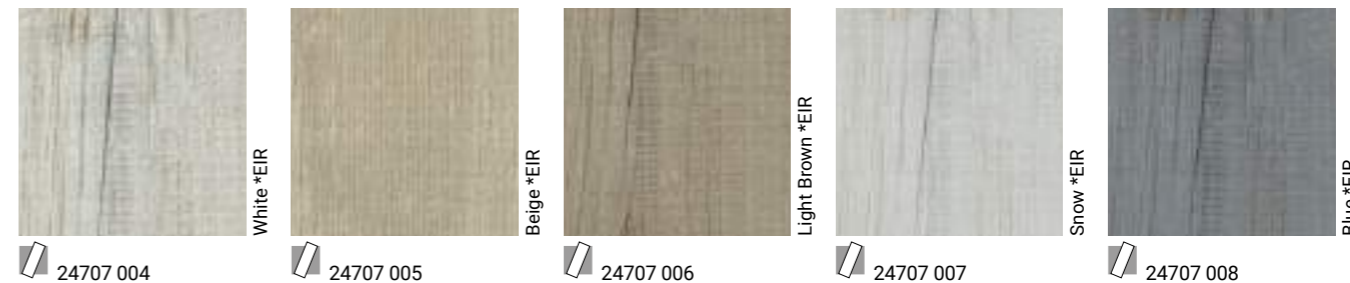

Venezia

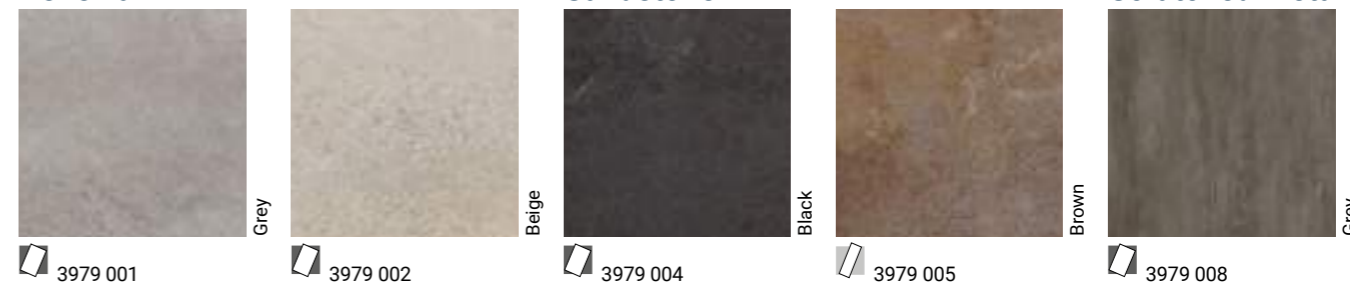


Original Slate



Country Oak




Cerused Oak

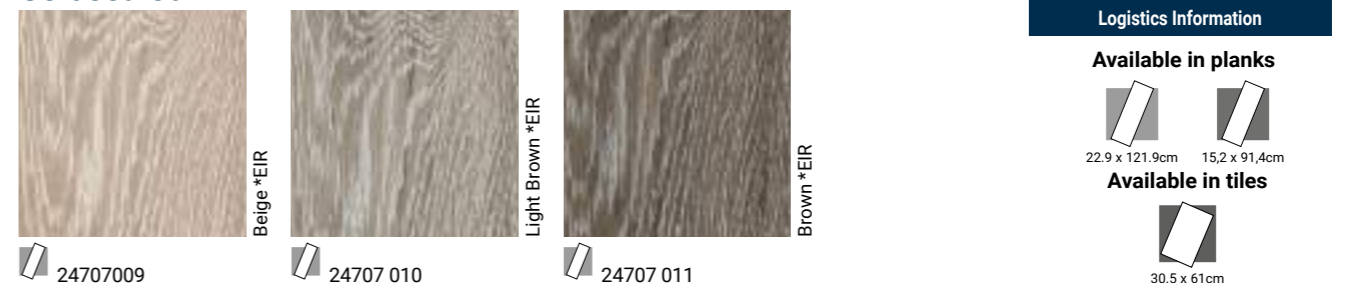

Logistics Information

Available in planks



Available in tiles





The ideal choice for new build and renovation in domestic environments

SENSORIAL BENEFITS


- Coordinated colours and designs
- Matching skirtings for a perfect finish
- Range of stylish accessories available

FUNCTIONAL BENEFITS

- Little or no subfloor preparation required
- Click system enables floating installation without glue and is quicker to install
- Easier and cheaper to renovate - can be removed without damaging the subfloor
- Acoustic reduction of 13dB with Tarkomfort Pro underlayer

ENVIRONMENTAL BENEFITS

- Low VOC emissions contribute to better indoor air quality
- No glue required
- 100% Phthalate-free

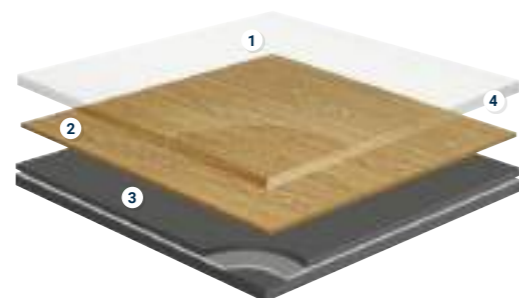

ID ESSENTIAL CLICK

- 1 Top surface treatment
- 2 Design printed PVC film
- 3 PVC Compact backing and middle layers
- 4 Ultra tough transparent PVC wear layer

TECHNICAL OVERVIEW

	Standards	iD Essential Click
Certification & Classification		
Type of floor covering	EN ISO 10582	Compact Resilient Floorcovering
CE certification	-	Yes
Class of use	EN ISO 10874 EN ISO 10874	Residential: 23 Commercial: 31
Technical Characteristics		
Total thickness	EN ISO 24346	4.0 mm
Wear layer thickness	EN ISO 24340	0.30 mm
Surface treatment (PUR / Extreme)	-	Yes
Beveled edges	-	Yes - micro bevel
Total weight	EN ISO 23997	7.400 g/m ²
Wear layer binder content	ISO 10582	Type I
Abrasion group	EN 660-2	Group T: ≤ 2.00 mm ³
Dimensions	EN ISO 24342	Planks 18,3 x 122 cm 9 planks / box (= 2,009 m ²) Tiles 31 x 60,3 cm 9 planks / box (= 1,682 m ²)
Technical Performance		
Dimensional stability	EN ISO 23999	≤ 0.10 %
Reaction to fire	EN 13501-1	Bfl-s1 loose laid on concrete and on wood
Residual indentation	EN ISO 24343-1	≤ 0.08 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918	No damage
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Impact sound reduction	NF EN ISO 717-2	ΔLw = 5 dB 13 db with Tarkomfort Pro underlayer
Reduction of in room impact noise	NF S31-074	Suitable – max. 27°C
Underfloor heating	-	0.03m ² K/W
Thermal resistance	ISO 10456	≥ 6
Light fastness	EN ISO 105-B02	High resistance
Resistance to chemicals	EN ISO 26987	μ ≥ 0,30
Slip resistance	EN 13893 DIN 51130	R10
Electrostatic properties	EN 1081 EN 1815	<2 kV on concrete R1 > 10 ⁹ Ohms
CE Marking		
DoP number	-	0131-0058-DoP-2015-06

Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
	<p>Available in planks or tiles</p> 18.3 x 122cm 31 x 60.3cm		

- TopClean™ surface protection for resistance and easy cleaning
- Excellent indentation resistance
- Excellent acoustic performances (up to 13 dB with Tarkomfort Pro underlayer)
- Perfect colour-matched skirtings for a perfect finish

Page 482
Coordinated accessories offer



iD ESSENTIAL CLICK

Toasted Oak - Light Natural/ Dark Grey

Limewashed Oak*



Beige

24722 000



Brown

24722 001

Delicate Oak



Natural

24722 002

Toasted Oak



Light Natural


24722 003



Dark Grey

24722 004


Stone



Grey


24723 000

Rust Metal



Brown

24723 001



Black

24723 002

Logistics Information

Available in planks or tiles



18,3 x 122cm



31 x 60,3cm

Limewashed Oak - Brown

* For the Limewashed Oak design, the color may vary from one plank to another.

OUR SELECTION OF ACCESSORIES FOR LUXURY VINYL TILE



1

Floorcraft

Selection of designs to be inserted into any floor area.

See p. 500 for detailed info

2

Flexible ramp profile

Bendable aluminium profile to join different profiles and fit shape.

See p. 486 for detailed info

3

Feature strips

Create visual effects with contrasts of colour between planks.

See p. 481 for detailed info

4

Transition profile

Self-adhesive aluminium profile used at doorstep to join different floorings.

See p. 485 for detailed info

5

Skirting

PVC skirting with decorative film for perfect matching.

See p. 480 for detailed info

6

Set-on skirting

Insert your flooring into the skirting for perfect colour matching.

See p. 482 for detailed info

Other available accessories

-Stair nosings
See p. 488 for detailed info

-Acoustic underlayer
See p. 498 for detailed info

-Studs
See p. 491 for detailed info

