

Linoleum


LINOLEUM xf <sup>2</sup> ™	
250	Veneto xf <sup>2</sup> ™
258	Style Elle xf <sup>2</sup> ™
260	Style Emme xf <sup>2</sup> ™
262	Trentino xf <sup>2</sup> ™ <span style="float: right;">N</span>
264	Etrusco xf <sup>2</sup> ™
266	Veneto Sicuro xf <sup>2</sup> ™ R10
ESSENZA	
272	Veneto Essenza
274	Originale Essenza <span style="float: right;">N</span>






# LINOLEUM

## ROLLS 2M WIDTH

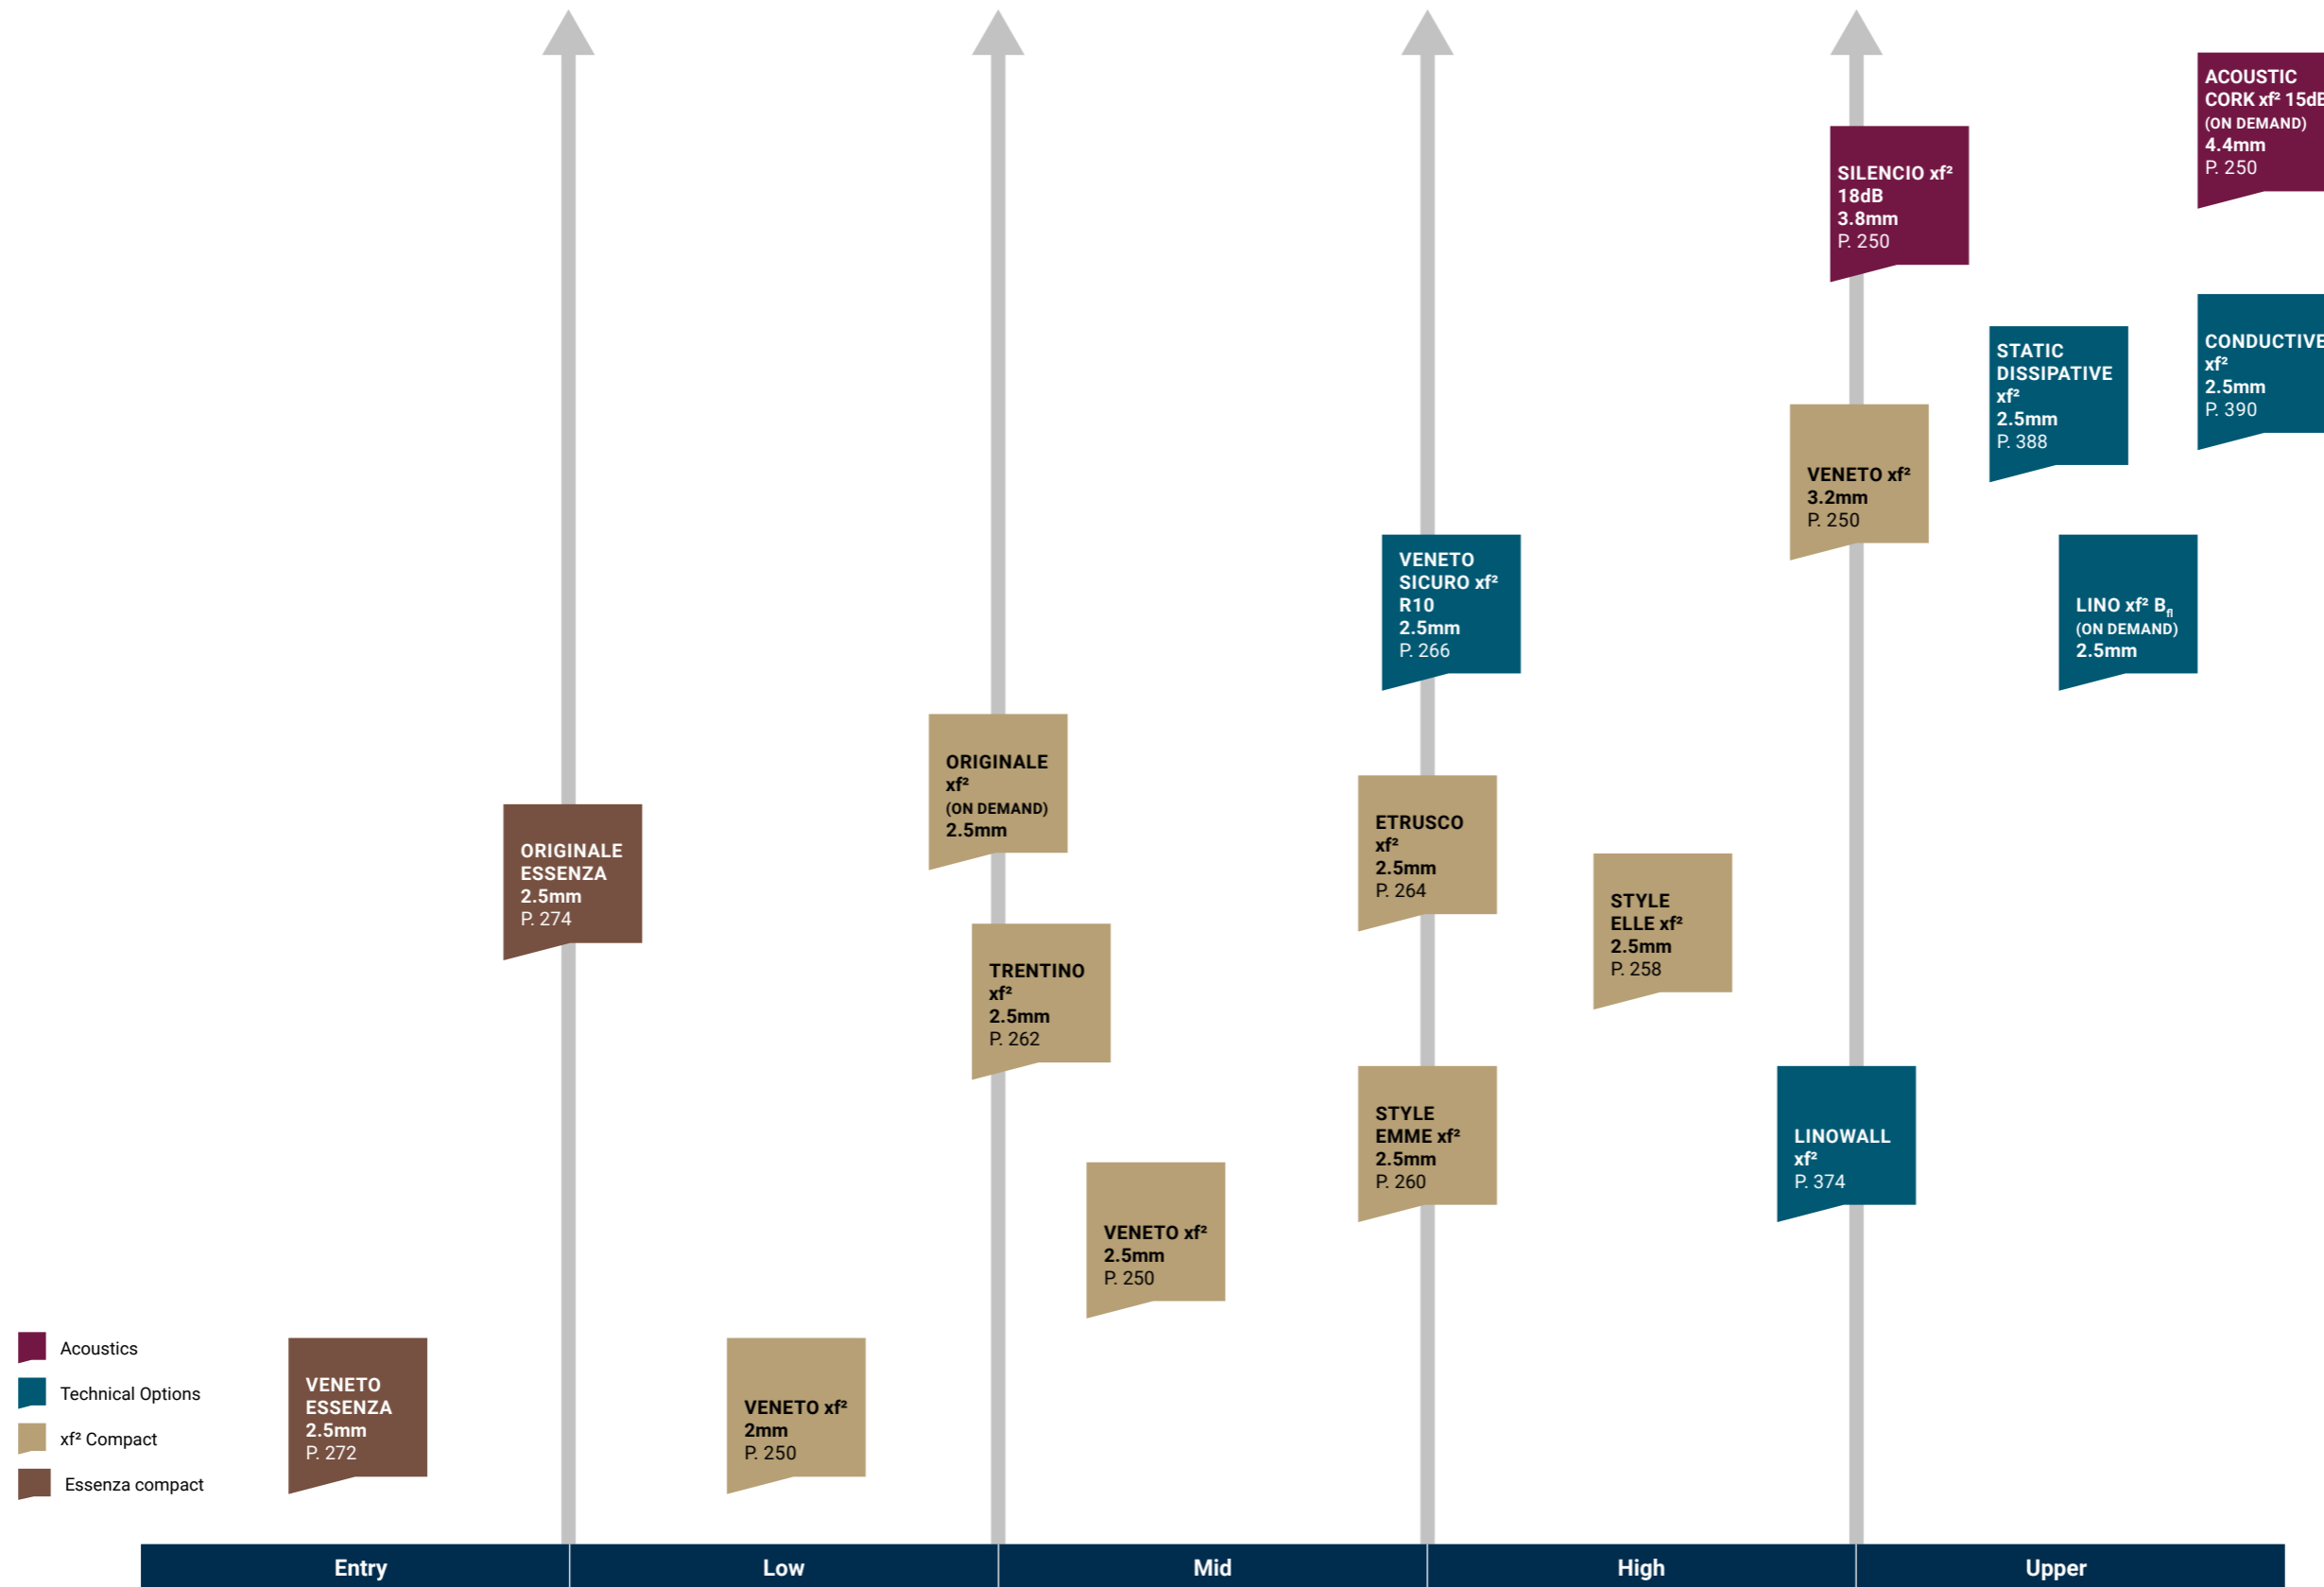




A colourful collection with the xf<sup>2</sup>™ surface treatment for truly distinctive decors in educational, healthcare and office environments

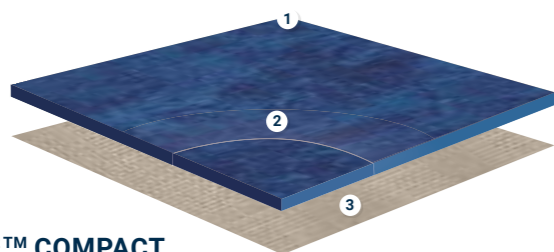

### XF<sup>2</sup>™ COMPACT

- 1 **xf<sup>2</sup>™ surface treatment**  
excellent performance and resistance to abrasion
- 2 **Pure linoleum**  
stable design throughout product lifetime
- 3 **Jute backing**  
100% natural support

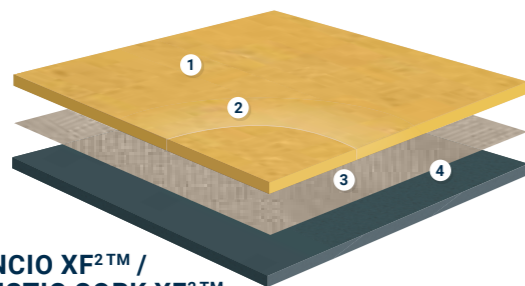

### SILENCIO XF<sup>2</sup>™ / ACOUSTIC CORK XF<sup>2</sup>™

- 1 **xf<sup>2</sup>™ surface treatment**  
excellent performance and resistance to abrasion
- 2 **Pure linoleum**  
stable design throughout product lifetime
- 3 **Jute backing**  
100% natural support
- 4 **Recycled polyurethane foam backing / cork backing**  
Silencio: 18dB impact sound reduction  
Acoustic Cork: 15dB impact sound reduction

### SENSORIAL BENEFITS

- Matt appearance for a natural look
- Vibrant, contemporary colour and designs that are easy to co-ordinate
- 112 colours and 7 designs
- Acoustic options with -15dB and -18dB
- Matching skirting, corners, wall bases and welding rods available

### FUNCTIONAL BENEFITS

- Save time and money on maintenance with the xf<sup>2</sup>™ surface treatment: no polish, no stripping or polymer waxing over the lifetime of the product!\*
- Naturally bactericidal
- Tailored solutions for specific needs: Sicuro xf<sup>2</sup>™ R10, Linoleum xf<sup>2</sup>™ Static Dissipative and xf<sup>2</sup>™ Conductive (cf the "Static Control" section)
- LinoWall for protection and decoration (cf.p.374)

### ENVIRONMENTAL BENEFITS

- Made with natural and renewable ingredients and produced in Narni (Italy) in a sustainable way
- First cradle to cradle certified linoleum
- Naturally phthalate-free
- Contributes to better indoor air quality (FloorScore® certified)
- Awarded by Allergy UK Seal of Approval for its undisputed healthy quality thanks to its removal ease of allergens.
- 100% recyclable
- Simplified maintenance for a reduced carbon footprint

\*= providing soil barrier are correctly put in place, regular maintenance is operated (daily vacuuming and mopping), furniture have appropriate leg covering and daily surveillance

# TECHNICAL OVERVIEW

Classification	Standards	Veneto xf <sup>2</sup> ™ 2mm	Veneto xf <sup>2</sup> ™ Style Emme xf <sup>2</sup> ™ Style Elle xf <sup>2</sup> ™ Trentino xf <sup>2</sup> ™ 2.5mm	Linoleum xf <sup>2</sup> B <sub>n</sub> 2.5mm	Veneto xf <sup>2</sup> ™ 3.2mm	Veneto Sicuro xf <sup>2</sup> ™ R10 2.5mm	Silencio xf <sup>2</sup> ™ 3.8mm	Veneto Acoustic Cork xf <sup>2</sup> ™ 4.4mm	Etrusco xf <sup>2</sup> ™ 2.5mm
Type of floor covering	ISO 24011 (EN 548)	One single layer calendared linoleum on jute backing.							
	EN 686	-	-	-	-	-	Linoleum on a foam backing	-	-
	EN 687	-	-	-	-	-	-	Linoleum on a corkment backing	-
Classification	ISO 10874 domestic commercial light industrial	Classes: 23 32 41	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 33 41	Classes: 23 34 42	Classes: 23 34 43
<b>Characteristics</b>									
Surface Treatment		xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™
Total thickness	ISO 24346	2.00mm	2.50mm	2.50mm	3.20mm	2.50mm	3.80mm	4.4mm	2.50mm
Total weight	ISO 23997	ca. 2 400g/m <sup>2</sup>	ca. 3 000g/m <sup>2</sup>	ca. 3 200g/m <sup>2</sup>	ca. 3 900g/m <sup>2</sup>	ca. 3 000g/m <sup>2</sup>	ca. 3 450g/m <sup>2</sup>	ca. 4 600g/m <sup>2</sup>	ca. 3 000g/m <sup>2</sup>
<b>Technical performance</b>									
Reaction to fire	EN 13501-1	C <sub>fl</sub> s1	C <sub>fl</sub> s1	B <sub>fl</sub> s1	C <sub>fl</sub> s1	C <sub>fl</sub> s1	C <sub>fl</sub> s1	C <sub>fl</sub> s1	C <sub>fl</sub> s1
Residual indentation	EN ISO 24343-1 Standard requirements Best measured value	≤ 0.15 mm ca. 0.07 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.10 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.30 mm ca. 0.20 mm	≤ 0.40 mm ca. 0.25 mm	≤ 0.15 mm ca. 0.08 mm
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R10 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30
Flexibility	ISO 24344 Method A	≤ 25mm	≤ 30mm	≤ 30mm	≤ 40mm	≤ 30mm	≤ 30mm	≤ 30mm	≤ 30mm
Castor chair	ISO 4918	Suitable for office chairs with castors type W (Norm EN 12529)							
Static electrical propensity	EN 1815	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV
Chemical resistance	ISO 26987	Resistant to dilute acids, oils, fats, current solvents and alkalis							
Thermal resistance Underfloor heating	ISO 10456	0.012m <sup>2</sup> K/W Suitable	0.015m <sup>2</sup> K/W Suitable	0.015m <sup>2</sup> K/W Suitable	0.019m <sup>2</sup> K/W Suitable	0.015m <sup>2</sup> K/W Suitable	0.040m <sup>2</sup> K/W Suitable	0.045m <sup>2</sup> K/W Suitable	0.015m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Impact sound reduction	EN ISO 10140-3 EN ISO 717-2	5dB	6dB	6dB	8dB	6dB	18dB	15dB	6dB
Impact sound reduction with Elafono**		14dB	14dB	14dB	15dB	14dB	Not applicable		14dB
Acoustic improvement	NF S31-074	Class C (Ln,e,w<85dB)	Class C (Ln,e,w<85dB)	Class C (Ln,e,w<85dB)	Class B (Ln,e,w<75dB)	Class C (Ln,e,w<85dB)	Class A (Ln,e,w<65dB)	Class B (Ln,e,w<75dB)	Class C (Ln,e,w<85dB)
Determination of antibacterial activity	ISO 22196	Naturally bactericidal (Bacteria mix- Ecoli and MRSA)							
Odor test requirement of emission class M1	EN ISO 16000-28 i. A., VDI4302	Meets requirement							
Colours		20	60 (Veneto) 13 (Style Emme) 8 (Style Elle) 10 (Trentino)	ON REQUEST 60 (Veneto) 13 (Style Emme) 8 (Style Elle) 16 (Etrusco) 10 (Trentino)	9	ON REQUEST 60 (Veneto)	27 (Veneto) 8 (Style Emme) 1 (Style Elle) 3 (Etrusco) ON REQUEST 10 (Trentino)	ON REQUEST 60 (Veneto)	16
Form of delivery	EN ISO 24341	≤ 32 x 2 m	≤ 32 x 2 m	≤ 32 x 2 m	≤ 32 x 2 m	≤ 32 x 2 m	≤ 32 x 2 m or ≤ 32 x 1.95 m (subject to availability-please check upon order)		≤ 32 x 2 m
<b>CE Marking</b>									
DoP number	EN 14041	0200-0010-DoP 2013-07	0200-0001-DoP 2013-07	0200-0014-DoP 2013-07	0200-0012-DoP 2013-07	0200-0005-DoP 2013-07	0200-0027-DoP 2013-07	0200-0025-DoP 2013-07	0200-0020-DoP 2013-07

\*\*Elafono: 2.0 mm traditional, 100% natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -15dB, depending on the product). Available in rolls ≤32 x 2m.

Product certification	International certification	Factory certification
All our linoleum ranges (except SD Static Dissipative xf <sup>2</sup> ™ and Linoleum Conductive xf <sup>2</sup> ™ ranges)		

- Superior xf<sup>2</sup>™ surface protection for extreme mechanical and chemical toughness
- The classical marbled linoleum solution with soft or intense pattern variations for a timeless effect
- All 60 Veneto colours also available on request in Acoustic Cork 15dB

## TECHNICAL DATA

Classification	Standards	Veneto xf <sup>2</sup> ™ 2mm	Veneto xf <sup>2</sup> ™ 2.5mm	Veneto xf <sup>2</sup> B <sub>n</sub> 2.5mm (ON REQUEST)	Veneto xf <sup>2</sup> ™ 3.2mm	Veneto Sicuro xf <sup>2</sup> ™ R10 2.5mm (ON REQUEST)	Silencio xf <sup>2</sup> ™ 3.8mm	Veneto Acoustic Cork xf <sup>2</sup> ™ 4.4mm (ON REQUEST)
Type of floor covering	ISO 24011 (EN 548)	One single layer calendered linoleum on jute backing.						
	EN 686	-	-	-	-	-	Linoleum on a foam backing	-
	EN 687	-	-	-	-	-	-	Linoleum on a corkment backing
Classification	ISO 10874 domestic	Classes: 23	Classes: 23	Classes: 23	Classes: 23	Classes: 23	Classes: 23	Classes: 23
	commercial	32	34	34	34	34	33	34
	light industrial	41	43	43	43	43	41	42
<b>Characteristics</b>								
Surface Treatment		xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™
Total thickness	ISO 24346	2.00mm	2.50mm	2.50mm	3.20mm	2.50mm	3.80mm	4.4mm
Total weight	ISO 23997	ca. 2 400g/m <sup>2</sup>	ca. 3 000g/m <sup>2</sup>	ca. 3 200g/m <sup>2</sup>	ca. 3 900g/m <sup>2</sup>	ca. 3 000g/m <sup>2</sup>	ca. 3 450g/m <sup>2</sup>	ca. 4 600g/m <sup>2</sup>
<b>Technical performance</b>								
Reaction to fire	EN 13501-1	C <sub>i</sub> s1	C <sub>i</sub> s1	B <sub>n</sub> s1	C <sub>i</sub> s1	C <sub>i</sub> s1	C <sub>i</sub> s1	C <sub>i</sub> s1
Residual indentation	EN ISO 24343-1 Standard requirements Best measured value	≤ 0.15 mm	≤ 0.15 mm	≤ 0.15 mm	≤ 0.15 mm	≤ 0.15 mm	≤ 0.30 mm	≤ 0.40 mm
		ca. 0.07 mm	ca. 0.08 mm	ca. 0.08 mm	ca. 0.10 mm	ca. 0.08 mm	ca. 0.20 mm	ca. 0.25 mm
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R10 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30
Flexibility	ISO 24344 Method A	≤ 25mm	≤ 30mm	≤ 30mm	≤ 40mm	≤ 30mm	≤ 30mm	≤ 30mm
Castor chair	ISO 4918	Suitable for office chairs with castors type W (Norm EN 12529)						
Static electrical propensity	EN 1815	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV
Chemical resistance	ISO 26987	Resistant to dilute acids, oils, fats, current solvents and alkalis						
Thermal resistance Underfloor heating	ISO 10456	0.012m <sup>2</sup> K/W Suitable	0.015m <sup>2</sup> K/W Suitable	0.015m <sup>2</sup> K/W Suitable	0.019m <sup>2</sup> K/W Suitable	0.015m <sup>2</sup> K/W Suitable	0.040m <sup>2</sup> K/W Suitable	0.045m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Impact sound reduction	EN ISO 10140-3 EN ISO 717-2	5dB	6dB	6dB	8dB	6dB	18dB	15dB
Impact sound reduction with Elafono**		14dB	14dB	14dB	15dB	14dB	Not applicable	
Acoustic improvement	NF S31-074	Class C (Ln,e,w<85dB)	Class C (Ln,e,w<85dB)	Class C (Ln,e,w<85dB)	Class B (Ln,e,w<75dB)	Class C (Ln,e,w<85dB)	Class A (Ln,e,w<65dB)	Class B (Ln,e,w<75dB)
Determination of antibacterial activity	ISO 22196	Naturally bactericidal (Bacteria mix- Ecoli and MRSA)						
Odor test requirement of emission class M1	EN ISO 16000-28 i. A., VDI4302	Meets requirement						
<b>CE Marking</b>								
DoP number	EN 14041	0200-0010-DoP-2013-07	0200-0001-DoP-2013-07	0200-0014-DoP-2013-07	0200-0012-DoP-2013-07	0200-0005-DoP-2013-07	0200-0027-DoP-2013-07	0200-0025-DoP-2013-07

\*\*Elafono: 2.0 mm traditional, 100% natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -15dB, depending on the product). Available in rolls ≤32 x 2m.

	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
Veneto xf <sup>2</sup> ™		<b>Grands Classiques ♥, 20 Veneto colours guaranteed in production until 2033</b> (2.0mm) (2.5mm) Available in rolls (3.2mm) Rolls length: ≤32lm		
Veneto Silencio xf <sup>2</sup> ™		Silencio (3.8mm) Rolls length: ≤32lm Acoustic Cork (4.4mm) Rolls length: ≤32lm		
Veneto Acoustic Cork xf <sup>2</sup> ™				





VENETO xf<sup>2</sup>™

Aluminium

Page 474






































































































Coordinated accessories offer



Grey

LINOLEUM


Greys


 <p>Slate ▼</p> <ul style="list-style-type: none"> <li> 2.5mm: 14872 674</li> <li> 2.5mm B<sub>fl</sub>: 14898 674*</li> <li> 3.2mm: 14873 674</li> <li> 3.8mm: 14892 674</li> <li> 4.4mm: 14881 674*</li> </ul>	 <p>Pebble ▼</p> <ul style="list-style-type: none"> <li> 2.0mm: 14871 604</li> <li> 2.5mm: 14872 604</li> <li> 2.5mm B<sub>fl</sub>: 14898 604*</li> <li> 3.8mm: 14892 604</li> <li> 4.4mm: 14881 604*</li> </ul>	 <p>Stone ▼</p> <ul style="list-style-type: none"> <li> 2.5mm: 14872 692</li> <li> 2.5mm B<sub>fl</sub>: 14898 692*</li> <li> 3.8mm: 14892 692</li> <li> 4.4mm: 14881 692*</li> </ul>	 <p>Aluminium ▼</p> <ul style="list-style-type: none"> <li> 2.0mm: 14871 672</li> <li> 2.5mm: 14872 672</li> <li> 2.5mm B<sub>fl</sub>: 14898 672*</li> <li> 4.4mm: 14881 672*</li> </ul>	 <p>Platinum ▼</p> <ul style="list-style-type: none"> <li> 2.5mm: 14872 684</li> <li> 2.5mm B<sub>fl</sub>: 14898 684*</li> <li> 3.8mm: 14892 684</li> <li> 4.4mm: 14881 684*</li> </ul>	 <p>Grey ▼</p> <ul style="list-style-type: none"> <li> 2.0mm: 14871 793</li> <li> 2.5mm: 14872 793</li> <li> 2.5mm B<sub>fl</sub>: 14898 793*</li> <li> 3.2mm: 14873 793</li> <li> 3.8mm: 14892 793</li> <li> 4.4mm: 14881 793*</li> </ul>	 <p>Graphite ▼</p> <ul style="list-style-type: none"> <li> 2.0mm: 14871 906</li> <li> 2.5mm: 14872 906</li> <li> 2.5mm B<sub>fl</sub>: 14898 906*</li> <li> 3.2mm: 14873 906</li> <li> 3.8mm: 14892 906</li> <li> 4.4mm: 14881 906*</li> </ul>	 <p>Storm ▼</p> <ul style="list-style-type: none"> <li> 2.0mm: 14871 702</li> <li> 2.5mm: 14872 702</li> <li> 2.5mm B<sub>fl</sub>: 14898 702*</li> <li> 3.8mm: 14892 702</li> <li> 4.4mm: 14881 702*</li> </ul>	 <p>Steel ▼</p> <ul style="list-style-type: none"> <li> 2.0mm: 14871 673</li> <li> 2.5mm: 14872 673</li> <li> 2.5mm B<sub>fl</sub>: 14898 673*</li> <li> 3.2mm: 14873 673</li> <li> 3.8mm: 14892 673</li> <li> 4.4mm: 14881 673*</li> </ul>	 <p>Zinc ▼</p> <ul style="list-style-type: none"> <li> 2.0mm: 14871 671</li> <li> 2.5mm: 14872 671</li> <li> 2.5mm B<sub>fl</sub>: 14898 771*</li> <li> 3.8mm: 14892 671</li> <li> 4.4mm: 14881 671*</li> </ul>
 <p>Night Owl ▼</p> <ul style="list-style-type: none"> <li> 2.5mm: 14872 917</li> <li> 2.5mm B<sub>fl</sub>: 14898 917*</li> <li> 3.8mm: 14892 917</li> <li> 4.4mm: 14881 917*</li> </ul>	 <p>Charcoal ▼</p> <ul style="list-style-type: none"> <li> 2.0mm: 14871 610</li> <li> 2.5mm: 14872 610</li> <li> 2.5mm B<sub>fl</sub>: 14898 610*</li> <li> 4.4mm: 14881 610*</li> </ul>	 <p>Smoke ▼</p> <ul style="list-style-type: none"> <li> 2.0mm: 14871 608</li> <li> 2.5mm: 14872 608</li> <li> 2.5mm B<sub>fl</sub>: 14898 608*</li> <li> 3.8mm: 14892 608</li> <li> 4.4mm: 14881 608*</li> </ul>	 <p>Concrete ▼</p> <ul style="list-style-type: none"> <li> 2.5mm: 14872 686</li> <li> 2.5mm B<sub>fl</sub>: 14898 686*</li> <li> 3.8mm: 14892 686</li> <li> 4.4mm: 14881 686*</li> </ul>	 <p>Pewter ▼</p> <ul style="list-style-type: none"> <li> 2.5mm: 14872 685</li> <li> 2.5mm B<sub>fl</sub>: 14898 685*</li> <li> 3.8mm: 14892 685</li> <li> 4.4mm: 14881 685*</li> </ul>	 <p>Ivory ▼</p> <ul style="list-style-type: none"> <li> 2.5mm: 14872 601</li> <li> 2.5mm B<sub>fl</sub>: 14898 601*</li> <li> 4.4mm: 14881 601*</li> </ul>	 <p>Ash ▼</p> <ul style="list-style-type: none"> <li> 2.0mm: 14871 704</li> <li> 2.5mm: 14872 704</li> <li> 2.5mm B<sub>fl</sub>: 14898 704*</li> <li> 4.4mm: 14881 704*</li> </ul>	 <p>Fog ▼</p> <ul style="list-style-type: none"> <li> 2.0mm: 14871 703</li> <li> 2.5mm: 14872 703</li> <li> 2.5mm B<sub>fl</sub>: 14898 703*</li> <li> 3.8mm: 14892 703</li> <li> 4.4mm: 14881 703*</li> </ul>		

Logistics Information

Grands Classiques ♥, 20 Veneto colours guaranteed in production until 2033

 (2.0mm)  
 (2.5mm) Available in rolls  
 (3.2mm) Rolls length: ≤321m

 Silencio  
 (3.8mm) Rolls length: ≤321m

 Acoustic  
 Cork  
 (4.4mm) Rolls length: ≤321m

\* On request.



VENETO xf<sup>2</sup>™

100% Linen











Page 474  
Coordinated accessories offer











Tiger Eye

LINOLEUM



Beiges

 Camel▼ 2.5mm: 14872 616 2.5mm B <sub>fl</sub> : 14898 616* 4.4mm: 14881 616*	 Sisal▼ 2.0mm: 14871 611 2.5mm: 14872 611 2.5mm B <sub>fl</sub> : 14898 611* 3.2mm: 14873 611 4.4mm: 14881 611*	 Ecru▼ 2.0mm: 14871 711 2.5mm: 14872 711 2.5mm B <sub>fl</sub> : 14898 711* 4.4mm: 14881 711*	 White 2.5mm: 14872 700 2.5mm B <sub>fl</sub> : 14898 700*	 Silk 2.0mm: 14871 625 2.5mm: 14872 625 2.5mm B <sub>fl</sub> : 14898 625* 3.8mm: 14892 625 4.4mm: 14881 625*
 100% linen	 Cork▼	 Azurite	 Burlap	 Taupe Dark
2.5mm: 14872 400 2.5mm B <sub>fl</sub> : 14898 400* 3.8mm: 14892 400 4.4mm: 14881 400*	2.0mm: 14871 679 2.5mm: 14872 679 2.5mm B <sub>fl</sub> : 14898 679* 4.4mm: 14881 679*	2.5mm: 14872 624 2.5mm B <sub>fl</sub> : 14898 624* 3.8mm: 14892 624 4.4mm: 14881 624*	2.0mm: 14871 911 2.5mm: 14872 911 2.5mm B <sub>fl</sub> : 14898 911* 4.4mm: 14881 911*	2.5mm: 14872 714 2.5mm B <sub>fl</sub> : 14898 714* 4.4mm: 14881 714*

 Tiger Eye	 Durango	 Neutral▼	 Sand	 Fossil
2.5mm: 14872 524 2.5mm B <sub>fl</sub> : 14898 524* 4.4mm: 14881 524*	2.5mm: 14872 121 2.5mm B <sub>fl</sub> : 14898 121* 4.4mm: 14881 121*	2.5mm: 14872 710 2.5mm B <sub>fl</sub> : 14898 710* 4.4mm: 14881 710*	2.5mm: 14872 622 2.5mm B <sub>fl</sub> : 14898 622* 4.4mm: 14881 622*	2.0mm: 14871 502 2.5mm: 14872 502 2.5mm B <sub>fl</sub> : 14898 502* 4.4mm: 14881 502*
 Citrine	 Chocolate	 Almond		
2.5mm: 14872 631 2.5mm B <sub>fl</sub> : 14898 631* 4.4mm: 14881 631*	2.5mm: 14872 632 2.5mm B <sub>fl</sub> : 14898 632* 3.8mm: 14892 632 4.4mm: 14881 632*	2.0mm: 14871 637 2.5mm: 14872 637 2.5mm B <sub>fl</sub> : 14898 637* 4.4mm: 14881 637*		

Logistics Information



























































Grands Classiques ▼, 20 Veneto colours guaranteed in production until 2033

-  (2.0mm) Available in rolls  
(2.5mm) Rolls length: ≤321m  
(3.2mm)
-  Silencio (3.8mm) Rolls length: ≤321m
-  Acoustic Cork (4.4mm) Rolls length: ≤321m












































\* On request.



Blues & Greens

 Deep Blue	 Ocean	 Hyacinth	 Blue Purple	 Lavender
 2.5mm: 14872 767  2.5mm B <sub>n</sub> : 14898 767*  4.4mm: 14881 767*	 2.5mm: 14872 665  2.5mm B <sub>n</sub> : 14898 665*  4.4mm: 14881 665*	 2.5mm: 14872 764  2.5mm B <sub>n</sub> : 14898 764*  3.8mm: 14892 764  4.4mm: 14881 764*	 2.5mm: 14872 762  2.5mm B <sub>n</sub> : 14898 762*  4.4mm: 14881 762*	 2.5mm: 14872 670  2.5mm B <sub>n</sub> : 14898 670*  4.4mm: 14881 670*
 Periwinkle	 Begonia	 Navy	 Horizon	 Mint
 2.5mm: 14872 761  2.5mm B <sub>n</sub> : 14898 761*  3.8mm: 14892 761  4.4mm: 14881 761*	 2.5mm: 14872 742  2.5mm B <sub>n</sub> : 14898 742*  4.4mm: 14881 742*	 2.5mm: 14872 688  2.5mm B <sub>n</sub> : 14898 688*  4.4mm: 14881 688*	 2.0mm: 14871 663  2.5mm: 14872 663  2.5mm B <sub>n</sub> : 14898 663*  3.2mm: 14873 663  4.4mm: 14881 663*	 2.5mm: 14872 651  2.5mm B <sub>n</sub> : 14898 651*  4.4mm: 14881 651*
 Absinthe	 Apple Green	 Grass		
 2.5mm: 14872 695  2.5mm B <sub>n</sub> : 14898 695*  3.8mm: 14892 695  4.4mm: 14881 695*	 2.5mm: 14872 754  2.5mm B <sub>n</sub> : 14898 754*  3.8mm: 14892 754  4.4mm: 14881 754*	 2.5mm: 14872 650  2.5mm B <sub>n</sub> : 14898 650*  4.4mm: 14881 650*		


Reds


 Eggshell	 Sunflower	 Coral	 Amber
 2.5mm: 14872 619  2.5mm B <sub>n</sub> : 14898 619*  3.8mm: 14892 619  4.4mm: 14881 619*	 2.5mm: 14872 628  2.5mm B <sub>n</sub> : 14898 628*  3.8mm: 14892 628  4.4mm: 14881 628*	 2.5mm: 14872 615  2.5mm B <sub>n</sub> : 14898 615*  4.4mm: 14881 615*	 2.5mm: 14872 612  2.5mm B <sub>n</sub> : 14898 612*  3.2mm: 14873 612  4.4mm: 14881 612*
 Salmon	 Carmine	 Copper	 Raspberry
 2.5mm: 14872 642  2.5mm B <sub>n</sub> : 14898 642*  4.4mm: 14881 642*	 2.5mm: 14872 645  2.5mm B <sub>n</sub> : 14898 645*  3.8mm: 14892 645  4.4mm: 14881 645*	 2.5mm: 14872 634  2.5mm B <sub>n</sub> : 14898 634*  3.8mm: 14892 634  4.4mm: 14881 634*	 2.5mm: 14872 740  2.5mm B <sub>n</sub> : 14898 740*  4.4mm: 14881 740*
 Terracotta			
 2.5mm: 14872 641  2.5mm B <sub>n</sub> : 14898 641*  3.2mm: 14873 641  3.8mm: 14892 641  4.4mm: 14881 641*			


\* On request.

Logistics Information

Grands Classiques ♥, 20 Veneto colours guaranteed in production until 2033

 (2.0mm)  
 (2.5mm) Available in rolls  
 (3.2mm) Rolls length: ≤321m

 Silencio (3.8mm) Rolls length: ≤321m


 Acoustic Cork (4.4mm) Rolls length: ≤321m



- Superior xf<sup>2</sup>™ surface protection for extreme mechanical and chemical toughness
- A discrete directional linear design tone on tone that can provide direction in corridors or open areas
- Design range of 8 colours, where the natural patterned beauty of linoleum meets modern style
- Perfect matching with Style Emme range

## STYLE ELLE xf<sup>2</sup>™

Ferro

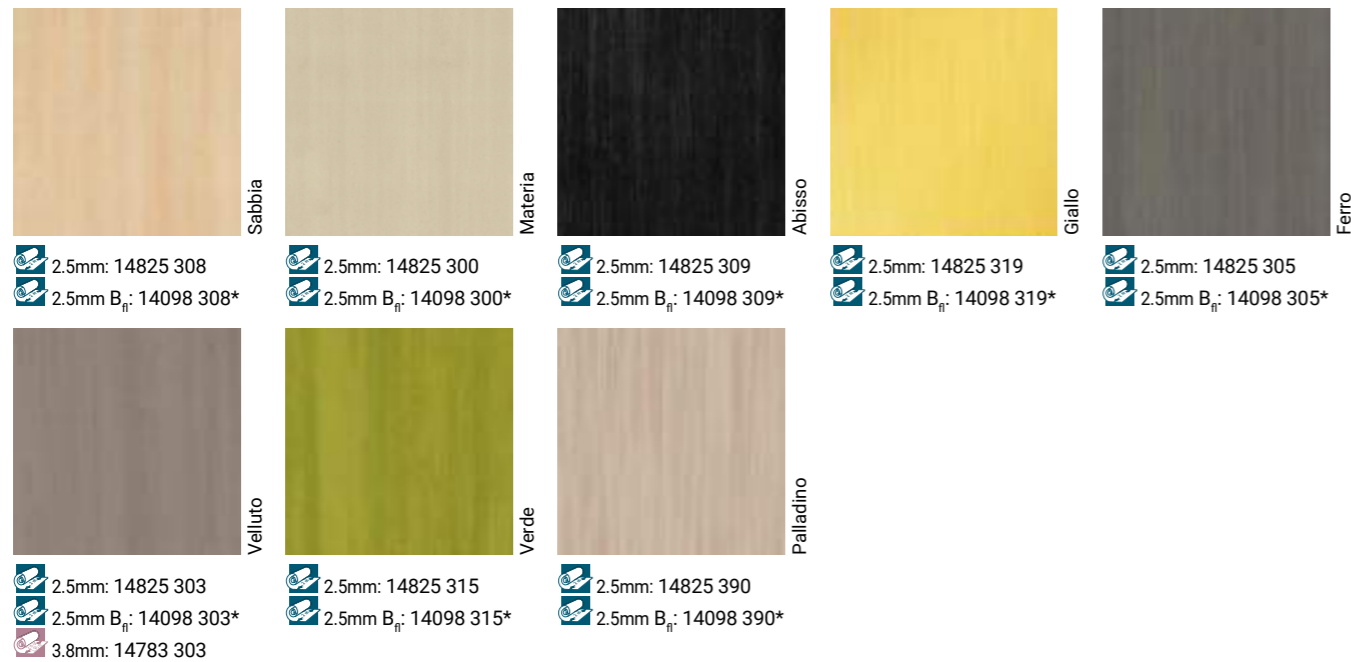

## TECHNICAL DATA

Classification	Standards	Style Elle xf <sup>2</sup> ™ 2.5mm	Style Elle xf <sup>2</sup> B <sub>fl</sub> 2.5mm (ON REQUEST)	Silencio xf <sup>2</sup> ™ 3.8mm
Type of floor covering	ISO 24011 (EN 548) EN 686	One single layer calendared linoleum on jute backing.		- Linoleum on a foam backing
Classification	ISO 10874 domestic commercial light industrial	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 33 41
<b>Characteristics</b>				
Surface Treatment	-	xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™
Total thickness	ISO 24346	2.50mm	2.50mm	3.80mm
Total weight	ISO 23997	ca. 3 000g/m <sup>2</sup>	ca. 3 200g/m <sup>2</sup>	ca. 3 450g/m <sup>2</sup>
<b>Technical performance</b>				
Reaction to fire	EN 13501-1	C <sub>s1</sub>	B <sub>s1</sub>	C <sub>s1</sub>
Residual indentation	EN ISO 24343-1 Standard requirements Best measured value	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.30 mm ca. 0.20 mm
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30
Flexibility	ISO 24344 Method A	≤ 30mm	≤ 30mm	≤ 30mm
Castor chair	ISO 4918	Suitable for office chairs with castors type W (Norm EN 12529)		
Static electrical propensity	EN 1815	< 2kV	< 2kV	< 2kV
Chemical resistance	ISO 26987	Resistant to dilute acids, oils, fats, current solvents and alkalis		
Thermal resistance Underfloor heating	ISO 10456	0.015m <sup>2</sup> K/W Suitable	0.015m <sup>2</sup> K/W Suitable	0.040m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6
Impact sound reduction	EN ISO 10140-3	6dB	6dB	18dB
Impact sound reduction with Elafono**	EN ISO 717-2	14dB	14dB	Not applicable
Acoustic improvement	NF S31-074	Class C (L <sub>n,e,w</sub> <85dB)	Class C (L <sub>n,e,w</sub> <85dB)	Class A (L <sub>n,e,w</sub> <65dB)
Determination of antibacterial activity	ISO 22196	Naturally bactericidal (Bacteria mix- Ecoli and MRSA)		
Odor test requirement of emission class M1	EN ISO 16000-28 i. A., VDI4302	Meets requirement		
<b>CE Marking</b>				
DoP number	EN 14041	0200-0031-DoP-2013-07	0200-0014-DoP-2013-07	0200-0027-DoP-2013-07

\*\*Elafono: 2.0 mm traditional, 100% natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -15dB, depending on the product). Available in rolls ≤32 x 2m.

	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
Style Elle xf <sup>2</sup> ™		Available in rolls (2.5mm) Rolls length: ≤321m		
Silencio xf <sup>2</sup> ™		Silencio (3.8mm) Rolls length: ≤321m		




















- Superior xf<sup>2</sup>™ surface protection for extreme mechanical and chemical toughness
- A discrete marbling tone on tone as a practical solution for maintaining a high quality appearance with a lasting impression of cleanliness.
- Perfect matching with Style Elle range
- Design range of 13 colours where the natural patterned beauty of linoleum meets modern style

## STYLE EMME xf<sup>2</sup>™

Mokka














				
Sabbia	Materia	Abisso	Giallo	Ferro
2.5mm: 14835 208 2.5mm B <sub>II</sub> : 14088 208*	2.5mm: 14835 200 2.5mm B <sub>II</sub> : 14088 200*	2.5mm: 14835 209 2.5mm B <sub>II</sub> : 14088 209* 3.8mm: 14782 209	2.5mm: 14835 219 2.5mm B <sub>II</sub> : 14088 219* 3.8mm: 14782 219	2.5mm: 14835 205 2.5mm B <sub>II</sub> : 14088 205* 3.8mm: 14782 205
				
Cemento	Asfalto	Velluto	Cenere	Verde
2.5mm: 14835 202 2.5mm B <sub>II</sub> : 14088 202* 3.8mm: 14782 202	2.5mm: 14835 207 2.5mm B <sub>II</sub> : 14088 207*	2.5mm: 14835 203 2.5mm B <sub>II</sub> : 14088 203* 3.8mm: 14782 203	2.5mm: 14835 201 2.5mm B <sub>II</sub> : 14088 201*	2.5mm: 14835 215 2.5mm B <sub>II</sub> : 14088 215* 3.8mm: 14782 215
				
Jaipur pink	Blue Nile	Cranberry		
2.5mm: 14835 221 2.5mm B <sub>II</sub> : 14088 221* 3.8mm: 14782 221	2.5mm: 14835 222 2.5mm B <sub>II</sub> : 14088 222* 3.8mm: 14782 222	2.5mm: 14835 223 2.5mm B <sub>II</sub> : 14088 223*		

\* On request.

## TECHNICAL DATA

Classification	Standards	Style Emme xf <sup>2</sup> ™ 2.5mm	Style Emme xf <sup>2</sup> B <sub>II</sub> 2.5mm (ON REQUEST)	Silencio xf <sup>2</sup> ™ 3.8mm
Type of floor covering	ISO 24011 (EN 548) EN 686	One single layer calendared linoleum on jute backing.		
Classification	ISO 10874 domestic commercial light industrial	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 33 41
<b>Characteristics</b>				
Surface Treatment	-	xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™
Total thickness	ISO 24346	2.50mm	2.50mm	3.80mm
Total weight	ISO 23997	ca. 3 000g/m <sup>2</sup>	ca. 3 200g/m <sup>2</sup>	ca. 3 450g/m <sup>2</sup>
<b>Technical performance</b>				
Reaction to fire	EN 13501-1	C <sub>fl</sub> s1	B <sub>fl</sub> s1	C <sub>fl</sub> s1
Residual indentation	EN ISO 24343-1 Standard requirements Best measured value	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.30 mm ca. 0.20 mm
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30
Flexibility	ISO 24344 Method A	≤ 30mm	≤ 30mm	≤ 30mm
Castor chair	ISO 4918	Suitable for office chairs with castors type W (Norm EN 12529)		
Static electrical propensity	EN 1815	< 2kV	< 2kV	< 2kV
Chemical resistance	ISO 26987	Resistant to dilute acids, oils, fats, current solvents and alkalis		
Thermal resistance Underfloor heating	ISO 10456	0.015m <sup>2</sup> K/W Suitable	0.015m <sup>2</sup> K/W Suitable	0.040m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6
Impact sound reduction	EN ISO 10140-3	6dB	6dB	18dB
Impact sound reduction with Elafono**	EN ISO 717-2	14dB	14dB	Not applicable
Acoustic improvement	NF S31-074	Class C (L <sub>n,e,w</sub> <85dB)	Class C (L <sub>n,e,w</sub> <85dB)	Class A (L <sub>n,e,w</sub> < 65dB)
Determination of antibacterial activity	ISO 22196	Naturally bactericidal (Bacteria mix- Ecoli and MRSA)		
Odor test requirement of emission class M1	EN ISO 16000-28 i. A., VDI4302	Meets requirement		
<b>CE Marking</b>				
DoP number	EN 14041	0200-0034-DoP-2013-07	0200-0014-DoP-2013-07	0200-0027-DoP-2013-07

\*\*Elafono: 2.0 mm traditional, 100% natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -15dB, depending on the product). Available in rolls ≤32 x 2m.











	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
Style Emme xf <sup>2</sup> ™		Available in rolls (2.5mm) Rolls length: ≤321m		     
Silencio xf <sup>2</sup> ™		Silencio (3.8mm) Rolls length: ≤321m		    



•NEW•

- Trentino is a collection mixing modernity and tradition.
- Trentino offers a subtle semi-directional pattern, made of 3 colours: a main uni colour, with two contrasting tones, giving the design depth.
- Trentino benefits of the superior xf<sup>2</sup> surface protection for extreme mechanical and chemical protection.















# TRENTINO xf<sup>2</sup>™

				
Salt	Cloud	Grey pepper	Starry sky	Grapefruit
2.5mm: 14502 501 2.5mm B <sub>fl</sub> : 14128 501* 3.8mm: 14124 501*	2.5mm: 14502 505 2.5mm B <sub>fl</sub> : 14128 505* 3.8mm: 14124 505*	2.5mm: 14502 503 2.5mm B <sub>fl</sub> : 14128 503* 3.8mm: 14124 503*	2.5mm: 14502 509 2.5mm B <sub>fl</sub> : 14128 509* 3.8mm: 14124 509*	2.5mm: 14502 530 2.5mm B <sub>fl</sub> : 14128 530* 3.8mm: 14124 530*
				
Pollen	Lime	Moss	Curaçao	Blueberry
2.5mm: 14502 531 2.5mm B <sub>fl</sub> : 14128 531* 3.8mm: 14124 531*	2.5mm: 14502 551 2.5mm B <sub>fl</sub> : 14128 551* 3.8mm: 14124 551*	2.5mm: 14502 552 2.5mm B <sub>fl</sub> : 14128 552* 3.8mm: 14124 552*	2.5mm: 14502 560 2.5mm B <sub>fl</sub> : 14128 560* 3.8mm: 14124 560*	2.5mm: 14502 561 2.5mm B <sub>fl</sub> : 14128 561* 3.8mm: 14124 561*

# TECHNICAL DATA

Classification	Standards	Trentino xf <sup>2</sup> ™ 2.5mm	Trentino xf <sup>2</sup> B <sub>fl</sub> 2.5mm (ON REQUEST)	Silencio xf <sup>2</sup> ™ 3.8mm (ON REQUEST)
Type of floor covering	ISO 24011 (EN 548) EN 686	One single layer calendared linoleum on jute backing		
Classification	ISO 10874 domestic commercial light industrial	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 33 41
<b>Characteristics</b>				
Surface Treatment		xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™
Total thickness	ISO 24346	2.50mm	2.50mm	3.80mm
Total weight	ISO 23997	ca. 3 000g/m <sup>2</sup>	ca. 3 200g/m <sup>2</sup>	ca. 3 450g/m <sup>2</sup>
<b>Technical performance</b>				
Reaction to fire	EN 13501-1	C <sub>fl</sub> s1	B <sub>fl</sub> s1	C <sub>fl</sub> s1
Residual indentation	EN ISO 24343-1 Standard requirements Best measured value	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.30 mm ca. 0.20 mm
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30
Flexibility	ISO 24344 Method A	≤ 30mm	≤ 30mm	≤ 30mm
Castor chair	ISO 4918	Suitable for office chairs with castors type W (Norm EN 12529)		
Static electrical propensity	EN 1815	< 2kV	< 2kV	< 2kV
Chemical resistance	ISO 26987	Resistant to dilute acids, oils, fats, current solvents and alkalis		
Thermal resistance Underfloor heating	ISO 10456	0.015m <sup>2</sup> K/W Suitable	0.015m <sup>2</sup> K/W Suitable	0.040m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6
Impact sound reduction		6dB	6dB	18dB
Impact sound reduction with Elafono**	EN ISO 10140-3 EN ISO 717-2	14dB	14dB	Not applicable
Acoustic improvement	NF S31-074	Class C (L <sub>n,e,w</sub> <85dB)	Class C (L <sub>n,e,w</sub> <85dB)	Class A (L <sub>n,e,w</sub> <65dB)
Determination of antibacterial activity	ISO 22196	Naturally bactericidal (Bacteria mix- Ecoli and MRSA)		
Odor test requirement of emission class M1	EN ISO 16000-28 i. A., VDI4302	Meets requirement		
<b>CE Marking</b>				
DoP number	EN 14041	0200-0001-DoP-2013-07	0200-0014-DoP-2013-07	0200-0027-DoP-2013-07

\*\*Elafono: 2.0 mm traditional, 100% natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -15dB, depending on the product). Available in rolls ≤32 x 2m.

	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
Trentino xf <sup>2</sup> ™		 Available in rolls (2.5mm) Rolls length: ≤32lm		    
Trentino Silencio xf <sup>2</sup> ™		 Silencio (3.8mm) Rolls length: ≤32lm		    

\* On request.





- Superior xf<sup>2</sup>™ surface protection for extreme mechanical and chemical toughness
- Plain design with deep and radiant colours
- To be easily combined with any other linoleum pattern

## ETRUSCO xf<sup>2</sup>™

Silver

Black	Silver	Beige	Red Berlin	Red
2.5mm: 14877 098 2.5mm B <sub>n</sub> : 14078 098* 3.8mm: 14894 098	2.5mm: 14877 003 2.5mm B <sub>n</sub> : 14078 003* 3.8mm: 14894 003	2.5mm: 14877 002 2.5mm B <sub>n</sub> : 14078 002* 3.8mm: 14894 002	2.5mm: 14877 094 2.5mm B <sub>n</sub> : 14078 094*	2.5mm: 14877 041 2.5mm B <sub>n</sub> : 14078 041*
Orange	Yellow	Anise	Rainforest	Cyan
2.5mm: 14877 037 2.5mm B <sub>n</sub> : 14078 037*	2.5mm: 14877 036 2.5mm B <sub>n</sub> : 14078 036*	2.5mm: 14877 095 2.5mm B <sub>n</sub> : 14078 095*	2.5mm: 14877 053 2.5mm B <sub>n</sub> : 14078 053*	2.5mm: 14877 061 2.5mm B <sub>n</sub> : 14078 061*
Iris	Emerald	Elephant	Chinchilla	Mouse
2.5mm: 14877 048 2.5mm B <sub>n</sub> : 14078 048*	2.5mm: 14877 054 2.5mm B <sub>n</sub> : 14078 054*	2.5mm: 14877 005 2.5mm B <sub>n</sub> : 14078 005*	2.5mm: 14877 007 2.5mm B <sub>n</sub> : 14078 007*	2.5mm: 14877 008 2.5mm B <sub>n</sub> : 14078 008*
Macaw				
2.5mm: 14877 044 2.5mm B <sub>n</sub> : 14078 044*				

\* On request.

## TECHNICAL DATA

Classification	Standards	Etrusco xf <sup>2</sup> ™ 2.5mm	Etrusco xf <sup>2</sup> B <sub>n</sub> 2.5mm (ON REQUEST)	Silencio xf <sup>2</sup> ™ 3.8mm
Type of floor covering	ISO 24011 (EN 548) EN 686	One single layer calendered linoleum on jute backing.		
Classification	ISO 10874 domestic commercial light industrial	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 33 41
<b>Characteristics</b>				
Surface Treatment		xf <sup>2</sup> ™	xf <sup>2</sup> ™	xf <sup>2</sup> ™
Total thickness	ISO 24346	2.50mm	2.50mm	3.80mm
Total weight	ISO 23997	ca. 3 000g/m <sup>2</sup>	ca. 3 200g/m <sup>2</sup>	ca. 3 450g/m <sup>2</sup>
<b>Technical performance</b>				
Reaction to fire	EN 13501-1	C <sub>n</sub> s1	B <sub>n</sub> s1	C <sub>n</sub> s1
Residual indentation	EN ISO 24343-1 Standard requirements Best measured value	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.30 mm ca. 0.20 mm
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30
Flexibility	ISO 24344 Method A	≤ 30mm	≤ 30mm	≤ 30mm
Castor chair	ISO 4918	Suitable for office chairs with castors type W (Norm EN 12529)		
Static electrical propensity	EN 1815	< 2kV	< 2kV	< 2kV
Chemical resistance	ISO 26987	Resistant to dilute acids, oils, fats, current solvents and alkalis		
Thermal resistance Underfloor heating	ISO 10456	0.015m <sup>2</sup> K/W Suitable	0.015m <sup>2</sup> K/W Suitable	0.040m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6
Impact sound reduction	EN ISO 10140-3	6dB	6dB	18dB
Impact sound reduction with Elafono**	EN ISO 717-2	14dB	14dB	Not applicable
Acoustic improvement	NF S31-074	Class C (L <sub>n,e,w</sub> <85dB)	Class C (L <sub>n,e,w</sub> <85dB)	Class A (L <sub>n,e,w</sub> < 65dB)
Determination of antibacterial activity	ISO 22196	Naturally bactericidal (Bacteria mix- Ecoli and MRSA)		
Odor test requirement of emission class M1	EN ISO 16000-28 i. A., VDI4302	Meets requirement		
<b>CE Marking</b>				
DoP number	EN 14041	0200-0020-DoP-2013-07	0200-0014-DoP-2013-07	0200-0027-DoP-2013-07

\*\*Elafono: 2.0 mm traditional, 100% natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -15dB, depending on the product). Available in rolls ≤32 x 2m.

	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
Etrusco xf <sup>2</sup> ™		Available in rolls (2.5mm) Rolls length: ≤321m		
Silencio xf <sup>2</sup> ™		Silencio (3.8mm) Rolls length: ≤321m		







# VENETO SICURO xf<sup>2</sup>™ R10

- Superior xf<sup>2</sup>™ surface protection for extreme mechanical and chemical toughness
- R10 secure grip combined with the ease of cleaning of xf<sup>2</sup>™
- 60 colours classical marbled design available on request
- 20 colours are among the 20 Grands Classiques, granted in production until 2033♥

# TECHNICAL DATA

Classification	Standards	Veneto Sicuro xf <sup>2</sup> ™ R10* 2.5mm
Type of floor covering	ISO 24011 (EN 548)	One single layer calendared linoleum on jute backing.
Classification	ISO 10874 domestic commercial light industrial	Classes: 23 34 43
<b>Characteristics</b>		
Surface Treatment		xf <sup>2</sup> ™
Total thickness	ISO 24346	2.50mm
Total weight	ISO 23997	ca. 3 000g/m <sup>2</sup>
<b>Technical performance</b>		
Reaction to fire	EN 13501-1	C <sub>fl</sub> s1
Residual indentation	EN ISO 24343-1 Standard requirements Best measured value	≤ 0.15 mm ca. 0.08 mm
Slip resistance	DIN 51130 EN 13893	R10 DS: ≥ 0.30
Flexibility	ISO 24344 Method A	≤ 30mm
Castor chair	ISO 4918	Suitable for office chairs with castors type W (Norm EN 12529)
Static electrical propensity	EN 1815	< 2kV
Chemical resistance	ISO 26987	Resistant to dilute acids, oils, fats, current solvents and alkalis
Thermal resistance Underfloor heating	ISO 10456	0.015m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6
Impact sound reduction	EN ISO 10140-3	6dB
Impact sound reduction with Elafono**	EN ISO 717-2	14dB
Acoustic improvement	NF S31-074	Class C (Ln,e,w<85dB)
Determination of antibacterial activity	ISO 22196	Naturally bactericidal (Bacteria mix- Ecoli and MRSA)
Odor test requirement of emission class M1	EN ISO 16000-28 i. A., VDI4302	Meets requirement
<b>CE Marking</b>		
DoP number	EN 14041	0200-0020-DoP-2013-07

\*\*Elafono: 2.0 mm traditional, 100% natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -15dB, depending on the product). Available in rolls ≤32 x 2m.



	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
Veneto Sicuro xf <sup>2</sup> ™ R10		<b>Grands Classiques ♥, 20 Veneto colours guaranteed in production until 2033</b>  Available in rolls (2.5mm) Rolls length: ≤321m		

Concrete



# VENETO SICURO xf<sup>2</sup>™ R10

Page 474  
Coordinated accessories offer

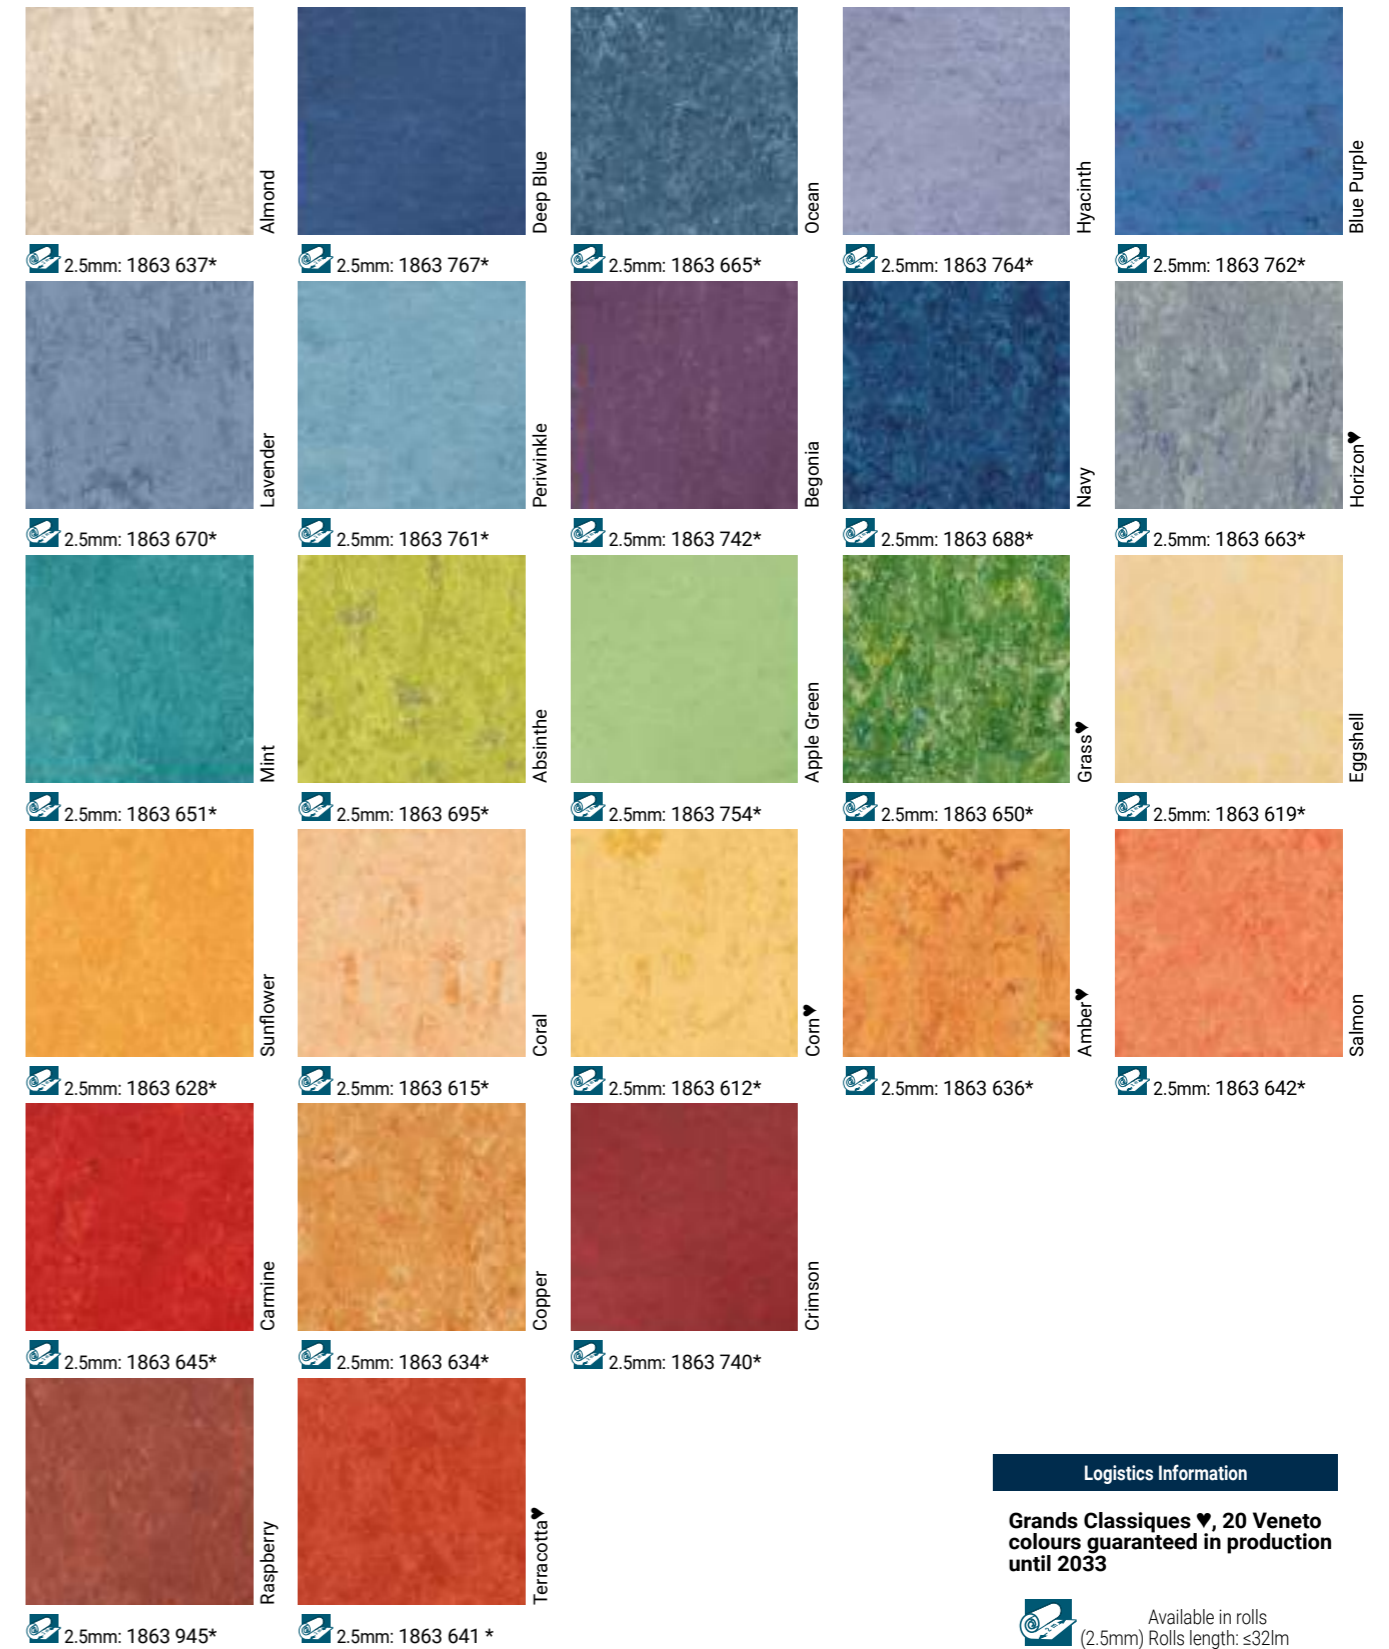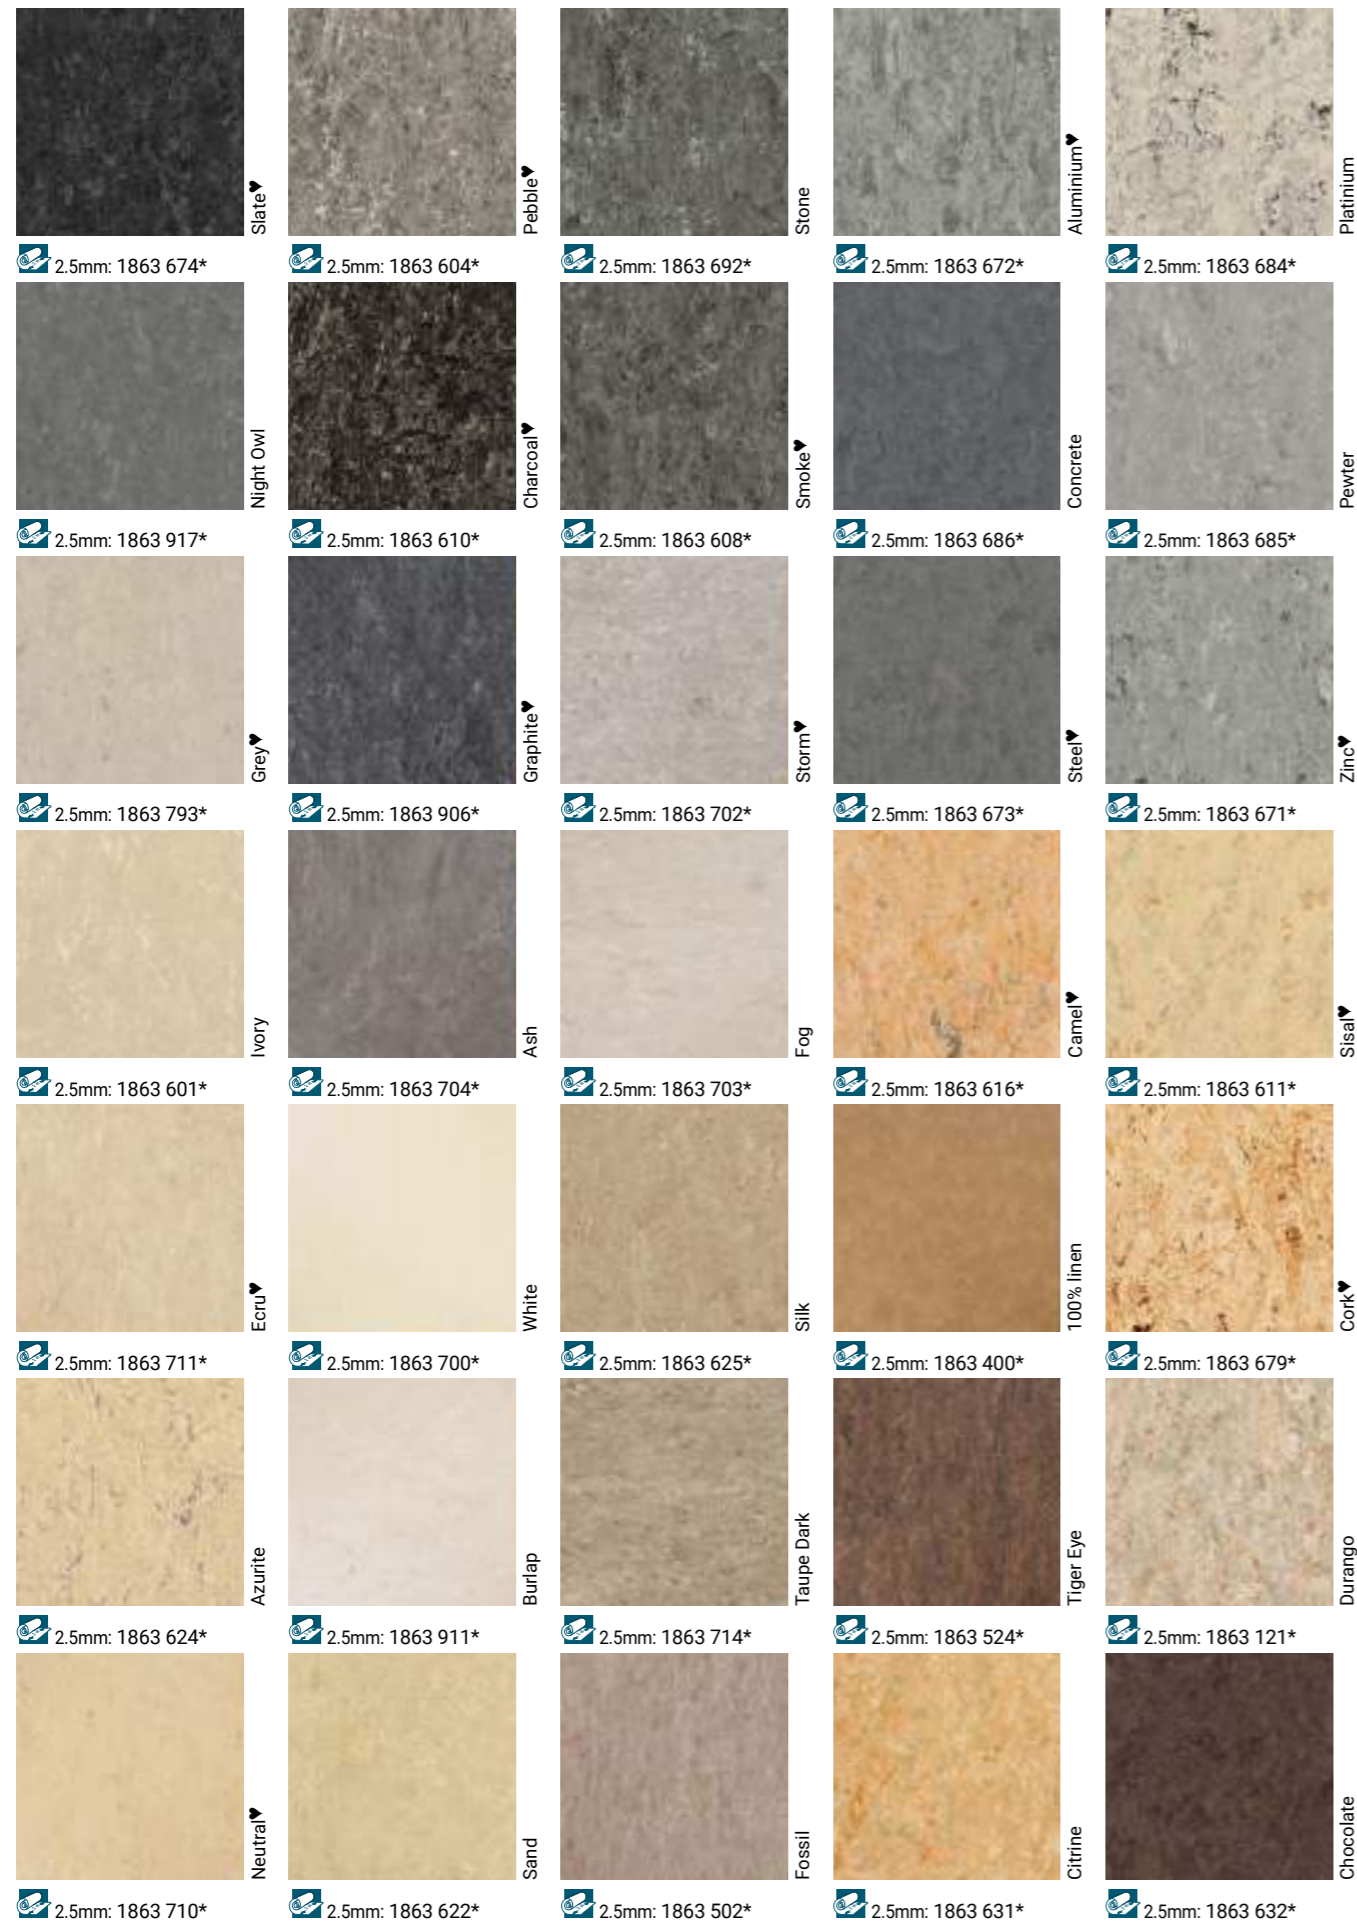

\* On request.

LINOLEUM




Logistics Information

Grands Classiques ♥, 20 Veneto colours guaranteed in production until 2033

Available in rolls (2.5mm) Rolls length: ≤321m



The linoleum collection with a traditional factory-applied acrylic finish that is non-permanent, to be used when a non-PU surface protection is required.

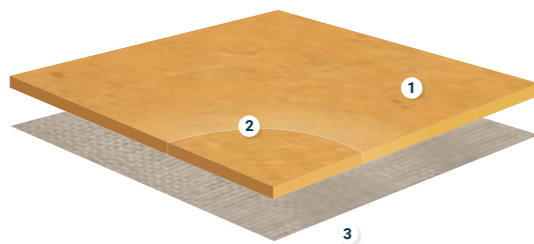

**VENETO AND ORIGINALE ESSENZA**

- 1 Non permanent factory-applied acrylic finish
- 2 Pure linoleum stable design throughout product lifetime
- 3 Jute backing 100% natural support

**SENSORIAL BENEFITS**

- Natural look
- 29 colours in the classic Veneto marbled design
- 20 colours feature in the Grands Classiques♥ range, guaranteed to remain in production until 2033
- 6 colours, in two designs, for the ORIGINALE range, with with vegetal pigments like charcol and walnut hull.
- Matching accessories, including multicolour welding rods for Grands Classiques

**FUNCTIONAL BENEFITS**

- Ready to walk on: no initial wax or polish needed
- Gloss level adjustable by polishing
- Naturally bactericidal

**ENVIRONMENTAL BENEFITS**

- Natural, recyclable flooring made from sustainable materials
- Contributes to better indoor air quality (FloorScore® certified)

**TECHNICAL OVERVIEW**

Classification	Standards	Veneto Essenza 2.5mm	Originale Minerale Essenza 2.5mm	Originale Vegetale Essenza 2.5mm
Type of floor covering	ISO 24011 (EN 548)	One single layer calendered linoleum on jute backing.		
Classification	ISO 10874 domestic commercial light industrial		Classes: 23 34 43	
<b>Characteristics</b>				
Surface Treatment			Essenza	
Total thickness	ISO 24346		2.5mm	
Total weight	ISO 23997		ca. 3 000g/m <sup>2</sup>	
<b>Technical performance</b>				
Reaction to fire	EN 13501-1		C <sub>f</sub> s1	
Residual indentation	EN ISO 24343-1 Standard requirements Best measured value		≤ 0.15 mm ca. 0.08 mm	
Slip resistance	DIN 51130 EN 13893		R9 DS: ≥ 0.30	
Flexibility	ISO 24344 Method A		≤ 30mm	
Castor chair	ISO 4918		Suitable for office chairs with castors type W (Norm EN 12529)	
Static electrical propensity	EN 1815		< 2kV	
Chemical resistance	ISO 26987		Resistant to dilute acids,oils, fats, current solvents and alkalis	
Thermal resistance Underfloor heating	ISO 10456		0.015m <sup>2</sup> K/W Suitable	
Light fastness	EN ISO 105-B02 Method 3		≥ 6	
Impact sound reduction			6dB	
Impact sound reduction with Elafono**	EN ISO 10140-3 EN ISO 717-2		14dB	
Acoustic improvement	NF S31-074		Class C (L <sub>n,e,w</sub> < 85dB)	
Determination of antibacterial activity	ISO 22196		Naturally bactericidal (Bacteria mix - EColi and MRSA)	
Odor test requirement of emission class M1	EN ISO 16000-28 i. A., VDI4302		Meets requirement	
Colours			29 (Veneto) 3 (Originale Vegetale) 3 (Originale Minerale)	
Form of delivery	EN ISO 24341		≤ 32 x 2 m	
<b>CE Marking</b>				
DoP number	EN 14041		0200-0011-DoP-2013-07	

\*\*Elafono: 2.0 mm traditional, 100% natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -15dB, depending on the product). Available in rolls ≤32 x 2m.

	Surface Treatment	Logistics Information	Laying direction	Sustainability credentials
Veneto Essenza	Essenza Acrylic finish	Grands Classiques ♥, 20 Veneto colours guaranteed in production until 2033	↑↑	
Originale Minerale Essenza				
Originale Vegetale Essenza				

Product certification	International certification	Factory certification



- Ready to walk on: no initial wax or polish needed
- Non-PU surface protection
- Gloss level adjustable by polishing
- Selection from the classical marbled design
- Veneto Essenza 100% linen is the real colour of linoleum, as made without the use of pigments. Veneto Essenza 100% linen perfectly match with the Originale Essenza range and it is also C2C Gold certified


# VENETO ESSENZA

Zinc

**Page 474**  
Coordinated accessories offer

### Logistics Information
















**Grands Classiques ♥, 20 Veneto colours guaranteed in production until 2033**















 Available in rolls (2.5mm) Rolls length: ≤321m



Aluminium

LINOLEUM

 Pebble ♥ 2.5mm: 1805 604	 Smoke ♥ 2.5mm: 1805 608	 Charcoal ♥ 2.5mm: 1805 610	 Camel ♥ 2.5mm: 1805 616	 Zinc ♥ 2.5mm: 1805 671
 Aluminium ♥ 2.5mm: 1805 672	 Steel ♥ 2.5mm: 1805 673	 Slate ♥ 2.5mm: 1805 674	 Cork ♥ 2.5mm: 1805 679	 Storm ♥ 2.5mm: 1805 702
 Sisal ♥ 2.5mm: 1805 611	 Neutral ♥ 2.5mm: 1805 710	 Ecru ♥ 2.5mm: 1805 711	 Grey ♥ 2.5mm: 1805 793	 Graphite ♥ 2.5mm: 1805 906

 Corn ♥ 2.5mm: 1805 612	 Sunflower ♥ 2.5mm: 1805 628	 Amber ♥ 2.5mm: 1805 636	 Terracotta ♥ 2.5mm: 1805 641	 Raspberry ♥ 2.5mm: 1805 945
 Horizon ♥ 2.5mm: 1805 663	 Ocean ♥ 2.5mm: 1805 665	 Lavender ♥ 2.5mm: 1805 670	 Deep Blue ♥ 2.5mm: 1805 767	
 Absinthe ♥ 2.5mm: 1805 695	 Apple Green ♥ 2.5mm: 1805 754	 Grass ♥ 2.5mm: 1805 650	 Eggshell ♥ 2.5mm: 1805 619	 100% linen ♥ 2.5mm: 1805 400

•NEW•

- The only linoleum Cradle to Cradle Gold certified
- About 100% natural composition
- Originale is offered in two designs: Minerale which is a marbled soft design with a warm linoleum effect and Vegetale which is a linear design close to plant aspects, like leaf fibres.
- the colours are created using vegetal pigments like charcoal and walnut hull
- Also available on demand with xf<sup>2</sup> surface protection (C2C Silver)
- Originale range perfectly match with Veneto 100% linen reference (1805400).



# ORIGINALE ESSENZA

Vegetale - Chesnut

Page 474  
Coordinated accessories offer



LINOLEUM

## Minerale



Basalt

2.5mm: 14042 430



Clay

2.5mm: 14042 431



Tempora

2.5mm: 14042 432

## Vegetale



Nutmeg

2.5mm: 14032 450



Chestnut

2.5mm: 14032 451



Walnut

2.5mm: 14032 452



### Logistics Information

Available in rolls  
(2.5mm) Rolls length: ~321m



# OUR SELECTION OF ACCESSORIES FOR LINOLEUM



1

## Set-in skirting

Preformed skirting made of linoleum, welded to the floor covering and glued to the wall to ensure easy to clean and hygienic result.

See p. 479 for detailed info



2

## LinoWall

Protects the wall from impacts and decorates the wall.

### Cap

Provides a perfect finish and protects the edge of the wall covering.

See p. 494 for detailed info



3

## Transition profile

TMT  
Aluminium profile used at doorstep to join different floorings.

See p. 485 for detailed info



4

## Set-on skirting

Tailor-made following the colour of the floor and resistant to shocks.

See p. 479 for detailed info




5

## Floorcraft

We offer a dedicated Floorcraft Service to create unique flooring concepts through highlighting visual inlays, colourways, zoning and directional design.

See p. 500 for detailed info

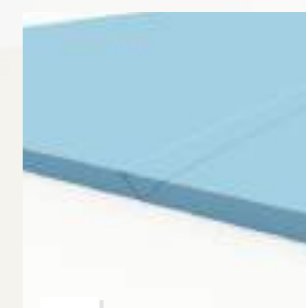


6

## Welding rod

Secures the junction between 2 rolls of flooring or wall and floor coverings.

See p. 474 for detailed info

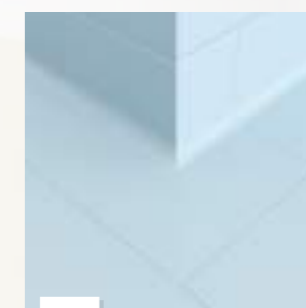

7

## Preformed Corner

Welded to the floor covering and glued to the wall. Shock resistant & watertight.

See p. 477 for detailed info

