

HOMOGENEOUS  
COMPACT VINYL

# iQ Eminent



## Specification

iQ Eminent is the result of good thinking. iQ Eminent combines sophisticated non-directional designs and outstanding flexibility. The iQ maintenance properties provides extreme durability and the best life cycle cost on the market. The range is suitable in commercial heavy traffic areas such as healthcare, education, retail, offices etc. iQ Eminent is produced with phthalate-free technology and VOC emissions 100 times lower than the strictest standards in Europe contributing to improved indoor environment and air quality.

CERTIFICATION & CLASSIFICATION	STANDARDS	iQ Eminent
Type of floor covering	ISO 10581 - EN 649	Homogeneous single layered vinyl flooring.
Binder content	ISO 10581	Type 1.
CE certification	EN 14041	Yes
Classification	ISO 10874 - EN 685	Commercial: 34 Industrial: 43
ISO certification		Ronneby ISO 9001/Ronneby ISO 14001

TECHNICAL CHARACTERISTICS	STANDARDS	iQ Eminent
iQ PUR		Yes
Total thickness	ISO 24346 - EN 428	2.0 mm
Total weight/m <sup>2</sup>	ISO 23997 - EN 430	2850 g
Form of delivery	ISO 24341 - EN 426	Sheet (rolls)
		Approx. 23 lineal metres x 200 cm Product no. 21030 _ _ _ 3 digit colour number

TECHNICAL PERFORMANCES	STANDARDS	iQ Eminent
Reaction to fire	ISO AS 9239-1	Critical radiant flux 10.2kW/m <sup>2</sup> Smoke 213%,min
Total VOC emissions	AgBB/DIBt Indoor air quality FloorScore RTS emission class	≤ 10 µg/m <sup>3</sup> (after 28 days) Platinum SCS certified M1
Clean room	ISO 14644-1 ASTM F24 F51	ISO class 4 Class A
Bacteria resistance	ISO 846 Part C	Does not favour growth
Ease of decontamination	ISO 8690 – DIN 25415	Excellent
Chemical resistance	ISO 26987 - EN 423	Excellent
Slip resistance	AS 4586/DIN 51130*	R10/P4
Wet room approval	EN 13553 Annex A GBR approval system	Watertight Certified
Abrasion	EN 660:Part 2	Group T: ≤ 2.0 mm <sup>3</sup>
Residual indentation	ISO 24343-1 – EN 433	Required value: ≤ 0.10 mm Average measured value: 0.02 mm
Dimensional stability	ISO 23999 - EN 434	≤ 0.40% for rolls
Castor chair test	ISO 4918 - EN 425	Suitable
Flexibility	ISO 24344 – EN 435	Pass
Static electrical discharge	EN 1815	< 2 kV
Underfloor heating		Suitable - max. 27°C
Thermal resistance	EN 12667	Approx. 0.01 m <sup>2</sup> K/W
Light fastness	EN ISO 105-B02	≥ level 6
Seam strength	EN 684	Average value: ≥ 240 N/50mm Individual values: ≥ 180 N/50mm
Colours		34

\*DIN 51130:2004 and 2010 is equivalent to Appendix D AS 4586:2013

The above information is subject to modification for the benefit of further improvement. (04/16).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



Matching Weld Rods

Product No.	Welding Rod Plain	Welding Rod Multicolour	Product No.	Welding Rod Plain	Welding Rod Multicolour	Product No.	Welding Rod Plain	Welding Rod Multicolour	Product No.	Welding Rod Plain	Welding Rod Multicolour	Product No.	Welding Rod Plain only
125	1287 411	1290 242	132	1287 624	1290 245	139	1287 466	1290 252	146	1287 621	1290 259	153	1289 316
126	1287 446	1290 243	133	1287 533	1290 131	140	1287 041	1290 253	147	1287 622	1290 260	154	1292 859
127	1287 027	1290 022	134	1287 256	1290 247	141	1292 611	1290 254	148	1287 623	1290 261	155	1287 626
128	1292 383	1290 170	135	1287 427	1290 248	142	1292 371	1290 255	149	1287 618	1290 238	156	1287 427
129	1294 727	1290 087	136	1287 012	1290 249	143	1287 625	1290 256	150	1287 619	1290 239	157	1287 627
130	1287 340	1290 155	137	1287 256	1290 250	144	1287 635	1290 257	151	1287 579	1290 240	158	1287 628
131	1291 214	1290 244	138	1287 160	1290 188	145	1287 636	1290 258	152	1287 463	1290 241		

For all your Tarkett specification needs visit [TarkoSpec.com.au](http://TarkoSpec.com.au)

For more information contact Tarkett on 1300 851 484 or email [customerservice@tarkett.com](mailto:customerservice@tarkett.com)

Tarkett Australia Pty Ltd. 16 Anella Avenue, Castle Hill, NSW 2154



THE ULTIMATE  
FLOORING EXPERIENCE



THE ULTIMATE  
FLOORING EXPERIENCE



## iQ Eminent



## COORDINATE AND CREATE YOUR DESIGN

Colour harmony contributes to well-being. That's why Tarkett's new iQ Eminent brings more design flexibility for architects with additional outstanding design options - for a truly harmonious flooring experience in healthcare, education and other public buildings.

iQ Eminent features a palette of primary and neutral colours completed by shades in natural grey and beige in a distinctive non-directional design with 3D effect. Now Tarkett has added six Unisense designs options, coordinated to match the core colourways of the collection but with an adapted chip pattern.

This rhythmic colour range enables you to vary project design with different intensity of colour and pattern within the same collection to fit the ambience you want to create – from orienting traffic in walkways to conveying calm in individual rooms or creating contrast from one area to another.

iQ Eminent combines outstanding technical performance with great aesthetics so you can coordinate your project design for the well-being of all users.





Colours



Yellow  
21030 151 NCS S 1070-Y20R



Red  
21030 152 NCS S 2070-Y90R



Purple  
21030 149 NCS S 5040-R30B



Light Blue  
21030 143 NCS S 2020-R90B



Medium Blue  
21030 144 NCS S 3030-R90B



Dark Blue  
21030 145 NCS S 6030-R90B



Lime Green  
21030 150 NCS S 1075-G60Y



Dark Green  
21030 148 NCS S 4030-G30Y



Medium Green  
21030 147 NCS S 1030-G60Y



Light Green  
21030 146 NCS S 1010-G80R

Neutrals



White  
21030 125 NCS S 0500-N




White Grey  
21030 126 NCS S 1500-N



Light Grey  
21030 127 NCS S 3000-N



Medium Grey  
21030 128 NCS S 4500-N

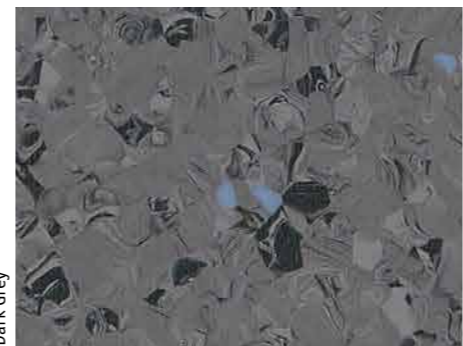


Dark Grey  
21030 129 NCS S 6000-N




Black  
21030 130 NCS S 8500-N



Light Warm Grey  
21030 131 NCS S 2502-Y

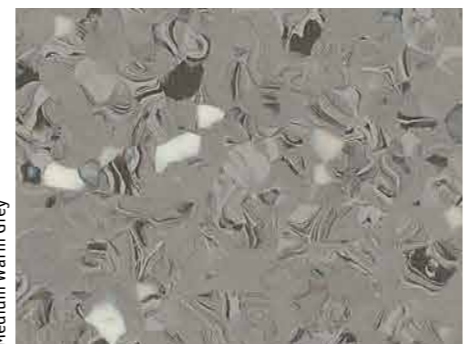

Medium Warm Grey  
21030 132 NCS S 4502-Y

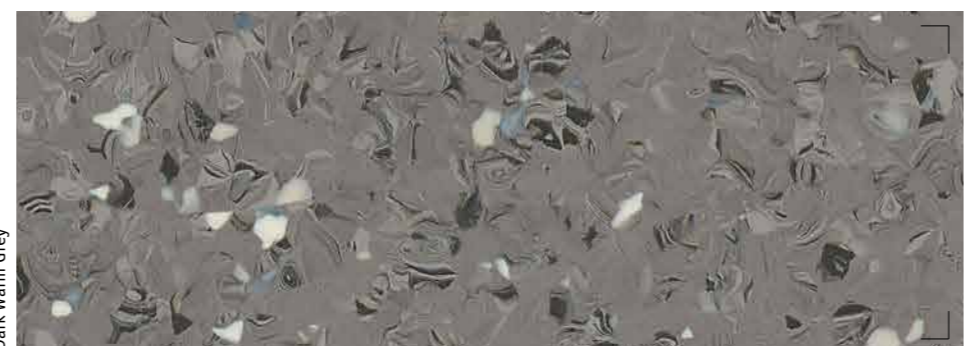

Dark Warm Grey  
21030 133 NCS S 5502-Y

Neutrals



Light Grey Beige  
21030 134 NCS S 1505-Y10R




Medium Grey Beige  
21030 135 NCS S 2005-Y10R



Light Beige  
21030 137 NCS S 1005-Y30R



Light Yellow  
21030 140 NCS S 1020-Y20R

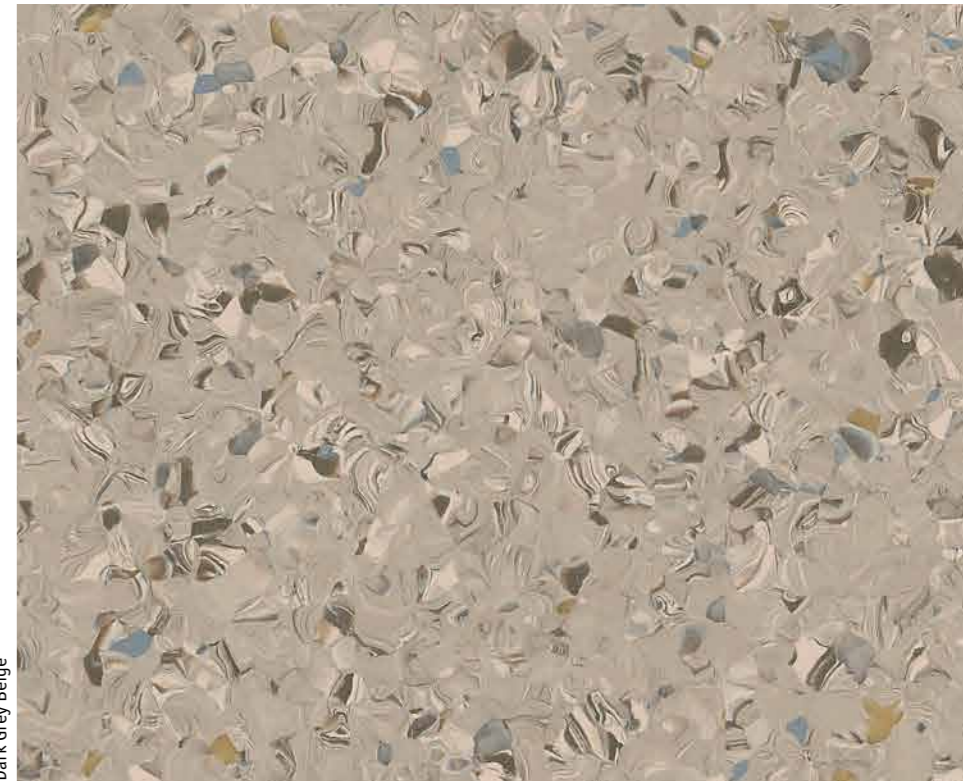


Dark Grey Beige  
21030 136 NCS S 3005-Y20R



Medium Beige  
21030 138 NCS S 2010-Y30R



Yellow Beige  
21030 141 NCS S 2020-Y30R

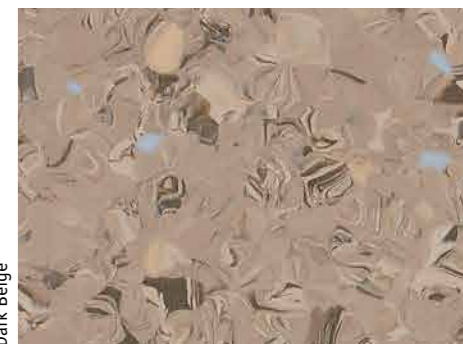

Dark Beige  
21030 139 NCS S 4010-Y30R



Brown Beige  
21030 142 NCS S 3010-Y40R

Due to limitations in printing processes the colours represented here may vary, we recommend you refer to a physical sample.