


A modern interior scene featuring a light-colored sofa with a brown throw blanket, a wooden armchair, and a log stump side table. The floor is covered with a large, textured, light-colored rug. The foreground shows a close-up of the grey wood-grain vinyl tiles.

Urban Naturals

Luxury Vinyl Tiles

 **Tarkett**

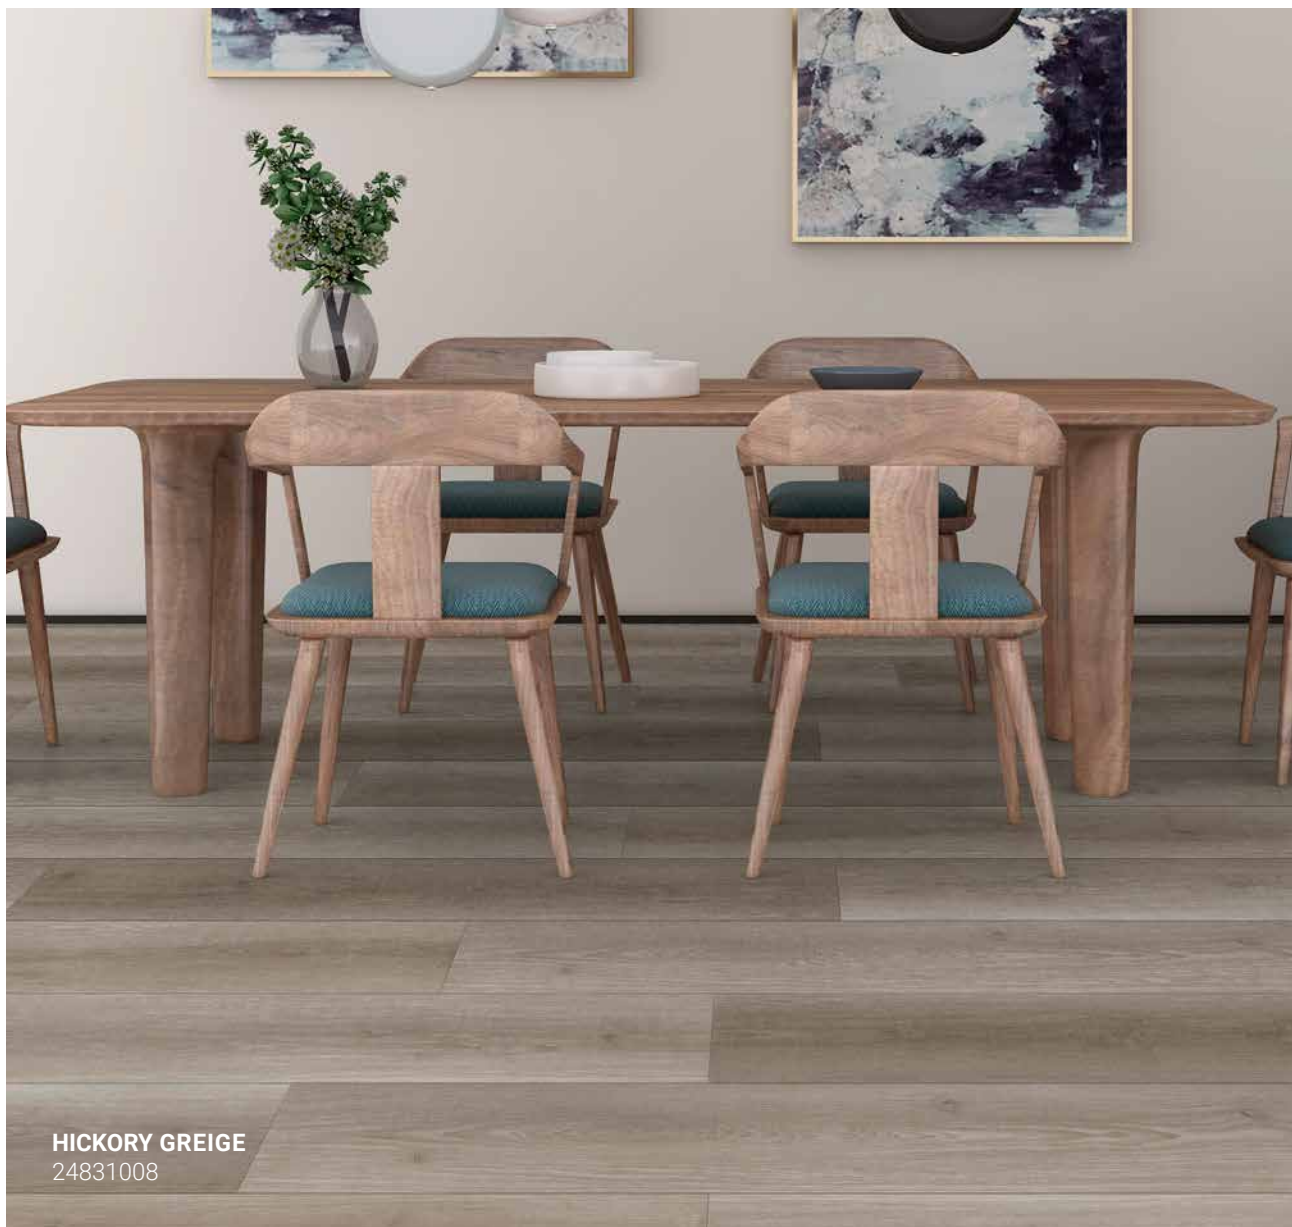


HICKORY GREIGE
24831008

Discover Affordable Luxury with Urban Naturals LVT

Tarkett's Urban Naturals Luxury Vinyl Tiles combine the timeless appeal of natural timber and the contemporary edge of concrete aesthetics. With a selection of 13 modern designs, available in both Plank and Tile formats, Urban Naturals LVT offers versatile options to complement any environment.

Whether you're furnishing a residential or commercial space, Urban Naturals LVT promises flooring that not only meets the rigorous demands of modern living but also enhances the ambiance with its stylish designs and durable quality. Tarkett's dedication to excellence and innovation is evident in every Plank and Tile, ensuring a high standard of performance and aesthetic appeal.

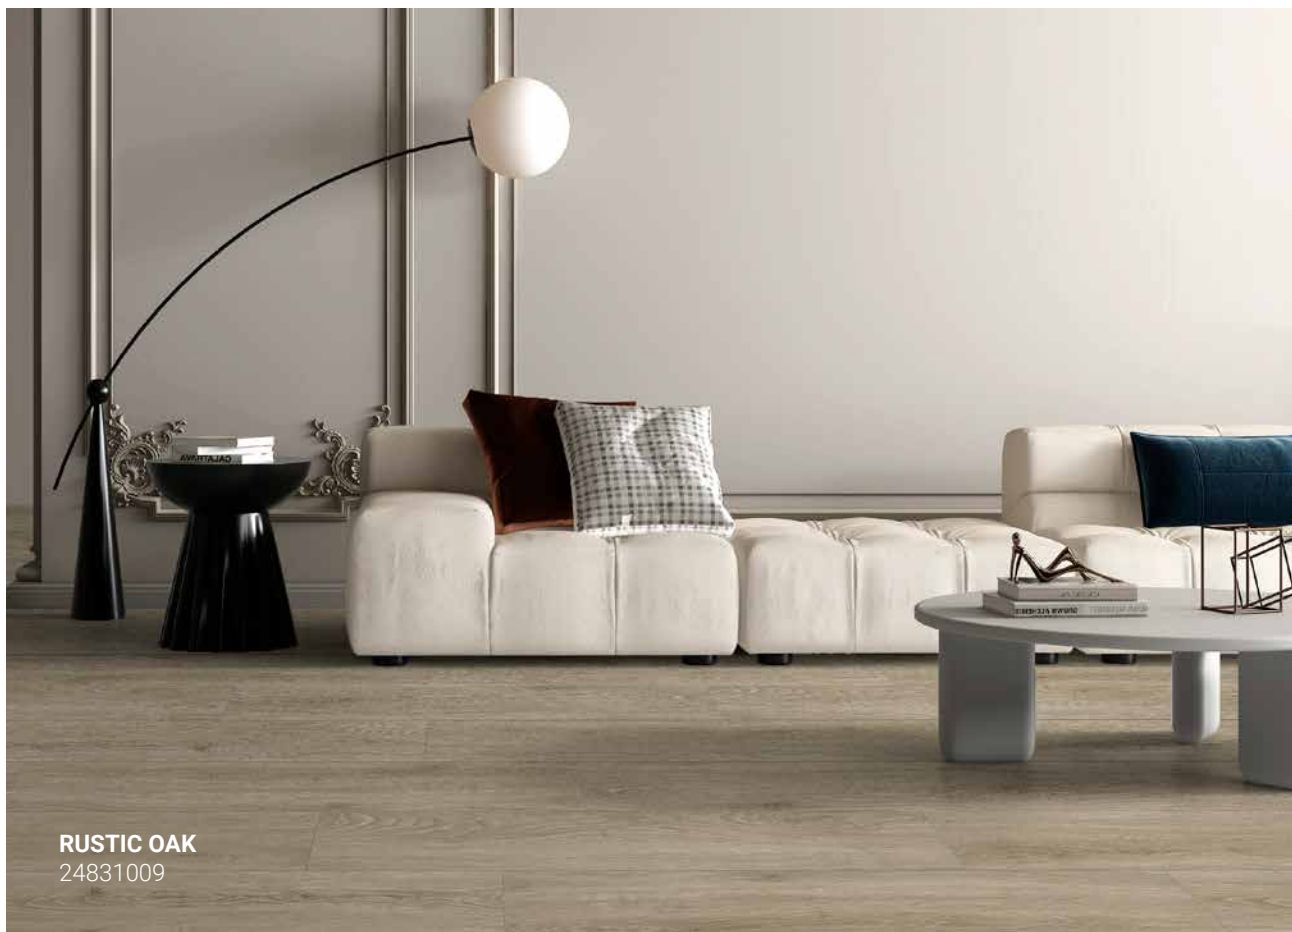

Ideal for Home or Commercial Spaces

Urban Naturals LVT is the ideal choice for homes, combining durability with style. Crafted with families in mind, these floors are designed to withstand the challenges of everyday life. Whether it's pet paw prints, children's playtime, or unexpected spills, Urban Naturals LVT maintains its aesthetic appeal while offering exceptional durability.

In commercial settings, Urban Naturals LVT excels with its robust 0.5mm commercial graded wear layer, ensuring ultimate performance and durability. Designed to withstand heavy foot traffic, these Tiles and Planks are exceptionally hardwearing, making them suitable for Retail spaces, Healthcare facilities, Workplaces, and more. Urban Naturals LVT is the practical choice for commercial environments where durability and aesthetic appeal are paramount.

Key Features:

- Recreate the beauty of timber or concrete with a modern touch
- Choose from a variety of colours to complement your interior
- Easy maintenance and superior stain resistance with TopClean™ Surface
- Built to withstand daily wear with a 0.5mm commercial graded wear layer, ideal for residential and commercial use
- Hassle-free maintenance allows for easy replacement of damaged Tiles or Planks



Low VOC
indoor air quality



Underfoot comfort



Life proof



Easy maintenance

Design Collection

Planks (1227.8 x 190mm)



NATURAL CHERRY
24831006



HICKORY GREIGE
24831008



LIGHT BROWN OAK
24831007



BLACKBUTT
24831011



RUSTIC OAK
24831009



RUSTIC WHITE MAPLE
24831005



NATURAL OAK
24831002




HICKORY BLACK
24831010




GREY OAK
24831004

Colours are a representation only. Please view a physical sample before making final selection.

Tiles (457 x 457mm)




SALT
24823026



SLATE
24823028



BASALT
24823029



GRAPHITE
24823024



SLATE
24823028

Technical Datasheet

Classification	Standards	Urban Naturals
Product type	ISO 10581	Compact resilient floorcovering
Technical Characteristics	Standards	Urban Naturals
Surface Treatment	ISO 10581	UV Coating (Ceramic bead)
Surface restoration		Yes
Total thickness	ISO 24346	2.5 mm
Wear layer thickness	ISO 24340	0.5 mm
Total weight	ISO 23997	4500 g/m ²
Wear layer binder content	ISO 10582	Type I
Bevelled edges		Yes - Micro bevel
Dimensions	ISO 24342	Planks 190 x 1227.8mm 12 planks/box = 2.80 m ² Tiles 457 x 457mm 12 tiles/box = 2.51m ²
Technical Performance	Standards	Urban Naturals
Reaction to fire	AS/ISO 9239.1	Critical radiant flux 10.4kW/m ² Smoke 59%.min
Thermal resistance	ASTM C518-2017	0,008 m ² •K/W per single tile
Side length	ISO 24342	Deviation ≤ 0.15% of nominal length up to 0.5mm maximum
Width	ISO 24342	Deviation ≤ 0.10% of nominal length up to 0.5mm maximum
Slip resistance	DIN 51130 AS 4586	R10 P3
Squareness and straightness	ISO 24342	≤ 0.35mm
Dimensional stability	ISO 23999	≥ 0.25%
Curling after exposure to heat	ISO 23999	±2.0mm
Residual indentation	ISO 24343-1	≤ 0.10mm
Castor chair	ISO 4918 (EN 425)	No damage
Colour fastness to light	ISO 105-B02	≥ 6 grade
Opening between elements	ISO 10582	Average ≤ 0.10mm Individual values ≤ 0.15mm
Height difference	ISO 10582	Average ≤ 0.10mm Individual values ≤ 0.15mm
Gloss retention	EN 16094 A	Rating 1
Micro - scratch resistance	EN 16094 B	≥ Rating 2
Scratch resistance	ISO 1518-1	≥ 2000g
Gloss	ISO 2813	±2
Peeling resistance	ISO 24345	≥ 50N/50mm
Furniture leg	EN 424	No damage
Resistance to chemicals	ISO 26987	Class 0
Sound impact absorption	ISO 717-2	Δ LW =4dB
Sustainability performances	Standards	Urban Naturals
Formaldehyde emission	EN 717-1	E1
Heavy metal	EN 71-3	Not Detected
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		7,04 kg CO ₂ eq /m ²
Phthalate		Not Detected
Total VOC Emissions	AGBB A+	Pass

The above information is subject to modification for the benefit of further improvement. (07/24)

Tarkett instructions regarding installation, cleaning and maintenance should be observed.

Please contact Tarkett at the address shown for these instructions.

Disclaimer: Please note that products in photos are installed for creative purposes and not according to technical specifications. Please refer to the Tarkett installation instruction for guidance.



Tarkett Australia

Suite 1, Level 3, 3 Columbia Court,
Baulkham Hills NSW 2153
(02) 8853 1200
customerservice@tarkett.com
www.tarkett.com.au

