

400 PSI 1-2+ +10  
12 +10

**VET**

Vinyl Enhanced Tile



Color Essence™  
THE **AZROCK** COLLECTION



Color Essence™  
THE AZROCK®  
COLLECTION



## How Color Essence can help you create high performance environments.


Color Essence, a vinyl enhanced tile, can increase productivity in high performance spaces by making people more comfortable and lowering maintenance costs and downtime. It can motivate and inspire through color, pattern and design.

1. VET construction means greater ROI
  - Withstands foot traffic and requires less maintenance
  - Ideal for areas that do not receive constant routine maintenance
  - Tritonite wearlayer requires less initial maintenance
2. Low environmental impact
  - Contains a minimum of 23% pre-consumer recycled content and a minimum of 6% post-consumer recycled content

- Floorscore certified
  - Manufactured in facility meeting ISO 14001 and ISO 9001 standards
3. Elements for a motivating space
    - 51 color options suitable for a variety of commercial applications
    - 6 coordinating slip resistant options
    - Coordinating Johnsonite wall base, transitions and other finishing accessories
  4. Added benefits of SpraySmart Adhesive
    - Double warranty protection
    - 10 year manufacturing warranty
    - 10 year limited moisture warranty
    - Immediate occupancy of space after installation

51 COLORS  
6 SLIP RESISTANT  
12 x 12

# Vinyl Enhanced Tile / Color Essence™

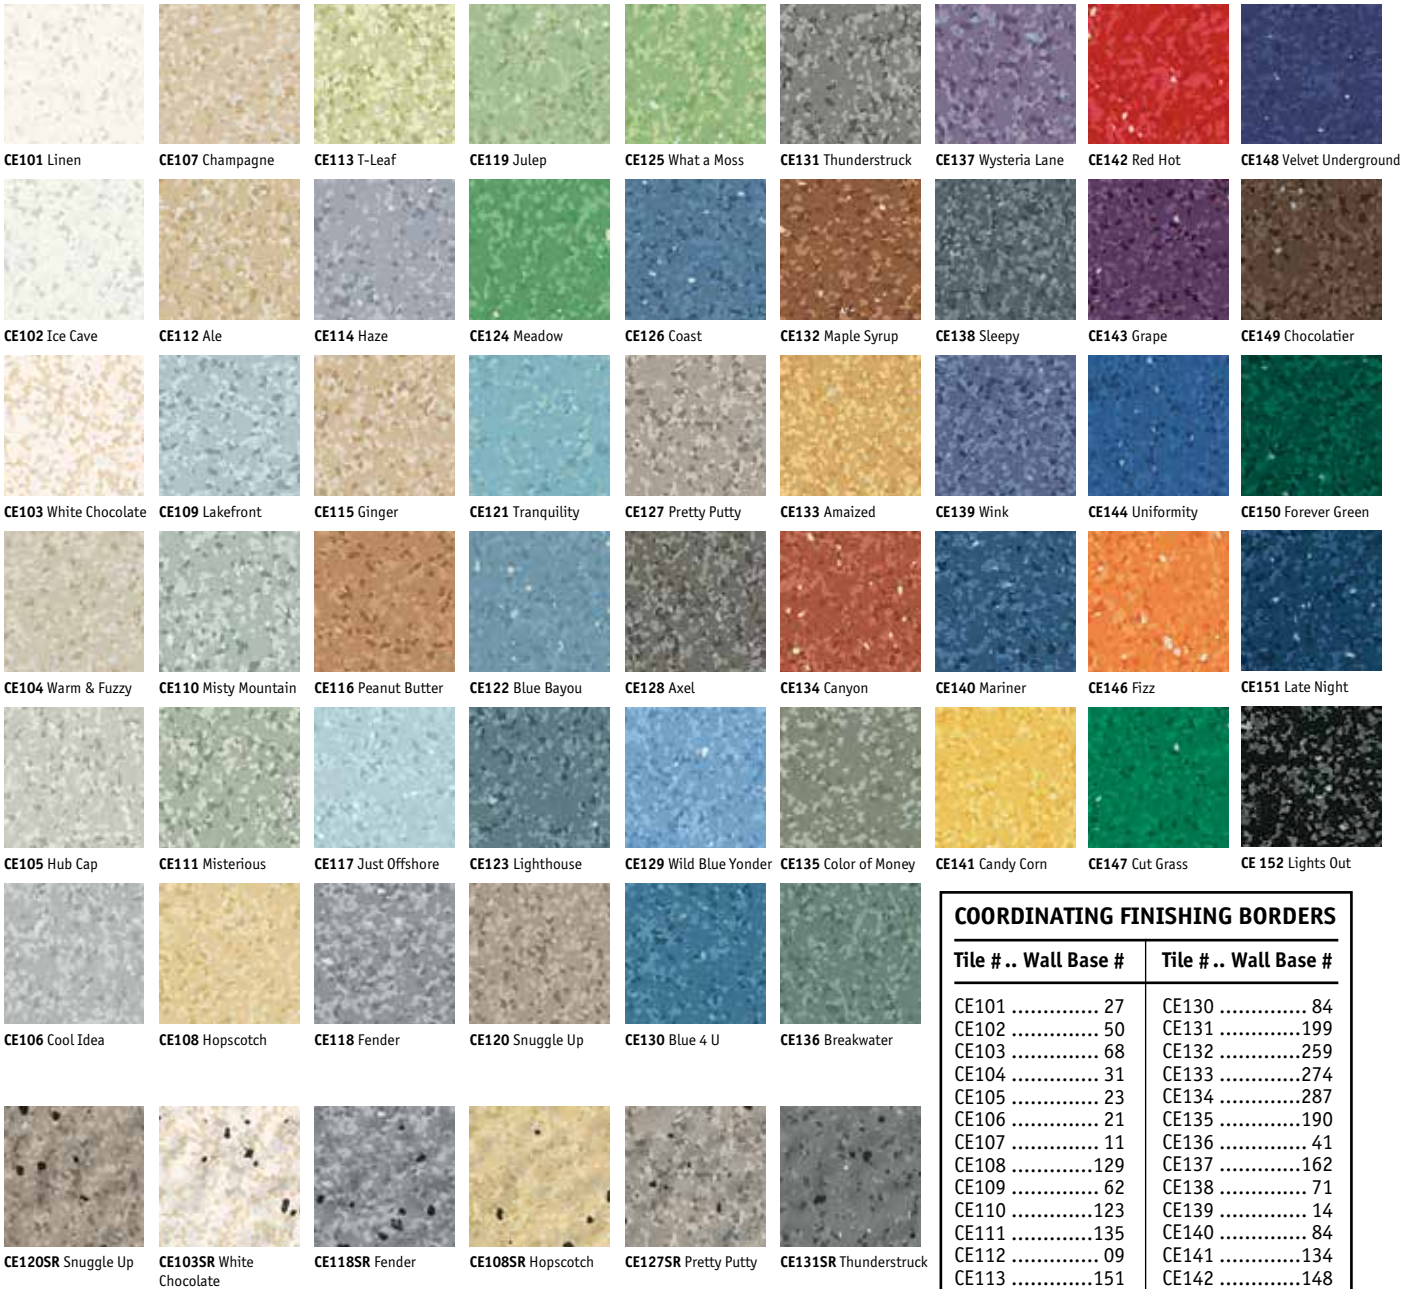


COORDINATING FINISHING BORDERS			
Tile # ..	Wall Base #	Tile # ..	Wall Base #
CE101 .....	27	CE130 .....	84
CE102 .....	50	CE131 .....	199
CE103 .....	68	CE132 .....	259
CE104 .....	31	CE133 .....	274
CE105 .....	23	CE134 .....	287
CE106 .....	21	CE135 .....	190
CE107 .....	11	CE136 .....	41
CE108 .....	129	CE137 .....	162
CE109 .....	62	CE138 .....	71
CE110 .....	123	CE139 .....	14
CE111 .....	135	CE140 .....	84
CE112 .....	09	CE141 .....	134
CE113 .....	151	CE142 .....	148
CE114 .....	137	CE143 .....	162
CE115 .....	49	CE144 .....	106
CE116 .....	259	CE146 .....	273
CE117 .....	291	CE147 .....	152
CE118 .....	38	CE148 .....	14
CE119 .....	271	CE149 .....	284
CE120 .....	80	CE150 .....	86
CE121 .....	291	CE151 .....	18
CE122 .....	58	CE152 .....	40
CE123 .....	72	CE108SR .....	129
CE124 .....	271	CE103SR .....	68
CE125 .....	271	CE118SR .....	38
CE126 .....	58	CE120SR .....	80
CE127 .....	121	CE127SR .....	121
CE128 .....	29	CE131SR .....	199
CE129 .....	84		

Color-coordinated Johnsonite finishing borders and accessories are available to complement Color Essence VET tiles for an integrated flooring system.


# Color Essence is the perfect flooring solution for Healthcare,



## The ABC's of VET (Vinyl Enhanced Tile)

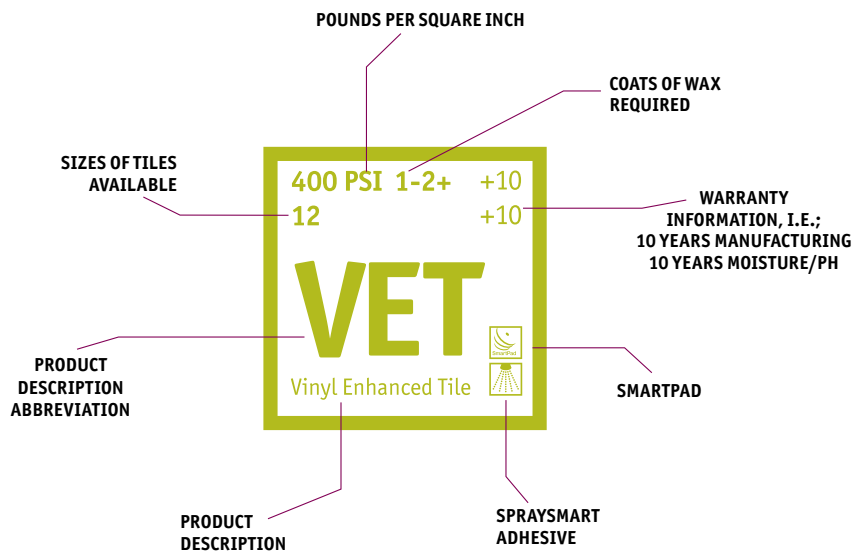

# Education and Retail applications.

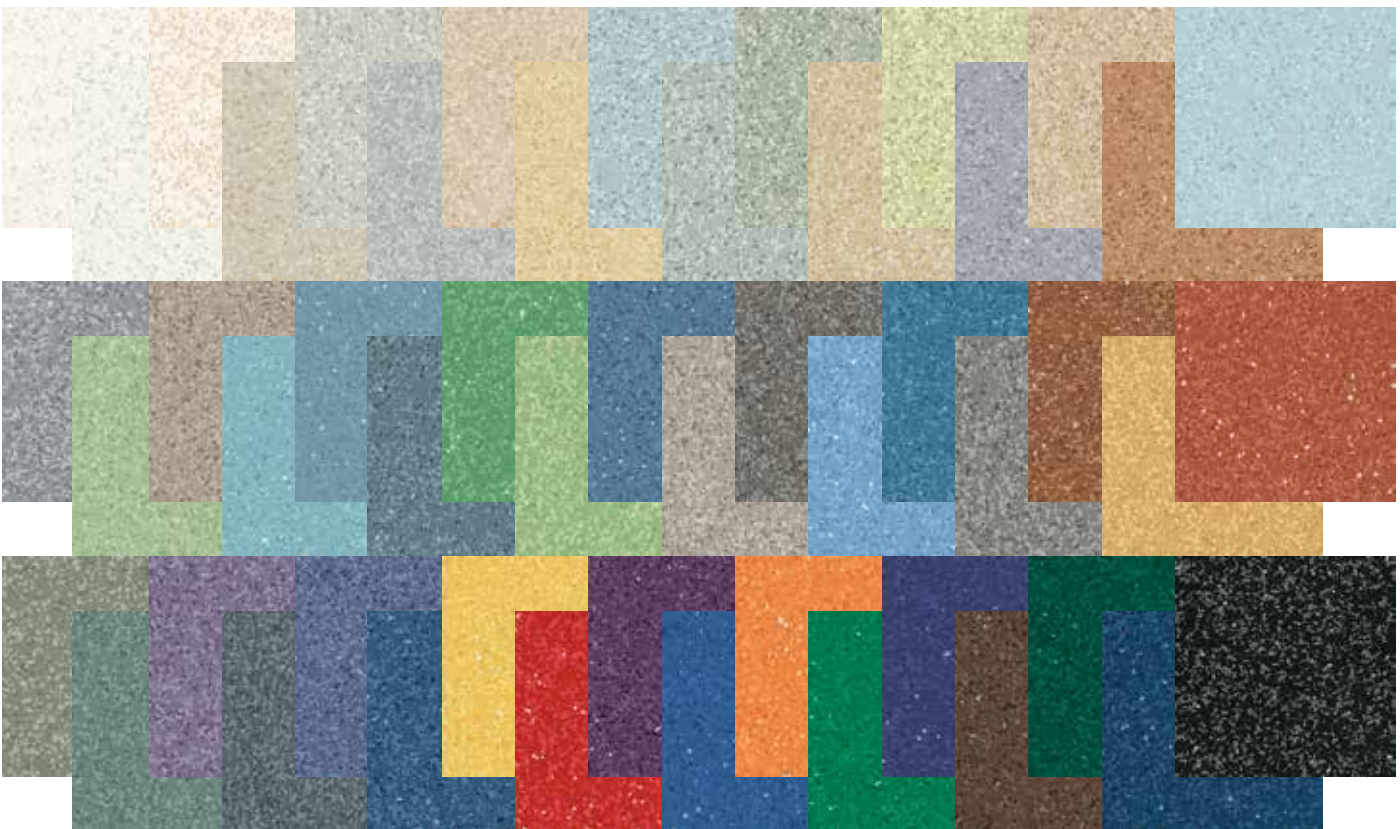



# Color Essence™ | The Azrock® Collection

## DESCRIPTION

Color Essence is a low-maintenance VET flooring solution in a wide selection of colorways to suit many types of interior design in a multitude of segments and applications. Following a proper maintenance program can greatly reduce life-cycle costs for a real lifetime return. Made in the USA.

Technical Data	Standards	Color Essence
Type of Floor Covering		Vinyl Enhanced Tile
Classification	ASTM F 1066	Meets Requirements
Polyurethane Reinforced		Tritonite
Total Thickness		1/8" (3.2 mm)
Static Load Limit	ASTM F 970†	400 psi (modified)
Tile Size		12" x 12" (30.5 cm x 30.5 cm)
Weight/sq. ft./m <sup>2</sup>		1.20 lbs sq. ft. (12.92 lbs. m <sup>2</sup> )
Carton Quantity		45 tiles = 45 sq. ft. (4.18 m <sup>2</sup> )
Carton Weight		54 lbs (24.5 kg)
Flammability	ASTM E 648	Class 1 >0.45 CRF
Smoke Density	ASTM E 662	<450
Slip Resistance SCOF	ADA Compliant	Both smooth and slip resistant (SR)
Chemical Resistance		Good
Colors		51 Smooth, 6 Slip Resistant
Warranty		10 Year LIMITED Warranty. See <a href="http://www.johnsonite.com">www.johnsonite.com</a> for complete warranty information.
Maintenance		Reduced Finish Maintenance / 1-2 coats of finish*

Sustainable Facts	
<b>Color Essence</b>	Possible LEED Point Contribution
<b>Construction Waste Management</b> ReStart® Reclamation Program MR 2	1-2
<b>Recycled Content</b> Pre-Consumer 23% Post-Consumer 6% MR 4	1-2
<b>Regional Materials</b> Manufactured in Florence, Alabama, an ISO 9001 facility MR 5	1-2
<b>Indoor Air Quality</b> Low Emitting materials EQ 4.3 FloorScore certified and meets CA 01350	1
<b>Return on Investment</b> Easy to clean, less waxing required Reduced water, detergent and energy costs Requires fewer man-hours to install	

**SpraySmart**

- Immediate Occupancy
- Reduce Install Time
- Environmentally Friendly

\* Depending upon use of the floor.  
 † Static load limit per ASTM 970 modified by specifying a higher load.  
 Please visit [johnsonite.com](http://johnsonite.com) for the most updated specifications, and installation, cleaning and maintenance instructions.  
**How to Order:** Smooth: CE-(XXX) Color Number  
 Slip Resistant: CE-(XXX) Color Number-SR

*The Johnsonite system includes transitions and finishing borders (wall base) to complete your flooring design and installation.*

[www.johnsonite.com](http://www.johnsonite.com)



**Johnsonite**  
**A Tarkett Company**  
 16910 Munn Road  
 Chagrin Falls, OH 44023  
 800-899-8916 or 440-543-8916



[www.johnsonite.com](http://www.johnsonite.com)

©2011 Johnsonite Inc. Printed in the USA 2/11 LPCEJO

The contents of this document including, but not limited to, all text and images (Content) are owned by Johnsonite Inc. with all rights reserved unless otherwise noted. Any Content that is a trademark, logo, or service mark is also a registered and unregistered trademark of Johnsonite Inc. Your use of any Content without the written permission of Johnsonite Inc. is strictly prohibited.