

Excellence

HETEROGENEOUS FLOORS,
WALLS AND STAIRS


The colour
chart
that sets
the tone

4	Design inspiration
12	XXL designs
18	A global solution
22	Create inclusive spaces
26	Expertise and sustainability
34	Excellence – glue-down and loose-lay floors
40	Platinum – heavy-duty flooring
44	ProtectWall – wall coverings
48	Tapiflex Stairs – stair solutions
52	Accessories
62	Design overview
74	Tables and codes
78	Technical datasheets

Contents

The colour chart that sets the tone

Introducing our new heterogeneous vinyl walls and floors range, a collection that resonates with architects and designers seeking authenticity in their spaces. From lifelike wood textures to timeless terrazzo, concrete and mineral inspirations, our collection offers classic and contemporary options. Explore a vast array of modern colours and graphics – the essence of the Excellence design story – to bring your architectural visions to life.

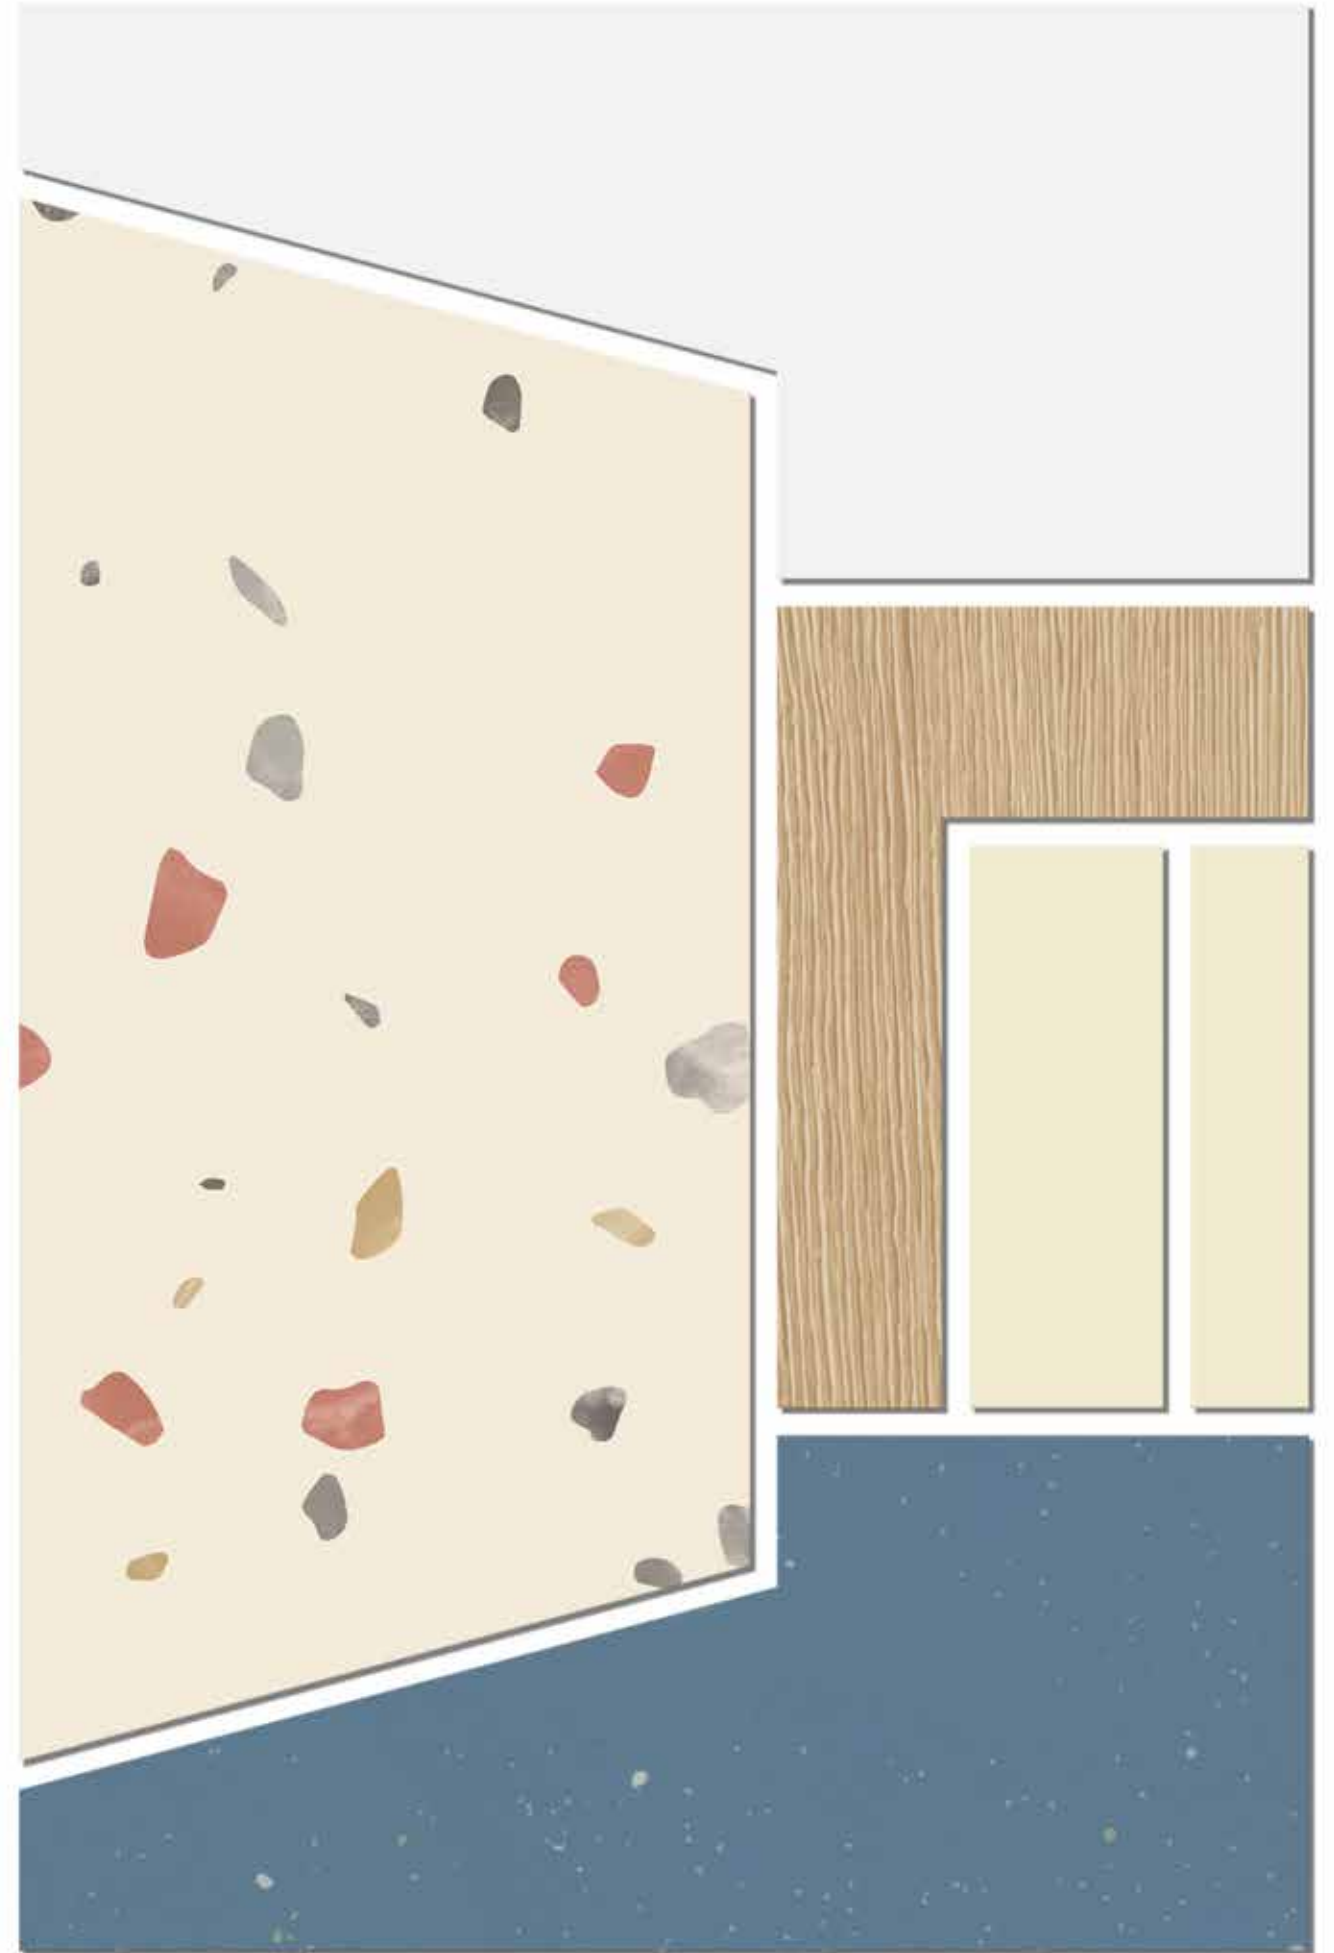

Wood



**Hyperrealism
of natural hues**

The different wood patterns
faithfully capture the authenticity
and diverse tones of wood.


Minerals



**Elegance of stones,
modernity of concrete**

The designs draw inspiration from a spectrum of minerals such as stone, marble, basic grey or coloured concrete, as well as the aesthetic appeal of terrazzo.



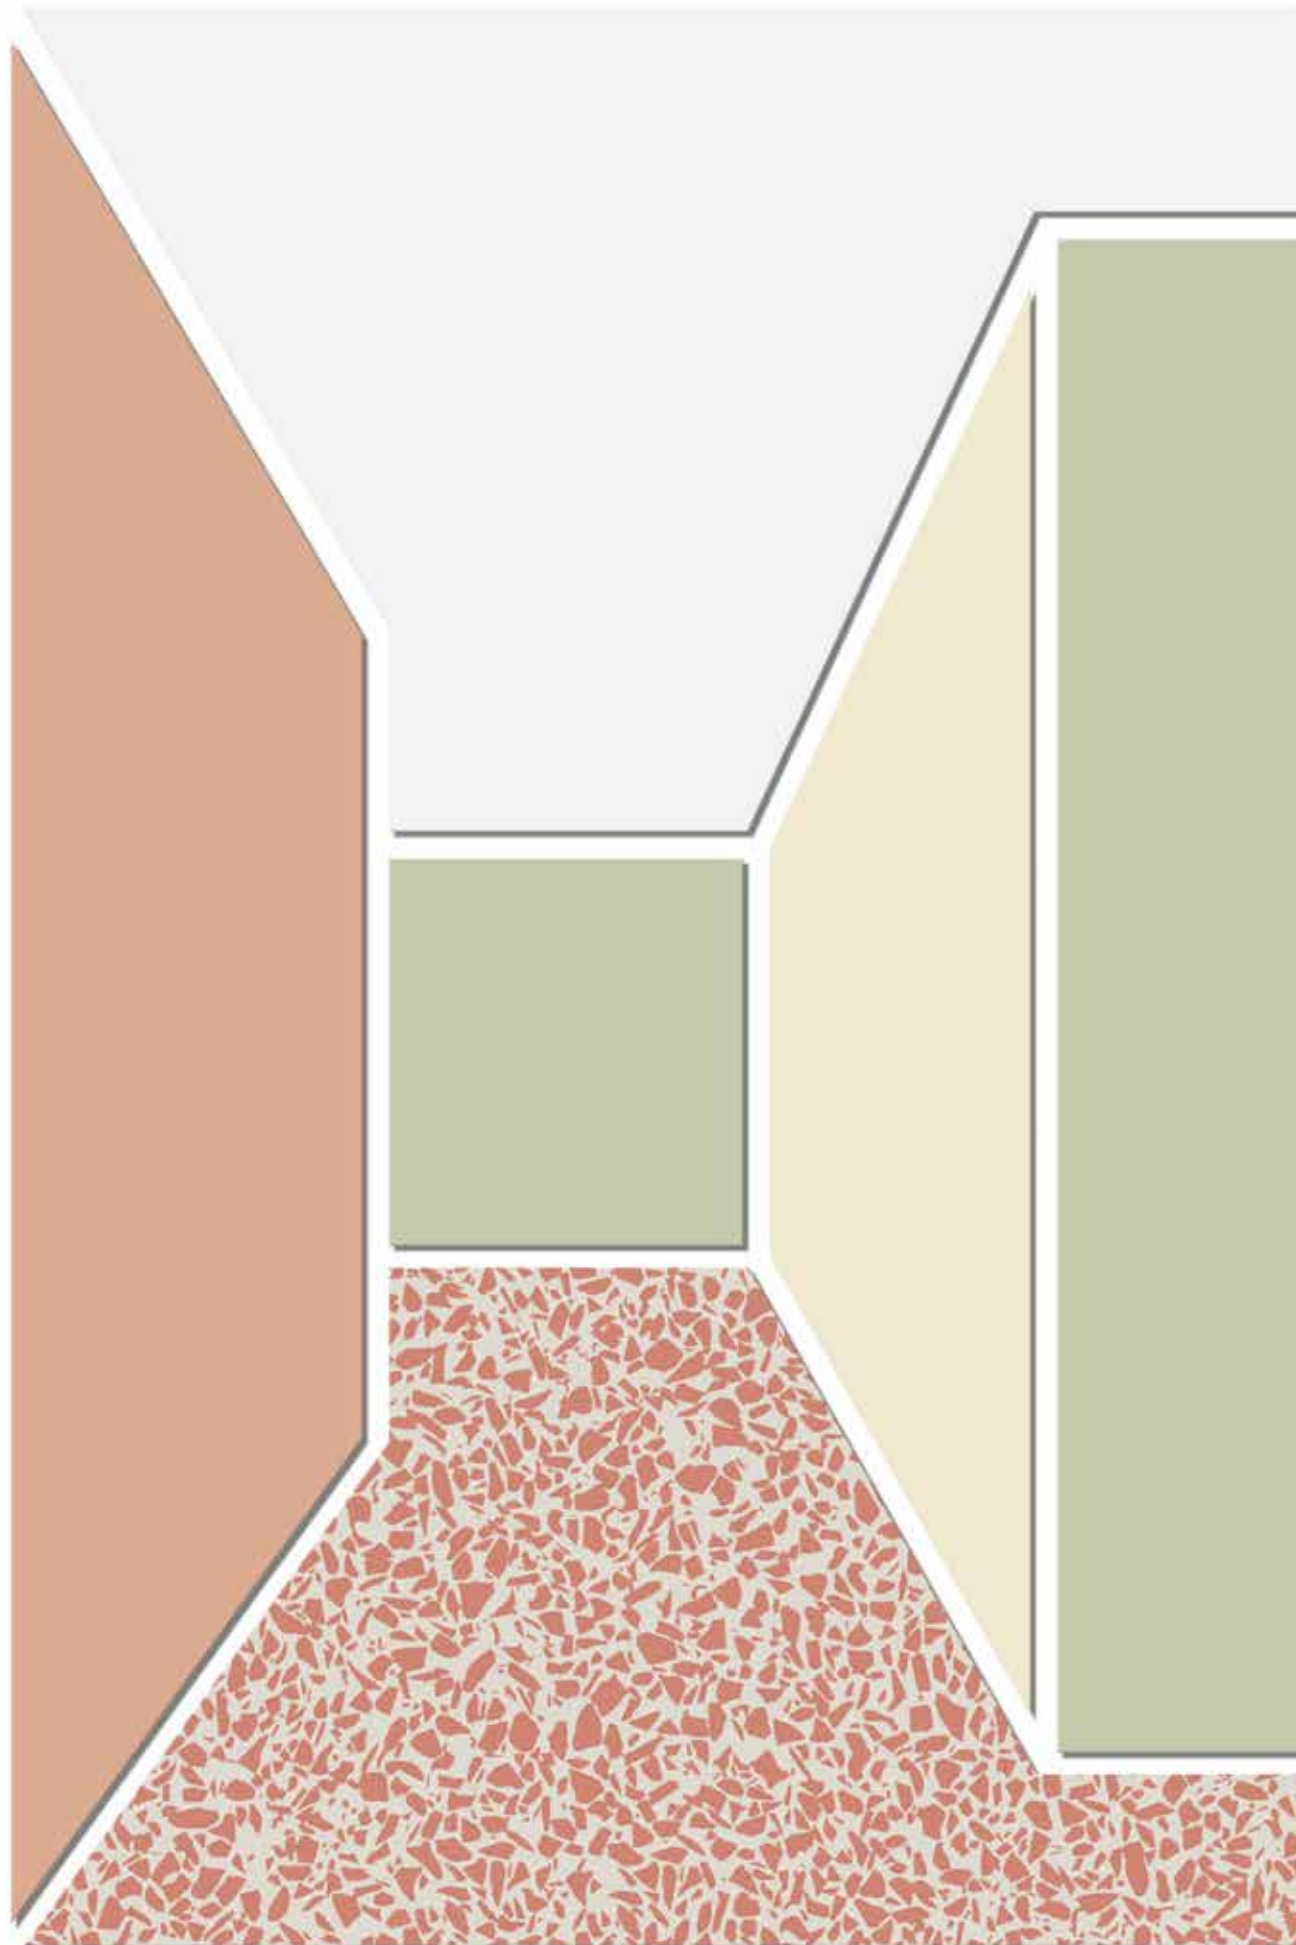

Colours



**Contemporary
colours and graphics**

Introducing new uni-colors with contemporary hues and easy-to-live-with tones – together with a mix of both bold and subtly recognisable graphics.



For XXL spaces

XXL CARRARA
GRANDE natural



XXL BRECCIASTONE
grey



XXL BRECCIACINO
nude



XXL OAK
natural



XXL OAK
golden




**Rediscover
the limitless naturality
of the elements**

Find immense inspiration in the seamless replication of XXL marble, wood or stone patterns on floors spanning up to 6 metres in length.

XXL designs



Standard design

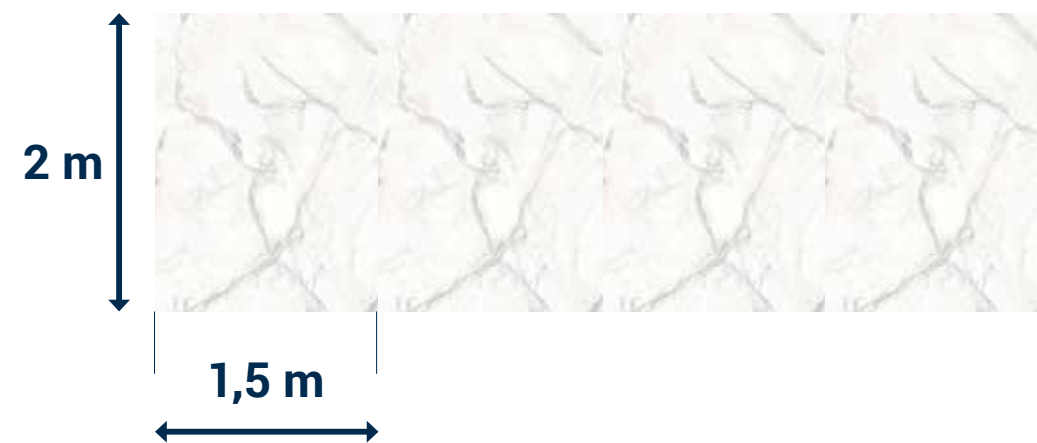

- Authenticity and extra scale to reflect the true diversity of the natural world
- Reproducing the unpredictable beauty of nature
- Unique timeless parquet decor
- Extra realism with 200 × 20 cm planks
- Available in a standard range





A global solution

Excellence

The multi-option floor range, suitable for all segment needs. With compact or acoustic performances and a large array of design choices, including XXL designs.

Excellence Genius

Floors designed with the loose-lay installation method for a lower carbon footprint and when quick renovation is needed.

Platinum

Extreme resistance floors for highly demanding environments such as those in healthcare facilities.

ProtectWall

Heavy-duty wall covering for healthcare and education environments. Offers high protection from rough treatment and the need for repeated renovation.

Tx Stairs & Accessories

The complementary stairs solutions ensure a safer step in all settings and are available with a complete selection of accessories.

Explore a comprehensive range of **technical solutions tailored for high-traffic environments, spanning floors, walls and stairs.** Each collection is meticulously crafted to deliver optimal sustainable credentials while providing a wide spectrum of inspiration and designs that match perfectly.



More easy cleaning with Tektanium

TEKTANIUM™

PU coating uses an innovative polymer system, forming a stronger layer of protection that delivers excellent resistance to **scratches, abrasions, wear and stains**.



Ease of cleaning and maintenance

Rated Excellent in cleanability test:
Simply wipe with a damp microfibre cloth = no residues visible whatsoever (according to Riboflavintest, third party evaluation)

Needs less time for cleaning, less water and less chemical products = financial savings and consideration for the environment.


Highly resistant to bacteria
Tested according to ISO 846
does not encourage bacterial growth

Improved resistance to stains
No absorption of most common chemical agents and solvents used in healthcare facilities and elderly care homes (ISO 26987 test-rated as not affected by most substances)



Excellent resistance and durability

Improved resistance to micro-scratches:
withstands twice as much traffic and heavy duty solicitation



Matte finish

It also offers a matte finish and is consistently visible from all angles. This enhances the designs and patterns of the range, resulting in more realistic effects.



See more on our cleanability and performance tests






Creating inclusive spaces with Excellence collections

Thanks to the wide design possibilities of the range, **Excellence collections also cater to inclusive design needs** such as individuals with autism or dementia.

The selection of colours, decors and technical characteristics should be taken into consideration when designing spaces adapted to differences in sensory processing, executive functioning and emotional regulation. The following aspects are all important considerations in choosing the right solution:



Visual comfort

Use colours and contrasts across the ranges to create:

- Way finding, signage
- Emotionally adapted environments



Select adapted colours and patterns from the collections to create a dementia-friendly design and lessen the impacts of old age and dementia.



Discover our DSDC accredited dementia-friendly designs



Acoustic comfort

Make sure to adapt acoustics through a vast array of floors with acoustic performances:

- Minimise in-room ambient noise
- Reduce noise coming from adjacent rooms
- Floors from 17 to 19 dB, some of them rated Class B



Safe and healthy environment

Choose floors and walls that will promote wellbeing inside the building:

- Optimal indoor air quality
- R10 slip resistance across the whole range
- Rollability and walking comfort

How to choose your floor from our range?



You need
**more acoustic
comfort**

Good sound
reduction
+ good rollability



**Tapiflex
Excellence**
17 dB

Good sound
reduction
+ excellent rollability



**Tapiflex
Platinum**
17 dB

Excellent sound
reduction
+ good rollability



**Tapiflex
Excellence**
19 dB



Excellence floors offer **the adapted solutions
and options needed** for your projects.



You need
**more rollability
& durability**

Excellent rollability
+ good reduction of
in-room impact noise
(Class B)




**Acczent
Excellence
Compact+**
(8 dB)

Extreme rollability
+ good reduction
of in-room impact noise
(Class B)



**Acczent
Platinum**
(9 dB)





You need
**a low carbon
footprint**

Low carbon
footprint + excellent
rollability



**Acczent
Genius
Compact**

Low carbon footprint
+ excellent acoustic
comfort




**Tapiflex
Genius
Acoustic**
19 dB



Expertise and sustainability Made in Europe

Many years of expertise for quality you can trust

Our Excellence collections are designed and manufactured at our production plants in Europe, ensuring the development of an advanced and sustainable range.



The range is manufactured in our factories that live up to strict European quality standards and embrace eco-conscious practices.



By choosing Tarkett heterogeneous solutions, you are opting for products proudly Made in Europe, thereby making a conscious decision to positively impact the environment by reducing transportation distances.



As our heterogeneous collections are produced in Europe, you not only support local European economies but also promote local European craftsmanship and social responsibility.



Because our Excellence collections are produced in Europe, we can ensure lower transportation costs to our European customers and positively impact our products' carbon footprint.



Sustainability at the heart

Recycling at our Clervaux recycling centre since 1995

We recycle in accordance with ISO 14021



Our pioneering take-back and recycling programme, **ReStart**, makes it possible to close the loop. This includes installation waste and post-use waste.

TEKTANIUM coating protects against deterioration from constant use and makes cleaning easier and quicker

Our products last longer for bigger financial savings and more consideration for the environment

Recycling post-use material (Excellence Genius)



98% of materials assessed by a third party

No heavy metals, No biocides and No phthalates for more responsible PVC

Responsible production with 0% production waste to landfill

Up to 100% green electricity

100% recirculated industrial water in a closed-loop system

Made in Europe for a shorter transportation distances for

Reduced carbon footprint

Glue-free solutions to facilitate floor disassembling and recycling

Tarkett Academy to learn the best installation methods

Acoustic comfort thanks to our acoustic solutions


Optimal indoor air quality
Ultra-low VOC emissions, less than 10 µg/m³

Visual comfort solutions such as **dementia-friendly designs**



Reduce your impact with Excellence Genius

With Excellence Genius we are **the first flooring manufacturer to master closed-loop, post-use recycling for vinyl floorings.**

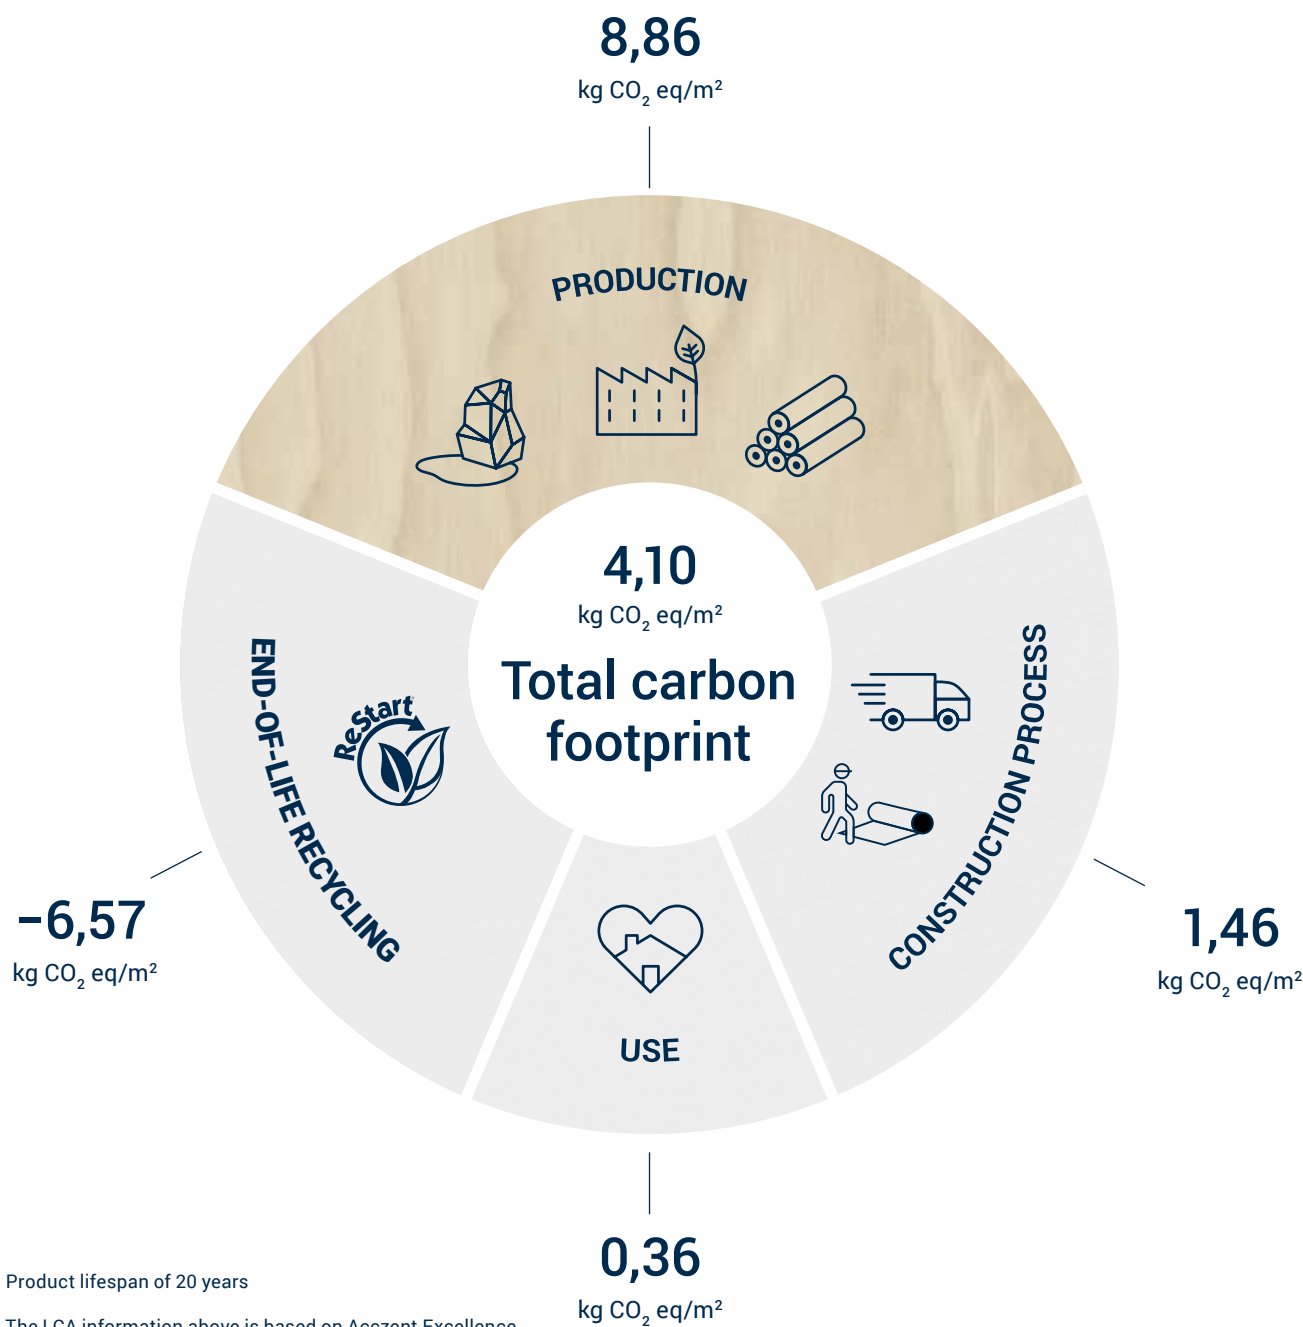


Product lifespan of 20 years

The LCA information above is based on Acczent Excellence Genius 70's Environmental Product Declaration (EPD)

[EPD Number: S-P-01357](#)

EPD comparison should be conducted by experts only

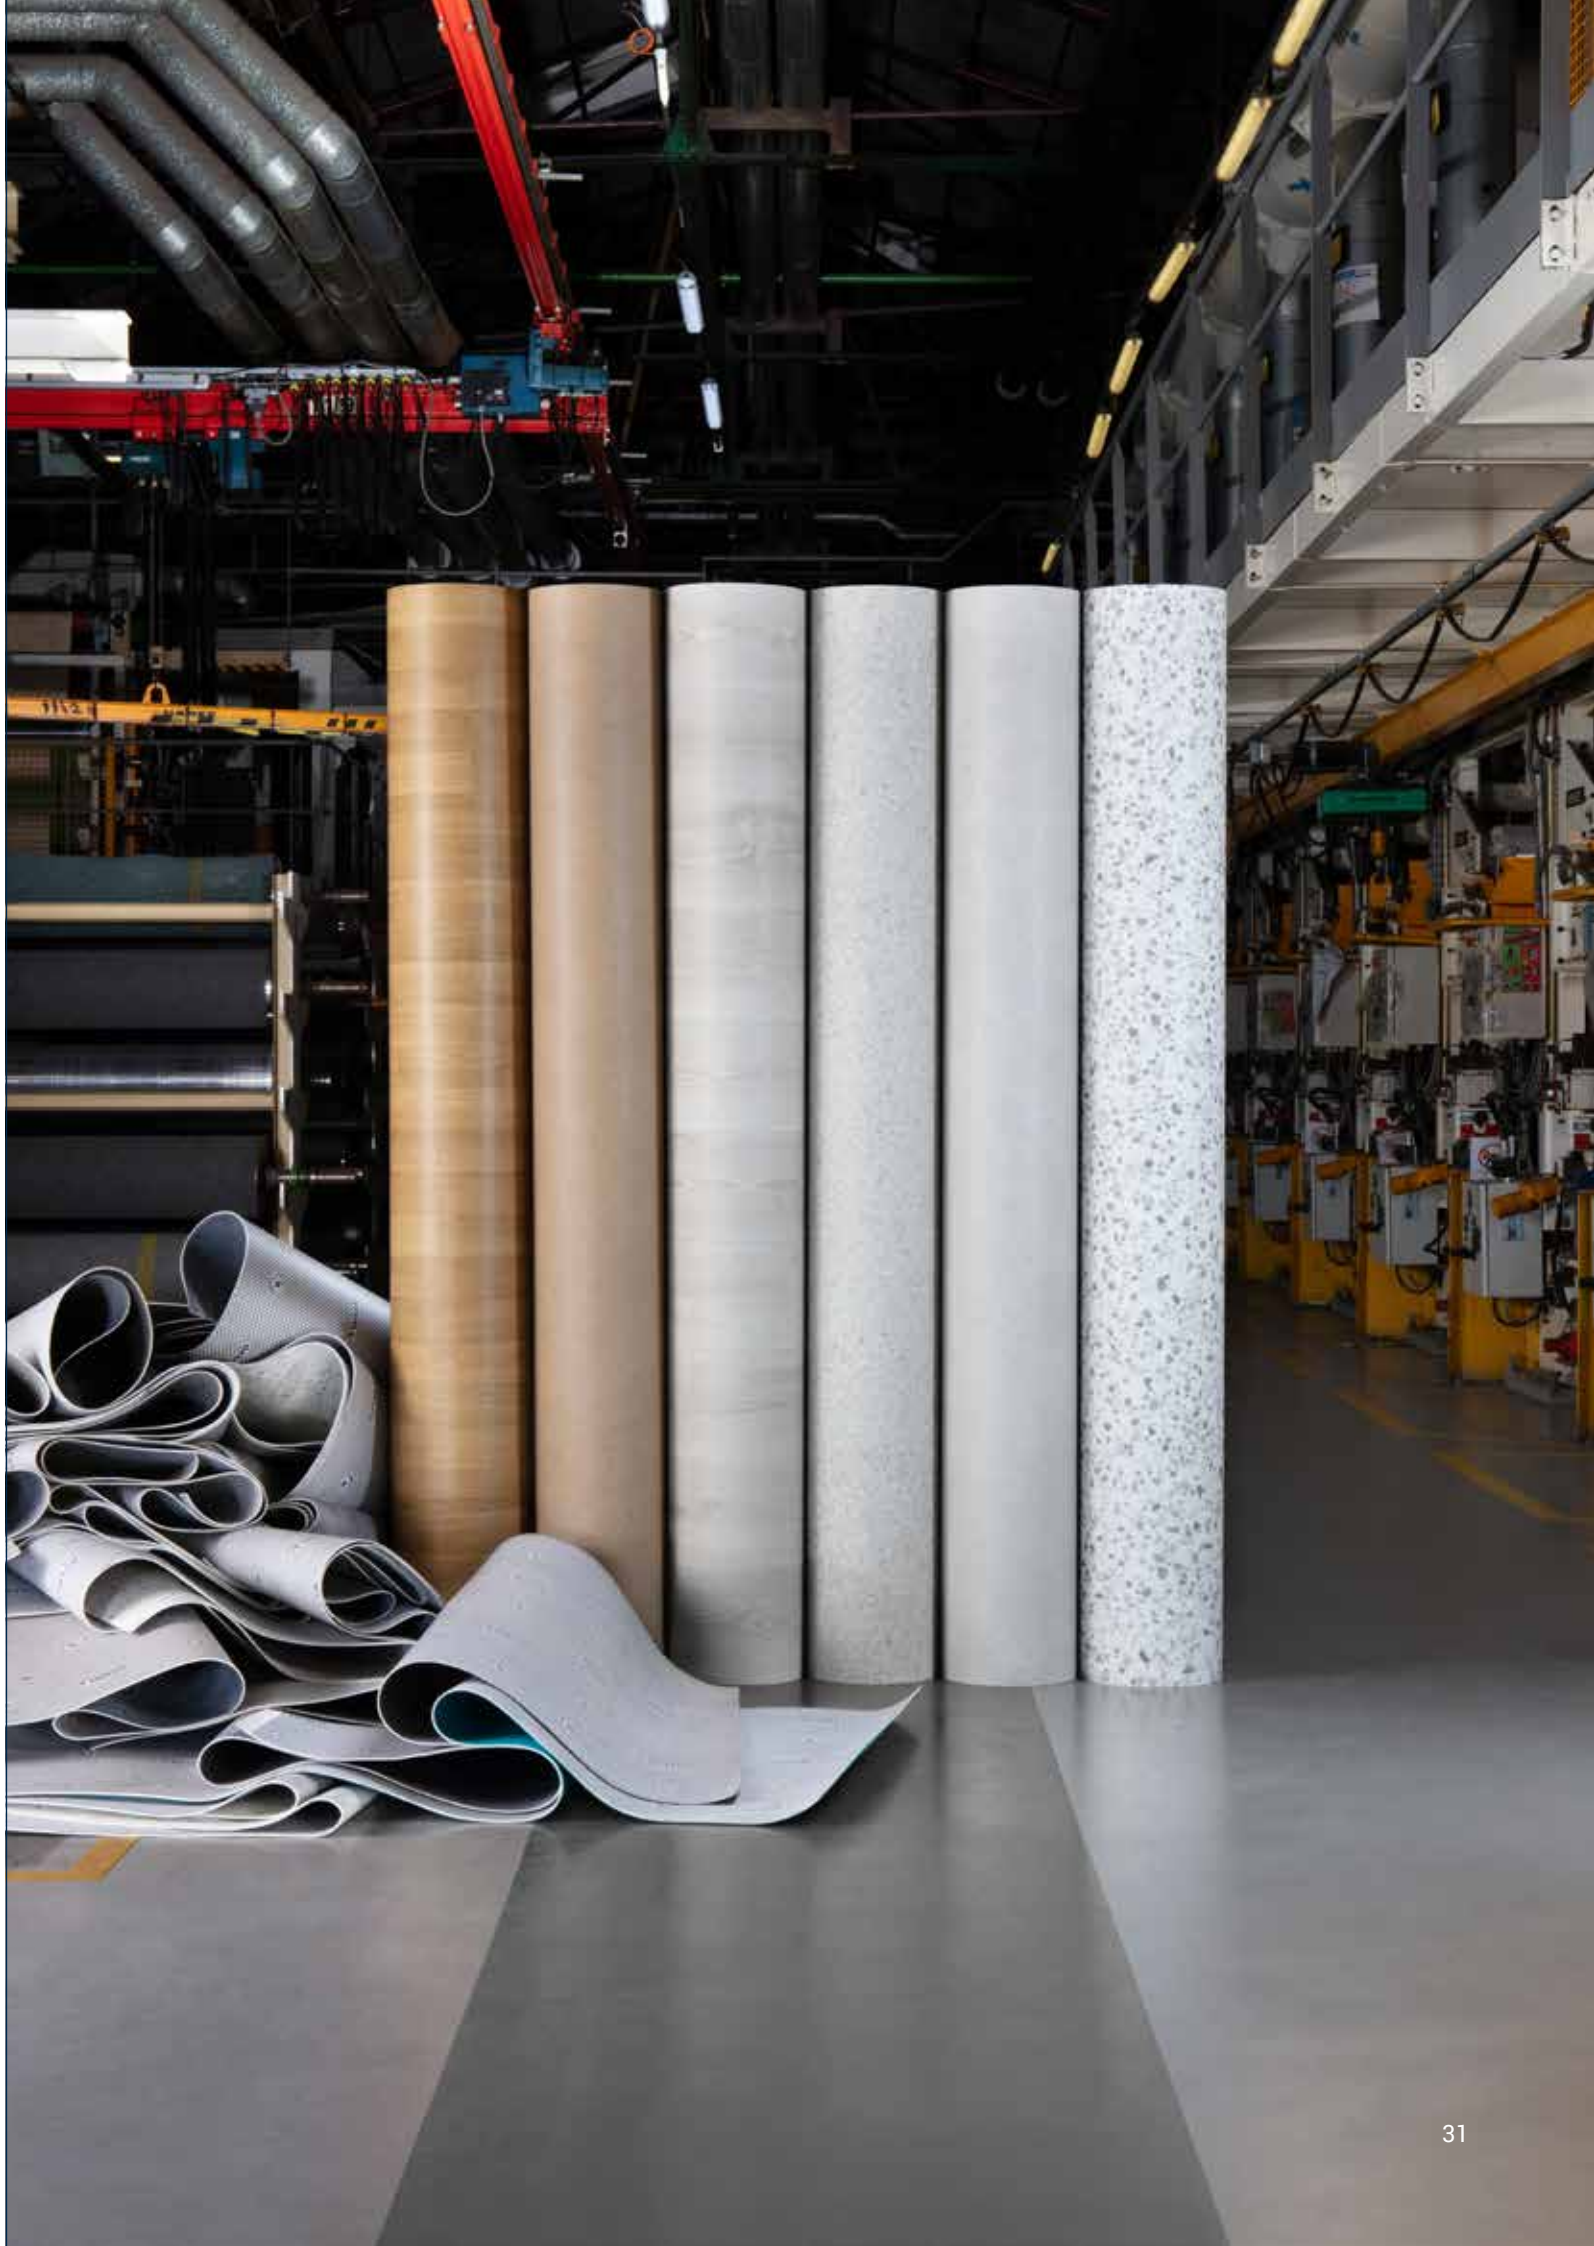



Recycling with ReStart®

Recycling allows you to reduce your carbon emissions impact, preserve **natural resources** and reach **higher standards of sustainability**.




Collecting waste

Our floors are recycled **in accordance with ISO 14021** : we offer a functional system to collect installation and post-use waste (ReStart®), and transport it to our recycling facility Clervaux in Luxembourg.



Recycling waste

We have been recycling heterogeneous vinyl **since 1995**. We transform it into high-quality raw materials to use in new heterogeneous floors.



Recycled materials

Both post-use* and post-installation waste are recycled and turned into new products. This is how our Excellence range contains **up to 29% recycled material**.



Hassle-free programme

Our dedicated **ReStart® take-back and recycling programme** has been offering **post-installation and post-use recycling since 2003**. This is a hassle-free system that guarantees collection and recycling into new raw materials or products.


Contact your local Tarkett sales offices to find out how to register for ReStart®. Reduce your carbon footprint and become part of the loop to incorporate more recycled content.




Excellence

Excellence floors are the responsible solution if you need a high-traffic-resistant floor with creative possibilities and adapted performances. It offers a choice of installation methods (glue-down or loose-lay) and is available with acoustic performance for sound reduction or a compact profile for improved rollability and resistance to indentation. The range offers a renewed palette of classic and on-trend designs, with an array of materials, patterns and colours for more creativity. The natural designs are extremely authentic and realistic, giving you a solution that is as beautiful as original wood or minerals.

Excellence Glue-down profiles

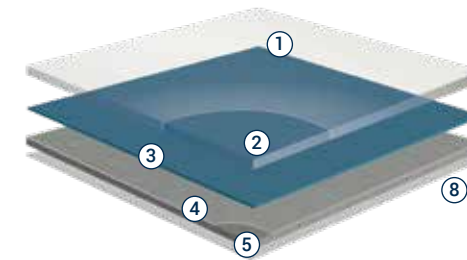


Tapiflex Acoustic
Impact sound reduction 19 dB




Accent Compact+
Excellent rollability,
Good sound reduction (8 dB)
and Class B for in-room impact
noise reduction

Excellence Genius Loose-lay profiles

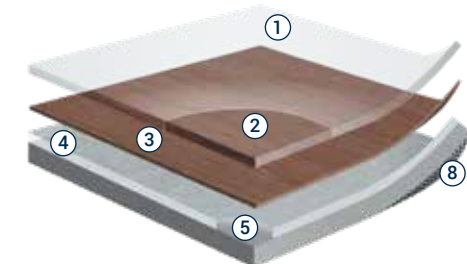

Tapiflex Acoustic
Impact sound reduction 19 dB



Accent Compact
Very high-intensity traffic
and damp subfloors

① Tektanium PU coating uses an innovative polymer system – forming a stronger layer of protection that delivers excellent resistance to scratches, abrasions, wear and stains.

② Pure PVC transparent wear layer for the best resistance to traffic and wear

③ High-quality printed designs for a vast selection of colours and patterns

④ Improved high-density glass fibre non-woven reinforcement for excellent dimensional stability and resistance to furniture

⑤ Reinforced solid homogeneous calendared sheet made of recycled vinyl for resistance to indentation and tearing. The Compact+ version offers a certified 8 dB sound reduction and Class B in-room impact sound reduction.

⑥ Specific to Genius profile: integrated damp protection layer, preventing moisture from rising through the flooring from the subfloor

⑦ Specific to Genius profile: anti-skid ventilated backing ensures air circulation and ventilation underneath the floor covering, as well as better grip and product stability over time

⑧ The Tapiflex version has high-density closed-cell foam backing for sound reduction, higher rollability and underfoot comfort

Glue-down

	→	Tapiflex Excellence 19 db	Tapiflex Excellence 17 db
	→	Acczent Excellence Compact+ 8 dB Impact sound reduction / Class B reduction of in-room impact noise	

Creative
Colour Chart

**3 Inspirations**
Wood – Minerals – Colours

**93 designs**
Matte finish

Hyperrealism
of wood textures
and materials

**5 XXL formats**
2 × 6 m. No repeat

**Approved**
Dementia-friendly
designs

Responsible
Flooring

Produced
in Europe

27%
Recycled
content

Recycling*
though **Restart®**

**≤ 10 µg/m³**
Optimal indoor
air quality

**No phthalates**
No biocides
No heavy metals

Improved
Performance

TEKTANIUM™
Innovative coating for easier
cleanability and cost-effective
maintenance

Extreme durability
and scratch resistance

Improved resistance
to stains (ISO 26987
test-rated as not affected
by most substances)

Excellent cleanability:
no residues visible
whatsoever
(Riboflavin test)

* off-cuts and post-installation recycling





Genius loose-lay



Tapiflex
Excellence
Genius 19 db



Acczent
Excellence Genius
Compact

Timeless
classic designs



3 inspirations:
Wood – Minerals –
Textures



25 classic
designs



Hyperrealism
of wood textures
and materials



Matches with
Platinum collection,
wetroom and stairs



Approved
Dementia-friendly
designs

Closing the loop for
reduced carbon impact



Produced
in Europe



Recyclable post-
use (+off-cuts and
post-installation)



Recycled
content



Glue-free
installation method



Optimal indoor
air quality



No phthalates
No biocides
No heavy metals


Quicker installation,
extra performance
TEKTANIUM®



**Saves you installation
time (vs. glue-down):**
up to 56% on initial
installation and up to 92%
with renovation




**Can accept foot traffic
immediately after
installation**
No waiting time



**Compatible with
multiple subfloors**
(standard cement, standard
wood, asbestos*, damp
subfloors**, existing
compact vinyl and linoleum)




**Compatible with
damp subfloors**
(compact version) Up to 7% CCM
/ 92% HR



**Resistant to high traffic
and rolling loads**
Resists to 115 kg Furniture Leg
& 100,000 cycles Castor chair
Resists to 300kg medical beds
and 600kg X-ray systems
Best in class dimensional
stability 0.04%

Platinum

The Platinum collection's inlaid construction makes this floor particularly well-suited to high traffic areas like healthcare and education buildings, where constant activity creates extremely demanding environments. It is highly resistant and comes with a compact or acoustic profile. The inlaid design incorporates multiple colours to suggest a sense of depth and robustness that carries timeless quality and durability.

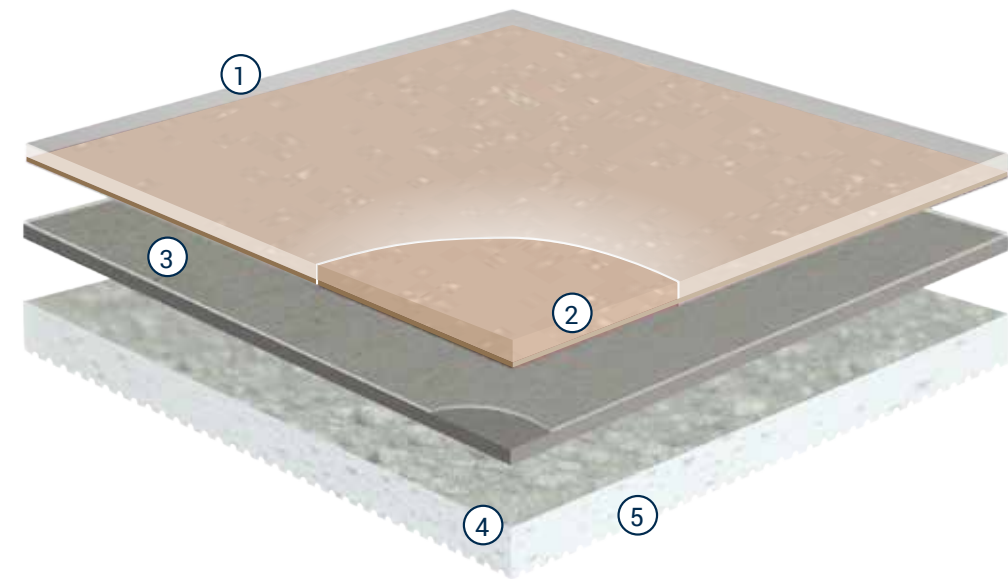

- ① Tektanium PU coating uses an innovative polymer system – forming a stronger layer of protection that delivers excellent resistance to scratches, abrasions, wear and stains
- ② Opaque wear layer incorporates inlaid designs for higher perceived resistance
- ③ High-density, non-woven glass fibre reinforcement for high dimensional stability and resistance to furniture
- ④ Solid homogeneous calendared sheet made of recycled vinyl for resistance to indentation and tearing
- ⑤ The Tapiflex version features a high density closed-cell foam backing for sound reduction, higher rollability and underfoot comfort

Glue-down




**Tapiflex
Platinum**
17 db



**Acczent
Platinum**
Compact

Robust Colour Chart



5 Patterns
Emerging
from the inlaid
construction



35 Designs
Matte finish



Matching
Floors and walls
available in
Tarkett's range



Seamless finish
Thanks to unique
multicolour
welding rods

Responsible Flooring




Produced
in Europe



Recycled
content



Recycling*
through **Restart®**



Optimal indoor
air quality



No phthalates
No biocides
No heavy metals

Improved Performance



Extreme resistance
Inlaid product
construction
1 mm wear layer
on all products

TEKTANIUM™

Innovative coating for easier
cleanability and cost-effective
maintenance



Extreme durability
and scratch
resistance



**Improved resistance
to stains**
(ISO 26987 test-
rated as not affected
by most substances)



Excellent cleanability
no residues visible
whatsoever
(Riboflavin test)


* off-cuts and post-installation recycling

ProtectWall




In busy education and healthcare environments, as well as buzzing hospitality and office areas, ProtectWall offers high protection from rough treatment and the repeated need for renovation. ProtectWall stands up to scratches, impacts and staining agents, is easy to clean and preserves its appearance even after repeated cleaning. The range embodies a contemporary spirit, resonating deeply with the essence of nature.

Available in a captivating array of colours and patterns that encapsulate the fusion of modernity with timeless natural motifs.

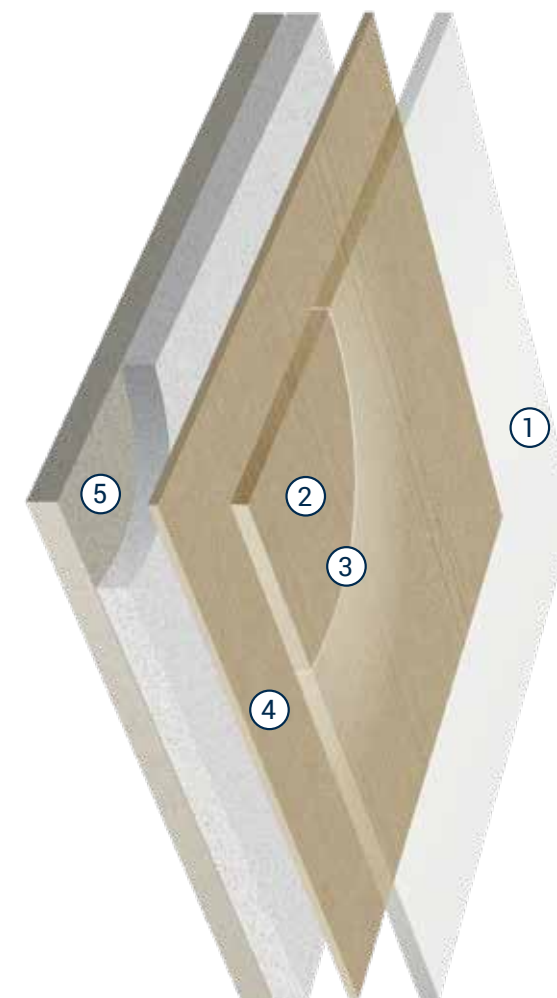

- ① Top Clean XP PUR Reinforced:
Excellent resistance to scuffing,
soiling and staining.
Easy maintenance.
- ② 4 different embossing options
available
 - For more elegant designs:
 - Tisse: warm touch and feeling
of textiles
 - Flat: for a perfect matte
contemporary finish
 - Paper: timeless dry and natural
effect, similar to paint and
wallpaper with a matte effect
 - Special for cleanrooms:
 - Aquarelle: certified for
cleanrooms
- ③ Clear wear layer: 0.15 mm
Excellent resistance prevents
scratches and abrasion.
- ④ High-definition printing for more
realistic and varied designs.
Helio or digital printed.
- ⑤ Intermediate and backing layers
for improved resistance to impact.

ProtectWall



ProtectWall 1.5 B-s2

Heavy-duty wall covering for exceptional impact and scratch resistance



ProtectWall CleanRoom

Heavy-duty wall covering designed to ensure hygiene in cleanrooms

Captivating Colour Chart	Responsible wall covering	Highly resistant
 3 Inspirations Wood – Minerals – Colours	 Produced in Europe	 Exceptional impact and scratch resistance EN259-2 – Excellent with no visible bursts or cracking
 26 designs Matte finish	 Recycled content up to 15%	 Excellent cleanability no residues visible whatsoever (Riboflavin test)
 Approved Dementia-friendly designs	 Recycling* through Restart®	 Highly resistant to bacteria ISO 846 – Does not encourage bacterial growth
 Matching floors and walls available in Tarkett's range	 Optimal indoor air quality ≤ 10 µg/m³	 Hygiene in focus Reduces germ infiltration by limiting the number of joints needed
 Accessories Available for a perfect finish	 No phthalates No biocides No heavy metals	 Cleanroom-suitable material ISO 14644-1: Highest cleanroom standard in healthcare environments**


* off-cuts and post-installation recycling – ** ProtectWall CR only – Tarkett level certified by the Fraunhofer Institute



Tapiflex Stairs



By installing Tapiflex Stairs, building occupants are ensured of their safety when taking the stairs. Visible contrast, non-slip ridges, comfort when climbing and highly resistant wear greet feet step after step. The collection features 15 inspired designs mirroring the beauty of wood, minerals or solid colours. Each one creates a cohesive environment across all areas of your building, perfectly complementing our floors and walls collections. Choose from a variety of accessibility options and accessories to promote autonomy and simplify navigation within the building.

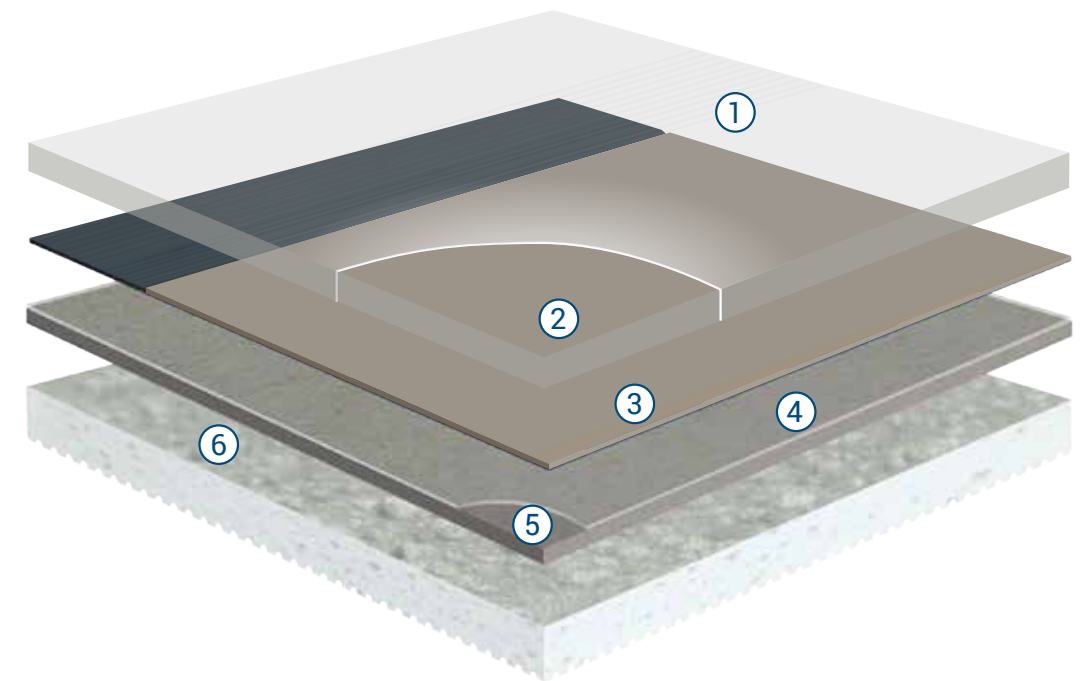


- ① PUR treatment is a photo-reticulated coating that is highly resistant to abrasion and scratches
- ② Pure PVC transparent wear layer of 0.85 mm for the best resistance to traffic and wear
- ③ High-quality printed designs for a vast selection of colours and patterns
- ④ High-density, non-woven glass fibre reinforcement for high dimensional stability and resistance to furniture
- ⑤ Solid homogeneous calendared sheet made of recycled vinyl for resistance to indentation and tearing
- ⑥ Density closed-cell foam backing for sound reduction and underfoot comfort

Tapiflex Stairs



Glue-down



Self-adhesive



2 installation methods



18 db acoustic profile
Noise absorption backing
for optimal sound reduction

Smart Designs




15 designs
Matte finish



3 Inspirations
Wood – Minerals –
Chromy



Hyperrealism
of wood textures
and materials



Matching
wetroom and
stairs ranges
available, along
with the Excellence
and Platinum
collections

Responsible flooring



Produced
in Europe



Recycled
content



Recycling*
through **Restart®**



Optimal indoor
air quality



No phthalates



No biocides
No heavy metals

Excellent performance



**The only self-adhesive
stair coverings that:**

Reduce installation
time by 30%

Allow you to keep
staircases open during
step-by-step installation
and renovation

Are available to use
immediately after
installation

Safe-dry glue




Contrast stair nosing
is included that
complies with safety
regulations



**Accessories available
for a complete
installation**

* off-cuts and post-installation recycling

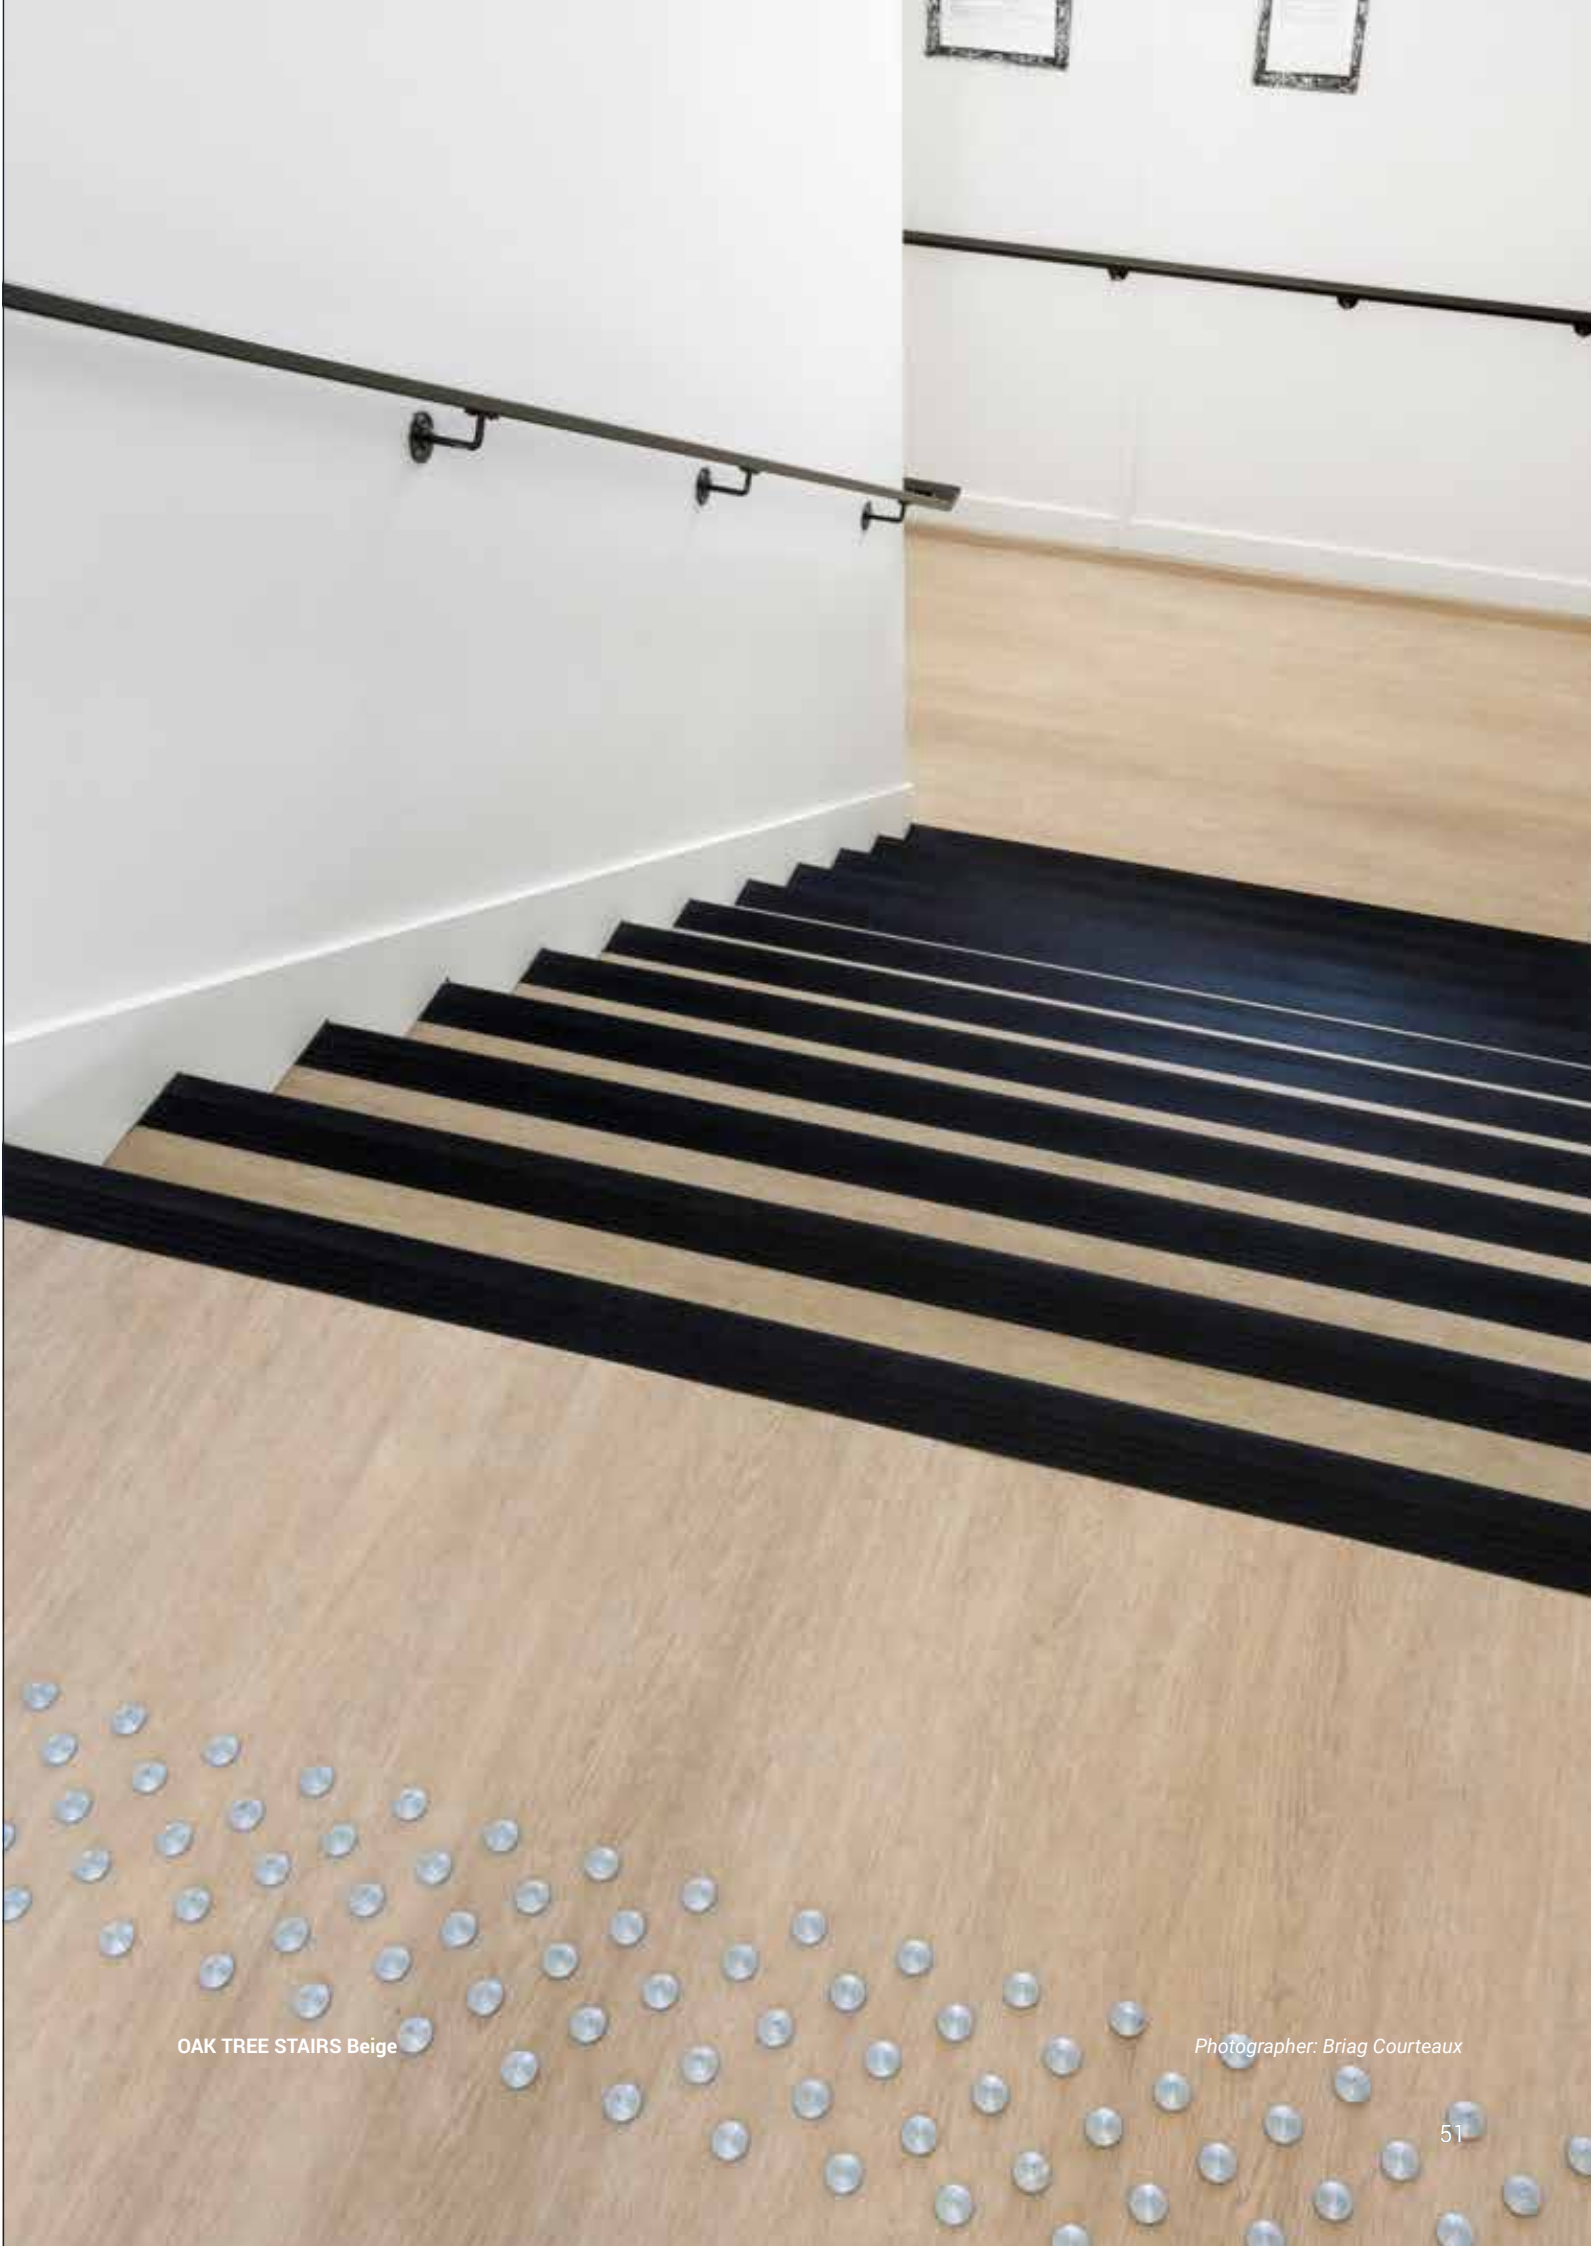

OAK TREE STAIRS Beige

Photographer: Briag Courteaux

Accessories – Skirtings

SEMI-RIGID SKIRTING – KS



PVC semi-rigid skirting for decorative use with upper and lower soft lips.

Size (mm) KS61:
60 height × 15 depth × 2500 length
1 box of 20 pieces
Size (mm) KS100:
100 height × 15 depth × 2500 length
1 box of 20 pieces

Skirting KS 61
Oak long strip natural – 1411052
Concrete cool grey – 1411053
Aluminium – 1411051
White – 206009004
Black – 206009005
Dark grey – 206009006
Medium grey – 206009007
Grey – 206009008
Light grey – 206009009
Very light grey – 206009010
Light beige – 206009011
Beige – 206009012
Dark beige – 206009013
Dark brown – 206009014
Rosewood – 1411032
Greige – 206009017
Intense petrol – 1411056
Deep yellow – 206009031
Copper tapped metal – 206009032
Chalk – 206009033
Aqua – 206009034
Deep red Uni – 206009035
Yellow – 206009036
Blue – 206009037
Intense khaki Uni – 206009038
Bricks – 206009039

Skirting KS 100
White – 206010035
Concrete cool grey – 1411168
Dark grey – 206010032
Medium grey – 206010033
Grey – 206010034
Dark beige – 1411167

DECORATIVE SET-ON SKIRTINGS



Compact PVC skirting with decorative film and PUR surface treatment to perfectly match selected designs.

Size (mm):
60 height × 10 depth × 1950 length
1 box of 5 pieces (9.75 m)

27 colours available – see colours and references in the table on page 74 to 76

RENOVATION SKIRTING



White high-density polystyrene foam 100% recyclable with a protective varnish.

Size (mm):
110 height × 22 depth × 2000 length
1 box of 18 pieces (36 m)

White – 1411301

RIGID DECORATIVE SET-ON SKIRTINGS – IS6o




Rigid decorative set-on skirtings are made with an MDF support to facilitate easy insertion of the floor covering and for a perfect colour match.

Size (mm):
60 height × 2570 length
1 box of 20 pieces (2.5 m)

Medium grey – 1448000
Light grey – 1448001
White – 1448002

FLEXIBLE SKIRTINGS – PL

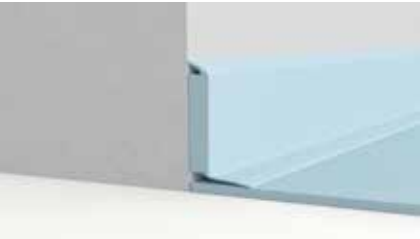

Very flexible PVC skirtings that are used where clean finishing is required in non-critical areas.

Size (mm) PL6:
5000 length × 12 width × 60 height
Size (mm) PL8:
5000 length × 14 width × 80 height
Size (mm) PL10:
5000 length × 15 width × 100 height
1 unit of 50 m per box

	PL 6	PL 8	PL 10
Black	1449001	1458001	1450001
Medium grey	1449002	1458002	1450002
Silver grey	1449003	1458003	1450003
Light grey	1449004	1458004	1450004
White	1449005	1458005	1450005

NON-PVC SKIRTINGS



Finished skirtings in extruded polystyrene (HDPS) for indoor use.

Size (mm):
60 mm: 60 × 13 × 2400
80 mm: 80 × 15 × 2400
100 mm: 100 × 13 × 2400
1 box of 6 pieces

White 60 mm – 1411900
White 80 mm – 1411902
White 100 mm – 1411901

Accessories – Covings


PVC COVE FORMER




Used to form a cove where floor coverings are continued up the wall.

Size (mm) PA15: 15 × 15
1 box of 25 (50 m)
Size (mm) PA20/PA20SA: 20 × 20
Size (mm) PA25: 25 × 25
Size (mm) PA30: 30 × 30
Size (mm) PA40: 38 × 38
1 box of 30 pieces (60 m)


Dark grey

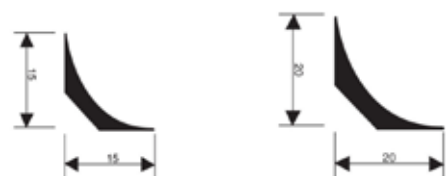


PA 15 – 26617001




PA20 – 1441000
PA20 SA – 1441001
(Self-adhesive)



PA25 – 26629001



PA30 – 1442000



PA40 – 26618001

PVC CAPPING



Used to finish the top of a resilient floor covering where it has been covered up the wall. Normally used with a cove former.

Size (mm) CAP 1: 28.5 × 2700
Size (mm) CAP 2: 18 × 2700
Size (mm) CAP 3: 27 × 2700
1 box of 25 pieces (2.7 m)



CAP 1
Medium grey – 1443000
Light grey – 1443001
White – 1443002



CAP 2
White – 1444001
Black – 1444000
Silver – 1444002




CAP 3
White – 1445001
Black – 1445000
Wood – 1445002

2 IN 1: COVER FORMER & CAPPING




Provides a neat cove that allows floor coverings to be dressed up the wall to form a skirting. This supports the floor covering at a weak point and protects the exposed edge.

Size (mm) PAD 8:
80 height × 20 depth × 2000 length
Size (mm) PAD 10:
100 height × 20 depth × 2000 length
1 box of 20 pieces (2 m)

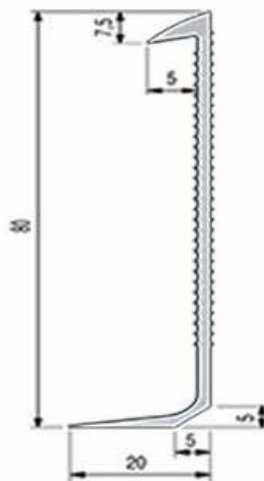


PAD 8
Light grey – 1438001
White – 1438002

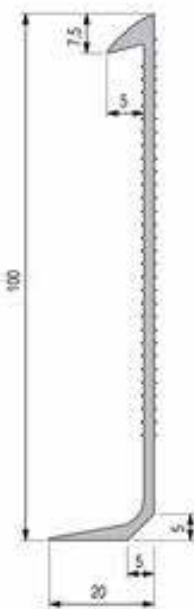


PAD 10
Light grey – 1437001
White – 1437002

Accessories – Stairs

PVC STAIR NOSE – NM

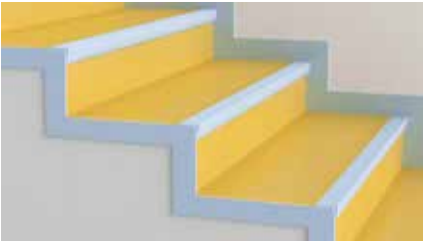


Flexible PVC stairnose. Cut to size on site and fixed with adhesive adding to the floor covering.




NM1
Specially designed for round-shaped stair noses.

Size (mm):
60 depth × 40 length
1 box of 12 pieces (36 m)



NM20
Designed for gently rounded stair noses in residential settings.

Size (mm):
45 depth × 35 length
1 box of 12 pieces (36 m)



NM45
Designed for sharp-angled stair noses.


Size (mm):
50 depth × 65 length
1 box of 12 pieces (36 m)

	NM1	NM20	NM45
Black	1401004	1404004	1403004
Medium grey	1401005	1404005	1403005
Light grey	1401006	1404006	1403006

INSIDE & OUTSIDE STAIR CORNER – SB




Corners designed to form a neat and attractive edge around the open end of a step by concealing the edge of the floor covering and stair edging.



SB1
Used to protect the bottom of the wall along the staircase.

Size (mm):
380 height × 45 depth × 380 length
1 box of 20 pieces




SB2
Used to protect the edge of the floor covering and to hide it.

Size (mm):
400 height × 60 depth × 400 length
1 box of 20 pieces

	SB1	SB2
Black	1432004	1433004
Medium grey	1432005	1433005
Light grey	1432006	1433006

ALUMINIUM STAIR NOSE – MS43

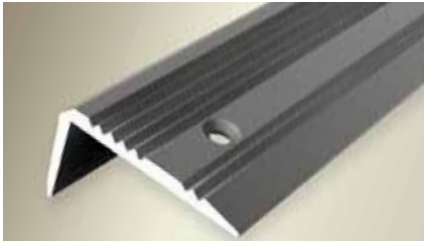


Aluminium stairnose. To be screwed over the floor covering.

Size (mm):
23 height × 40 mm depth × 2500 length
1 box of 5 pieces (2.5 m)

Aluminium – 1434101

ALUMINIUM STAIR NOSE – MSI53

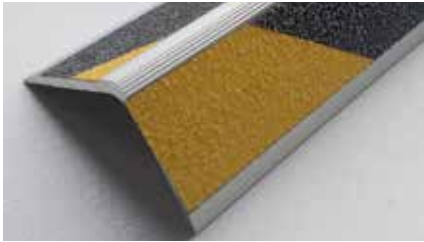

Stair nosing, grooved, for two non-slip inserts.

Size (mm):
23 height × 53 depth × 2500 length
1 box of 5 pieces (2.5 m)

Aluminium base – 1434102

Coloured abrasive slip-resistant inserts
ISP Yellow & Black – 1434103
ISP Black – 1434104

ALUMINIUM STAIR NOSE – MSI60



Stair nosing, grooved, for replaceable PVC inserts.

Size (mm):
34 height × 60 depth × 2500 length
1 box of 5 pieces (2.5 m)

Aluminium base – 1434105

Coloured plastic slip-resistant inserts
IP Yellow – 1434107
IP Black – 1434106
IP Medium Grey – 1434108
IP Light Grey – 1434109

Accessories – Accessibility

SELF-ADHESIVE WARNING TILES



Helps the user to recognise a change in level in accordance with regulatory requirements for disabled access and safety.




Size (mm): 815 × 400
10 pcs. per box



Size (mm): 1350 × 400
4 pcs. per box

	Warning tiles M	Warning tiles L
Black	1440600	1440602
Grey	1440601	1440603



RAPID'PODO – SELF-ADHESIVE



Ready to use self-adhesive warning studs kits for heavy traffic.

Stud size (mm):
25 diameter × 5 thickness
5 plates of 33 studs = 165 studs in a box
(= 120 × 40 cm)

Black – 1440610
Light grey – 1440611
Aluminium – 1440612

SELF-ADHESIVE WARNING STRIP



The marking of risers allows users to better estimate the height of the staircase and reduces the risk of falling down stairs. It makes it possible to identify the first and last step of a staircase.

Size (mm):
100 width × 0.6 thickness
Comes in 10-metre rolls

Yellow – 1257004

TACTILE TILES – SELF-ADHESIVE



Designed for visually impaired people to help them find their way using a white cane.

Size (mm): 1000 × 215
15 pcs. per box

Black – 1440604
Grey – 1440605




TACTILE STRIPS – TO BE GLUED



30 mm-wide guide rail for gluing or adhesive with installation template.

Size: 30 mm thickness
Comes in 12-metre rolls

Black – 1440606
White – 1440607

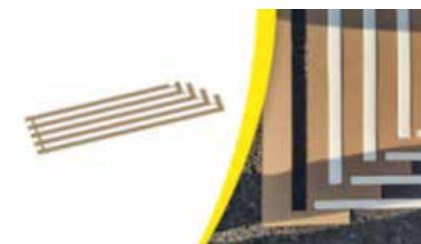


Cardboard templates

Size (mm):
620 height × 2 depth × 1160 length

Angle template for tactile strips – 1440608
Right template for tactile strips – 1440609

Accessories – Transition

TRANSITION PROFILES – EXPANSION JOINTS

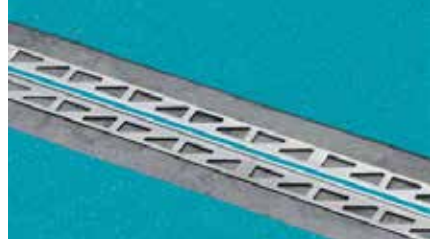

Screed and expansion joints are used in almost all types of buildings and must go down to floor height. If no joints are made, the floor covering may tear or dish, which would be complex and costly to repair.

Expansion Joints 2.2 – for compact flooring (2 mm)

Size (mm):
2 thickness × 2500 length
1 box of 10 pieces (25 m)

26600 ---*

Expansion Joints 3.7 – for acoustic floor (3/3.5 mm)

Size (mm):
3.7 thickness × 2500 height
1 box of 10 pieces (25 m)

26601 --- *

* Available on request in all colours.

TRANSITION PROFILES – PVC PROFILES – TTP



One-piece vinyl transition strip used to join different floorings of the same or slightly different heights. For gluing.

Size (mm):
30 width × 5 height × 2500 length
2 units of 25 m (50 m)

STOP TRANSITION – FT



Bendable aluminium profiles used to form a join between different types of floor coverings. Can be manually curved on-site to accommodate shaped and radius designs. For gluing.

FT 2.5 – for compact flooring

Size (mm):
18 width × 2.5 thickness × 2500 length
1 box of 10 pieces (2.5 m)

Silver – 1456100


FT 5 – for acoustic flooring

Size (mm):
18 width × 5 thickness × 2500 length
1 box of 10 pieces (2.5 m)

Silver – 1456101

Accessories – Installation


FOR GROOVING:



Fast grooving
Secure grooving: consistent groove depth regardless of pressure applied

Master turbo groover
ref. 1258100
Master turbo groover (2 pcs.)
ref. 1258101

FOR WELDING WALL COVERINGS:



Easy, safe wall welding
No risk of burning the wall covering

Turbo detail nozzle
ref 1258102

FOR HORIZONTAL INSTALLATION OF WALL COVERING:



Fast, safe installation
Up to 20% less installation time
Less muscle fatigue for installers

Wall unroller
ref. 1562010

Accessories – Overlayers

TARKOPROTECT FLEECE 180 WHITE



Tarkoprotect fleece 180 is a self-adhesive protective fleece suitable for covering and protecting various types of floors and stairs.

Size (mm):
5000 length × 100 width × 0.13 depth
1 roll of 50 m

White – 24990002

TARKOPROTECT BOARDS 600 WHITE



Tarkoprotect boards 600 is a lightweight cover panel for the temporary covering, closing off and protection buildings during various construction stages.

Size (mm):
1200 length × 800 width × 3 depth
10 pcs. per box

White – 24990003

Full design range



Excellence collection

XXL formats



XXL CARRARA GRANDE
natural – 2 × 6 m



XXL BRECCIASTONE
grey – 2 × 6 m



XXL BRECCIACINO
nude – 2 × 6 m



XXL OAK
natural – 2 × 6 m



XXL OAK
golden – 2 × 6 m

Excellence collection




UNI
deep yellow

LRV 38.5%
NCS S 2030-Y20R



UNI
deep red

LRV 16.6%
NCS S 3040-Y90R

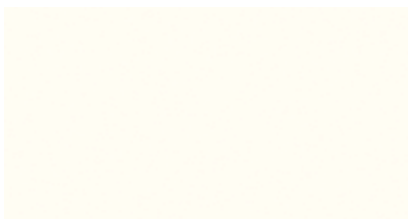


UNI
white

LRV 66.3%
NCS S 1002-Y50R




UNI
intense kaki

LRV 24.7%
NCS S 5005-G50Y

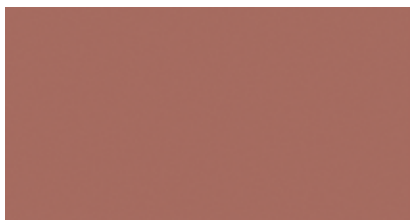

UNI
intense brick

LRV 19.2%
NCS S 4020-Y80R

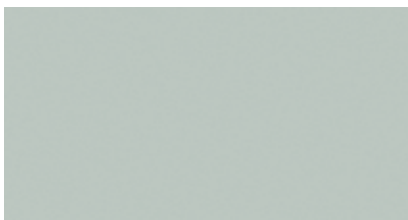

UNI
medium grey

LRV 38.0%
NCS S 3502-R50B



UNI
deep green

LRV 12.4%
NCS S 6010-B50G



UNI
dark beige

LRV 28.9%
NCS S 4005-Y20R



UNI
warm grey

LRV 19.0%
NCS S 5502-R50B



UNI
intense aqua

LRV 36.0%
NCS S 3005-B20G



UNI
dark grey

LRV 14.0%
NCS S 6005-R80B



UNI
deep blue

LRV 11.9%
NCS S 6010-R70B



UNI
black

LRV 4.9%
NCS S 8000-N

Excellence collection



GOMMETTE
multico

LRV 62.2%
NCS S 1002-Y80R



QR CODE
soft brick

LRV 57.09%
NCS S 2005-B



FRAGMENTO
deep brick

LRV 38.5%
NCS S 3020-Y80R



QUADRILLAGE
black & white

LRV 58.5%
NCS S 2002-R50B
NCS S 6502-R50B



QR CODE
soft yellow

LRV 58.8%
NCS S 1515-Y20R



FRAGMENTO
deep yellow

LRV 46.6%
NCS S 2030-Y10R



MATRIX²
light grey

LRV 45.5%
NCS S 2502-R



QR CODE
soft aqua

LRV 53.4%
NCS S 2000-N



FRAGMENTO
deep green

LRV 42.9%
NCS S 4010-B30G



MATRIX²
dark grey

LRV 17.5%
NCS S 5502-B



QR CODE
soft sky blue

LRV 52.0%
NCS S 1515-R80B



FRAGMENTO
deep turquoise

LRV 35.8%
NCS S 3010-R90B




ENCRYPTON
black & white

LRV 8.1%
NCS S 7500-N



QR CODE
soft grey


LRV 54.0%
NCS S 2502-R50B

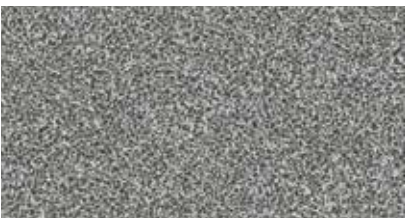

FRAGMENTO
deep black

LRV 23.9%
NCS S 6502-R50B

Excellence collection

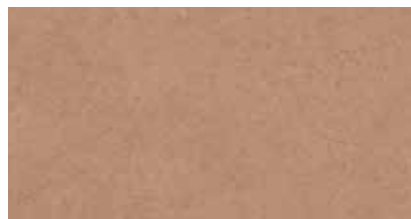


CONCRETE
brick

LRV 24.7%
NCS S 4020-Y70R




GRANITO
warm grey

LRV 36.0%
NCS S 3502-Y50R

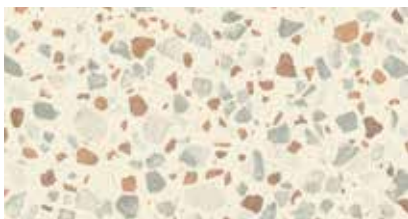

TERRAZZO GRANDE
brick

LRV 57.3%
NCS S 4010-Y70R
NCS S 1502-Y50R

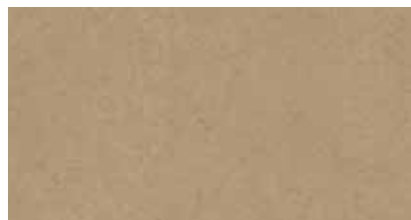

CONCRETE
ochre

LRV 26.8%
NCS S 4020-Y10R



CONCRETE
warm grey

LRV 18.0%
NCS S 6005-Y20R



TERRAZZO GRANDE
ochre

LRV 58.0%
NCS S 4010-Y30R
NCS S 1502-Y50R




CONCRETE
grey beige

LRV 32.4%
NCS S 4005-Y20R



CONCRETE
chalk

LRV 45.3%
NCS S 2502-Y50R

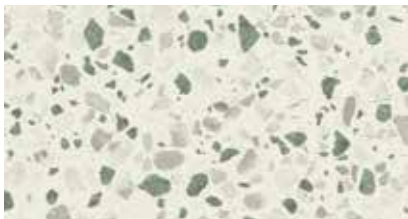

TERRAZZO GRANDE
green

LRV 59.5%
NCS S 4005-R80B
NCS S 1502-Y50R




CONCRETE
blue

LRV 26.7%
NCS S 4000-N



CONCRETE
cool grey

LRV 32.0%
NCS S 3502-Y80R

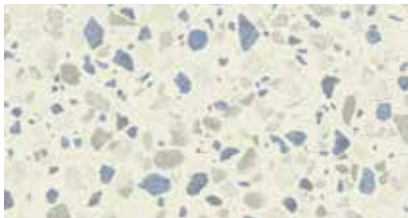

TERRAZZO GRANDE
blue

LRV 59.7%
NCS S 4005-G50Y
NCS S 1502-Y50R




CONCRETE
deep blue

LRV 10.8%
NCS S 7005-B



CONCRETE
dark grey

LRV 11.6%
NCS S 6502-Y80R

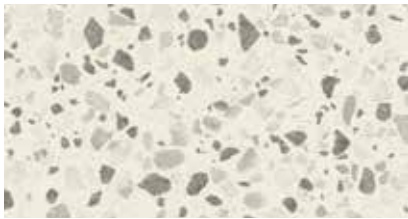

TERRAZZO GRANDE
grey

LRV 60.2%
NCS S 5502-Y80R
NCS S 1502-Y50R

Excellence collection



TISSAGE²
soft grege

LRV 37.4%
NCS S 3005-Y20R



CARPET
brick

LRV 25.7%
NCS S 5010-Y50R



TERRAZZO MURANO
terracotta

LRV 43.1%
NCS S 2502-Y50R



TISSAGE²
soft beige

LRV 43.0%
NCS S 3010-Y20R



CARPET
ochre

LRV 25.7%
NCS S 4010-Y10R



TERRAZZO MURANO
gold & silver

LRV 43.2%
NCS S 2502-Y50R



TISSAGE²
soft kaki

LRV 42.1%
NCS S 2502-Y



CARPET
moss

LRV 18.6%
NCS S 6005-G50Y



TERRAZZO MURANO
petrol

LRV 43.1%
NCS S 2502-Y50R



TISSAGE²
soft aqua

LRV 43.0%
NCS S 3005-B



CARPET
intense jean

LRV 17.8%
NCS S 5005-R80B



TERRAZZO
natural grey

LRV 45.5%
NCS S 2502-Y50R



TISSAGE²
soft grey

LRV 30.7%
NCS S 4000-N



CARPET
dark grey

LRV 19.9%
NCS S 5502-Y80R



CARPET
white grey

LRV 41.3%
NCS S 2502-Y

Excellence collection



OSB
natural

LRV 43.2%
NCS S 2010-Y20R



PLYWOOD
natural

LRV 39.4%
NCS S 3010-Y20R



OAK TREE
beige

LRV 40.7%
NCS S 3010-Y40R



OAK TREE
golden

LRV 30.9%
NCS S 4020-Y30R



SCANDINAVIAN OAK
beige

LRV 37.4%
NCS S 3010-Y30R




SCANDINAVIAN OAK
light beige

LRV 41.2%
NCS S 3005-Y20R



SCANDINAVIAN OAK
dark grey

LRV 28.7%
NCS S 5502-Y50R

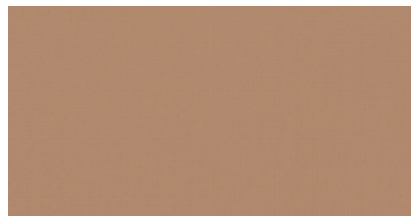

TAPPED METAL
copper

LRV 27.3%
NCS S 4020-Y40R



ESQUISSE
light grey

LRV 30.0%
NCS S 4502-Y50R



TERRAZZO CONCRETE
beige

LRV 46.6%
NCS S 2005-Y50R



TAPPED METAL
brass

LRV 32.0%
NCS S 3020-Y20R



ESQUISSE
medium grey

LRV 19.5%
NCS S 5502-R



TERRAZZO CONCRETE
grey

LRV 39.5%
NCS S 2502-Y50R



TAPPED METAL
grey

LRV 39.5%
NCS S 2502-Y50R



ESQUISSE
dark grey

LRV 12.6%
NCS S 6500-N



TERRAZZO CONCRETE
black

LRV 13.4%
NCS S 6500-N

Excellence collection



VARIANT OAK
beige

LRV 33.1%
NCS S 3010-Y40R



WOOD CHEVRON
beige

LRV 28.4%
NCS S 4020-Y30R



CHATILLON OAK
golden

LRV 23.6%
NCS S 4020-Y40R



VARIANT OAK
natural

LRV 27.8%
NCS S 4020-Y30R



OAK LONGSTRIPE
classical

LRV 23.9%
NCS S 4020-Y30R



CHATILLON OAK
natural

LRV 27.3%
NCS S 4020-Y30R



VARIANT OAK
golden

LRV 24.4%
NCS S 4020-Y30R



OAK LONGSTRIPE
classical

LRV 23.9%
NCS S 4020-Y30R



CHATILLON OAK
light brown

LRV 38.5%
NCS S 3010-Y30R



VARIANT OAK
nut

LRV 20.4%
NCS S 5010-Y30R



CHATILLON OAK
grey

LRV 23.0%
NCS S 5005-Y50R



CHATILLON OAK
white

LRV 45.3%
NCS S 2005-Y40R



VARIANT OAK
warm brown

LRV 14.9%
NCS S 6010-Y50R



VARIANT OAK
brown grey


LRV 13.5%
NCS S 6005-Y50R






CHATILLON OAK
beige

LRV 30.2%
NCS S 3010-Y30R


Platinum collection

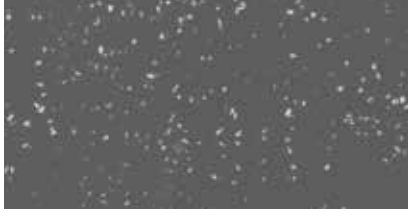		
ICE nude LRV 48.5% NCS S 2010-Y60R	ICE dark beige LRV 37.0% NCS S 3005-Y20R	ICE² black & white LRV 64.0% NCS S 1502-Y20R
		
ICE terracotta LRV 40.6% NCS S 2030-Y70R	ICE beige LRV 55.9% NCS S 2005-Y	ICE white LRV 62.9% NCS S 1505-Y20R
		
ICE fresh yellow LRV 63.4% NCS S 1030-G90Y		ICE light grey LRV 46.9% NCS S 2502-Y80R
		
ICE fresh almond LRV 44.1% NCS S 3005-G20Y	SPRINKLE cool mix LRV 64.0% NCS S 1502-Y20R	ICE medium grey LRV 33.4% NCS S 3502-Y80R
		
ICE fresh green LRV 31.4% NCS S 3010-B30G	SPRINKLE warm mix LRV 64.0% NCS S 1502-Y20R	ICE dark grey LRV 22.0% NCS S 5500-N
		
ICE fresh sky LRV 52.1% NCS S 1515-R90B	SPRINKLE neutral LRV 64.0% NCS S 1502-Y20R	ICE black LRV 13.2% NCS S 6502-R50B

Platinum collection

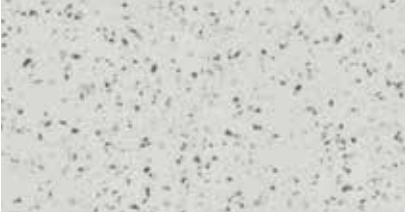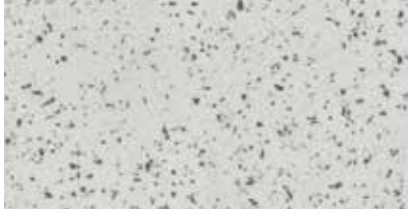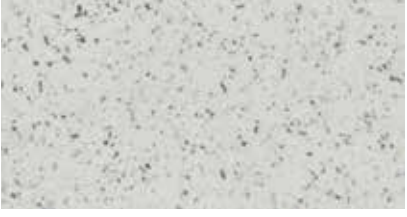		
GROUND brick LRV 22.0% NCS S 4020-Y90R	GROUND beige LRV 34.3% NCS S 4005-Y20R	PLAZZA² beige LRV 56.0% NCS S 2000-N
		
GROUND ochre LRV 29.0% NCS S 4020-Y10R	GROUND chalk LRV 57.4% NCS S 2005-Y	PLAZZA² coral LRV 56.0% NCS S 2000-N
		
GROUND kaki LRV 25.8% NCS S 5005-G50Y	GROUND light grey LRV 47.9% NCS S 3000-N	PLAZZA² ochre LRV 56.0% NCS S 2000-N
		
GROUND green LRV 17.4% NCS S 5010-B50G	GROUND medium grey LRV 32.4% NCS S 4000-N	PLAZZA² yellow LRV 56.0% NCS S 2000-N
		
GROUND light blue LRV 44.5% NCS S 3005-B50G	GROUND grey LRV 18.4% NCS S 5502-B	PLAZZA² green LRV 56.0% NCS S 2000-N
		
GROUND blue LRV 17.1% NCS S 5020-R90B	PLAZZA² black LRV 56.0% NCS S 2000-N	PLAZZA² dark blue LRV 56.0% NCS S 2000-N

ProtectWall collection

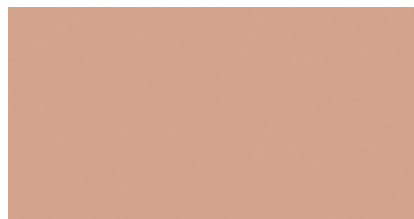

UNI
terracotta

LRV 31.11%
NCS S 3020-Y60R




UNI
grege

LRV 40.75%
NCS S 3005-Y20R



UNI
ochre

LRV 51.06%
NCS S 2020-Y20R

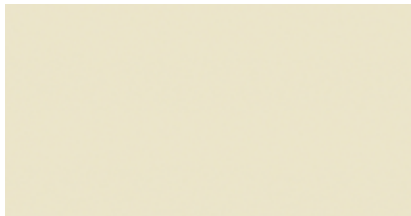


UNI
linen

LRV 57.94%
NCS S 2005-Y




GEMSTONE
pastel

LRV 71.62%
NCS Background: S 1002-Y50R
NCS Pattern 1: S 3030-R
NCS Pattern 2: S 3030-Y10R
NCS Pattern 3: S 4502-Y80R

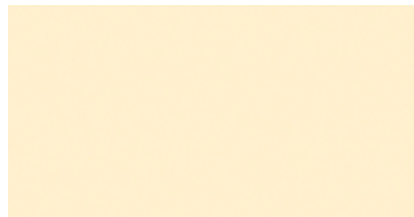

UNI
light beige

LRV 69.91%
NCS S 1005-Y20R

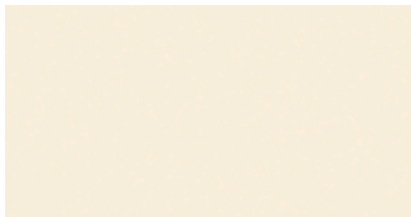

UNI
white grey

LRV 70.27%
NCS S 1002-Y50R




PALM
kaki

LRV 66.69%
NCS Background: S 0502-G50Y
NCS Pattern: S 2010-G40Y




UNI
kaki

LRV 37.91%
NCS S 3010-G40Y

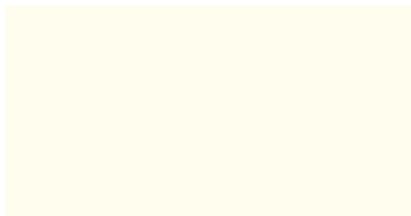


UNI
super white

LRV 87.26%
NCS S 0500-N

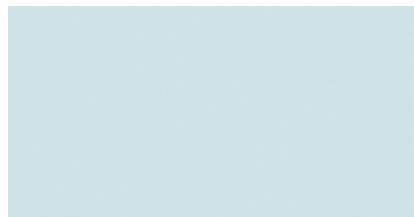

UNI
white blue

LRV 57.32%
NCS S 1510-B



UNI
super white CR

LRV 88.22%
NCS S 0502-G50Y



PALM
shadow

LRV 78.74%
NCS Background: S 0502-G50Y
NCS Pattern: S 2002-Y20R



UNI
aqua

LRV 34.76%
NCS S 3010-B50G



UNI
sweet grey CR

LRV 50.96%
NCS S 2502-Y20R

ProtectWall collection



PLYWOOD
natural

LRV 48.94%
NCS Background: S 2010-Y20R
NCS Pattern: S 3010-Y30R



RUSTIC VELVET
copper

LRV 57.94%
NCS S 1505-Y



TWEED
ochre

LRV 59.92%
NCS S 1510-Y20R



OAK TREE
natural

LRV 39.53%
NCS S 3010-Y30R



LUXURY CONCRETE
golden

LRV 40.90%
NCS S 3005-Y




TWEED
warm grey

LRV 61.50%
NCS S 1520-Y20R



TISSE
grey beige

LRV 51.93%
NCS S 2005-Y20R

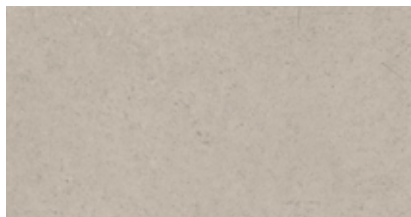

CONCRETE
cool grey

LRV 35.34%
NCS S 3502-Y50R




BRECCIASTONE
grey

LRV 38.24%
NCS S 3502-Y20R



MARBLE
carrare

LRV 82.72%
NCS S 0502-G50Y

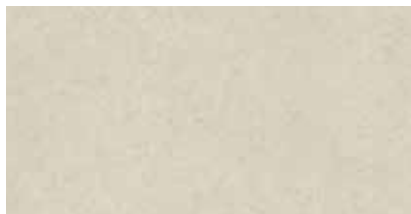

CONCRETE
mastic

LRV 54.30%
NCS S 2002-Y

Excellence collection				Accent Excellence Compact+ Tapiflex Excellence Acoustic 19 dB (to be glued)		Accent Excellence Genius Tapiflex Excellence Genius (loose-lay)		Tapiflex Excellence Acoustic 17 dB	Matching welding rods		Skirtings
Design	Colour	NCS	LRV (%)	Accent (Compact+) A	Tapiflex (Acoustic 19 dB) T19	Accent (Genius) G	Tapiflex (Genius) G	Tapiflex (Acoustic 17 dB) T17	Unicolour	Multicolour	Decorative / KS61
CARPET	brick	S 5010-Y50R	25.7	206012 018	206017 018	—	—	—	1287806	—	206009039
	dark grey	S 5502-Y80R	19.9	206012 019	206017 019	—	—	—	1287533	—	206009008
	intense jean	S 5005-R80B	17.8	206012 001	206017 001	206038 001	206039 001	206021 001	1287528	—	206009037
	moss	S 6005-G50Y	18.6	206012 020	206017 020	—	—	—	1287294	—	206009038
	ochre	S 4010-Y10R	25.7	206012 021	206017 021	—	—	—	1287373	—	206009012
	white grey	S 2502-Y	41.3	206012 002	206017 002	206038 002	206039 002	206021 002	1287716	—	206009033
CHATILLON OAK	beige	S 3010-Y30R	30.2	206012 077	206017 077	206038 077	206039 077	206021 077	1287005	1290137	—
	golden	S 4020-Y40R	23.6	206012 078	206017 078	—	—	—	1294428	1290301	1411052
	grey	S 5005-Y50R	23.0	206012 079	206017 079	206038 079	206039 079	206021 079	1287604	1290194	—
	light brown	S 3010-Y30R	38.5	206012 080	206017 080	—	—	—	1294852	1290368	—
	natural	S 4020-Y30R	27.3	206012 081	206017 081	206038 081	206039 081	206021 081	1287153	1290303	1411052
	white	S 2005-Y40R	45.3	206012 082	206017 082	—	—	—	1287764	1290159	—
CONCRETE	blue	S 4000-N	26.7	206012 022	206017 022	—	—	—	1292767	—	1411053
	brick	S 4020-Y70R	24.7	206012 023	206017 023	—	—	—	1287955	—	206009039
	chalk	S 2502-Y50R	45.3	206012 003	206017 003	206038 003	206039 003	206021 003	1287290	—	206009033
	cool grey	S 3502-Y80R	32.0	206012 004	206017 004	206038 004	206039 004	206021 004	1287789	—	1411053
	dark grey	S 6502-Y80R	11.6	206012 005	206017 005	206038 005	206039 005	206021 005	1287585	—	206009006
	deep blue	S 7005-B	10.8	206012 024	206017 024	—	—	—	1287077	—	206009037
	grey beige	S 4005-Y20R	32.4	206012 006	206017 006	206038 006	206039 006	206021 006	1287713	—	206009013
	ochre	S 4020-Y10R	26.8	206012 025	206017 025	206038 025	206039 025	206021 025	1287690	—	206009012
	warm grey	S 6005-Y20R	18.0	206012 008	206017 008	206038 008	206039 008	206021 008	1287870	—	206009014
ENCRYPTION	black & white	S 7500-N	8.1	206012 009	206017 009	—	—	—	1287835	—	206009005
ESQUISSE	dark grey	S 6500-N	12.6	206012 010	206017 010	—	—	—	1287548	—	206009006
	light grey	S 4502-Y50R	30.0	206012 011	206017 011	206038 011	206039 011	206021 011	1287854	—	206009009
	medium grey	S 5502-R	19.5	206012 026	206017 026	206038 026	206039 026	206021 026	1287832	—	206009006
FRAGMENTO	deep black	S 6502-R50B	23.9	206012 034	206017 034	—	—	—	1287844	—	206009005
	deep brick	S 3020-Y80R	38.5	206012 035	206017 035	—	—	—	1291916	—	206009039
	deep green	S 4010-B30G	42.9	206012 036	206017 036	—	—	—	1292655	—	1411056
	deep turquoise	S 3010-R90B	35.8	206012 037	206017 037	—	—	—	1291210	—	206009037
	deep yellow	S 2030-Y10R	46.6	206012 038	206017 038	—	—	—	1287651	—	206009031
GOMMETTE	multico	S 1002-Y80R	62.2	206012 027	206017 027	—	—	—	1287946	—	206009004
GRANITO	warm grey	S 3502-Y50R	36.0	206012 028	206017 028	206038 028	206039 028	206021 028	1287530	—	206009033
MATRIX*	dark grey	S 5502-B	17.5	206012 031	206017 031	—	—	—	1287631	—	206010033
	light grey	S 2502-R	45.5	206012 032	206017 032	—	—	—	1287523	—	206009009
OAK LONGSTRIPE	classical	S 4020-Y30R	23.9	206012 090	206017 090	206038 090	206039 090	206021 090	1294428	1290103	1411052
OAK TREE	beige	S 3010-Y40R	40.7	206012 012	206017 012	—	—	—	1287432	1290294	—
	golden	S 4020-Y30R	30.9	206012 091	206017 091	—	—	—	1287690	1290303	1411052
OSB	natural	S 2010-Y20R	43.2	206012 033	206017 033	—	—	—	1287686	1290407	—
PLYWOOD	natural	S 3010-Y20R	39.4	206012 039	206017 039	—	—	—	1287391	1290143	—
QR CODE	soft aqua	S 2000-N	53.4	206012 040	206017 040	—	—	—	1287875	—	206009004
	soft brick	S 1505-Y70R	63.0	206012 041	206017 041	—	—	—	1291961	—	206009004
	soft grey	S 2502-R50B	54.0	206012 042	206017 042	—	—	—	1294680	—	206009004
	soft sky blue	S 1515-R80B	52.0	206012 043	206017 043	—	—	—	1287902	—	206009004
QUADRILLAGE	soft yellow	S 1515-Y20R	58.8	206012 044	206017 044	—	—	—	1287771	—	206009004
SCANDINAVIAN	black & white	S 2002-R50B / S6502-R50B	58.5	206012 045	206017 045	—	—	—	1292459	—	206009005
OAK	beige	S 3010-Y30R	37.4	206012 083	206017 083	206038 083	206039 083	206021 083	1287432	—	—
	dark grey	S 5502-Y50R	28.7	206012 013	206017 013	—	—	—	1287828	1290294	—
	light beige	S 3005-Y20R	41.2	206012 014	206017 014	206038 014	206039 014	206021 014	1287637	1290377	—

Excellence collection				Accent Excellence Compact+ Tapiflex Excellence Acoustic 19 dB (to be glued)		Accent Excellence Genius Tapiflex Excellence Genius (loose-lay)		Tapiflex Excellence Acoustic 17 dB	Matching welding rods		Skirtings
Design	Colour	NCS	LRV (%)	Accent (Compact+) A	Tapiflex (Acoustic 19 dB) T19	Accent (Genius) G	Tapiflex (Genius) G	Tapiflex (Acoustic 17 dB) T17	Unicolour	Multicolour	Decorative / KS61
TAPPED METAL	brass	S 3020-Y20R	32.0	206012 046	206017 046	—	—	—	1287960	—	206009012
	copper	S 4020-Y40R	27.3	206012 047	206017 047	—	—	—	1287257	—	206009032
	grey	S 2502-Y50R	39.5	206012 015	206017 015	—	—	—	1287454	—	206010033
TERRAZZO	natural grey	S 2502-Y50R	45.5	206012 059	206017 059	—	—	—	1291214	—	206009033
TERRAZZO CONCRETE	beige	S 2005-Y50R	46.6	206012 048	206017 048	206038 048	206039 048	206021 048	1287290	—	206009033
	black	S 6500-N	13.4	206012 049	206017 049	—	—	—	1287392	—	206009006
	grey	S 2502-Y50R	39.5	206012 050	206017 050	206038 050	206039 050	206021 050	1291215	—	1411053
TERRAZZO GRANDE	blue	S 4005-G50Y / S 1502-Y50R	59.7	206012 052	206017 052	—	—	—	1287838	—	206009010
	brick	S 4010-Y70R / S 1502-Y50R	57.3	206012 051	206017 051	—	—	—	1287838	—	206009010
	green	S 4005-R80B / S 1502-Y50R	59.5	206012 053	206017 053	—	—	—	1287838	—	206009010
	grey	S 5502-Y80R / S 1502-Y50R	60.2	206012 054	206017 054	206038 054	206039 054	206021 054	1287838	—	206009010
	ochre	S 4010-Y30R / S 1502-Y50R	58.0	206012 055	206017 055	—	—	—	1287838	—	206009010
TERRAZZO MURANO	gold & silver	S 2502-Y50R	43.2	206012 056	206017 056	—	—	—	1287290	—	206009033
	petrol	S 2502-Y50R	43.1	206012 057	206017 057	—	—	—	1287290	—	206009033
	terracotta	S 2502-Y50R	43.1	206012 058	206017 058	—	—	—	1287290	—	206009033
TISSAGE²	soft aqua	S 3005-B	43.0	206012 060	206017 060	—	—	—	1292155	—	206009034
	soft beige	S 3010-Y20R	43.0	206012 016	206017 016	—	—	—	1287078	—	206009011
	soft Greige	S 3005-Y20R	37.4	206012 017	206017 017	—	—	—	1287572	—	206009033
	soft grey	S 4000-N	30.7	206012 061	206017 061	—	—	—	1287831	—	206009008
	soft kaki	S 2502-Y	42.1	206012 062	206017 062	—	—	—	1291214	—	206009038
UNI	black	S 8000-N	4.9	206012 063	206017 063	—	—	—	1292206	—	206009005
	dark beige	S 4005-Y20R	28.9	206012 064	206017 064	—	—	—	1287830	—	206009013
	dark grey	S 6005-R80B	14.0	206012 065	206017 065	—	—	—	1287077	—	206010033
	deep blue	S 6010-R70B	11.9	206012 066	206017 066	—	—	—	1287956	—	206009037
	deep green	S 6010-B50G	12.4	206012 067	206017 067	—	—	—	1287957	—	1411056
	deep red	S 3040-Y90R	16.6	206012 068	206017 068	—	—	—	1288359	—	206009035
	deep yellow	S 2030-Y20R	38.5	206012 069	206017 069	—	—	—	1287884	—	206009031
	intense aqua	S 3005-B20G	36.0	206012 070	206017 070	—	—	—	1292655	—	206009034
	intense brick	S 4020-Y80R	19.2	206012 071	206017 071	—	—	—	1287959	—	206009039
	intense kaki	S 5005-G50Y	24.7	206012 072	206017 072	—	—	—	1287958	—	206009038
	medium grey	S 3502-R50B	38.0	206012 073	206017 073	—	—	—	1292388	—	206009009
	warm grey	S 5502-R50B	19.0	206012 074	206017 074	—	—	—	1287394	—	206009008
	white	S 1002-Y50R	66.3	206012 075	206017 075	—	—	—	1288126	—	206009004
VARIANT OAK	beige	S 3010-Y40R	33.1	206012 084	206017 084	206038 084	206039 084	206021 084	1287437	1290294	—
	brown grey	S 6005-Y50R	13.5	206012 085	206017 085	206038 085	206039 085	206021 085	1287546	1290309	—
	golden	S 4020-Y30R	24.4	206012 086	206017 086	206038 086	206039 086	206021 086	1292373	1290187	1411052
	natural	S 4020-Y30R	27.8	206012 088	206017 088	206038 088	206039 088	206021 088	1292373	1290303	1411052
	nut	S 5010-Y30R	20.4	206012 087	206017 087	206038 087	206039 087	206021 087	1294428	1290311	—
	warm brown	S 6010-Y50R	14.9	206012 089	206017 089	—	—	—	1287780	1290216	—
WOOD CHEVRON	beige	S 4020-Y30R	28.4	206012 076	206017 076	—	—	—	1287153	1290303	—
XXL BRECCIACINO	nude	—	—	206046 097	206047 097	—	—	—	—	—	
XXL BRECCIASTONE	grey	—	—	206046 095	206047 095	—	—	—	—	—	
XXL CARRARA GRANDE	natural	—	—	206046 096	206047 096	—	—	—	—	—	
XXL OAK	golden	—	—	206046 094	206047 094	—	—	—	—	—	—
	natural	—	—	206046 093	206047 093	—	—	—	—	—	—

Platinum collection				Accent Platinum	Tapiflex Platinum	Matching welding rods		Skirtings
Design	Colour	NCS	LRV (%)	Accent (Compact) A	Tapiflex (Acoustic 17 dB) T	Unicolour	Multicolour	Decorative / KS61
GROUND	beige	S 4005-Y20R	34.3	206027 303	206029 303	1287963	26761147	206009013
	blue	S 5020-R90B	17.1	206027 304	206029 304	1287023	26761151	206009037
	brick	S 4020-Y90R	22.0	206027 305	206029 305	1289006	26761148	206009039
	chalk	S 2005-Y	57.4	206027 306	206029 306	1291810	26761146	206009033
	green	S 5010-B50G	17.4	206027 307	206029 307	1287961	26761152	1411056
	grey	S 5502-B	18.4	206027 308	206029 308	1287631	26761145	206010033
	kaki	S 5005-G50Y	25.8	206027 309	206029 309	1287958	26761150	206009038
	light blue	S 3005-B50G	44.5	206027 302	206029 302	1292655	26761157	206009034
	light grey	S 3000-N	47.9	206027 300	206029 300	1287638	26761158	206009009
	medium grey	S 4000-N	32.4	206027 301	206029 301	1292767	26761156	206009008
	ochre	S 4020-Y10R	29.0	206027 310	206029 310	1287153	26761149	206009012
ICE	beige	S 2005-Y	55.9	206027 311	206029 311	1287962	26761136	206009033
	black	S 6502-R50B	13.2	206027 312	206029 312	1287836	26761132	206009006
	dark beige	S 3005-Y20R	37.0	206027 313	206029 314	1287178	26761143	206009013
	dark grey	S 5500-N	22.0	206027 314	206029 315	1287454	26761134	206009008
	fresh almond	S 3005-G20Y	44.1	206027 315	206029 316	1287964	26761139	206009004
	fresh green	S 3010-B30G	31.4	206027 316	206029 317	1287965	26761141	206009004
	fresh sky	S 1515-R90B	52.1	206027 317	206029 318	1287939	26761140	206009004
	fresh yellow	S 1030-G90Y	63.4	206027 318	206029 319	1287587	26761138	206009004
	light grey	S 2502-Y80R	46.9	206027 319	206029 320	1287821	26761133	206009004
	medium grey	S 3502-Y80R	33.4	206027 320	206029 321	1287532	26761142	206009009
	nude	S 2010-Y60R	48.5	206027 321	206029 322	1291983	26761144	1411032
	terracotta	S 2030-Y70R	40.6	206027 322	206029 323	1287966	26761137	206009039
	white	S 1505-Y20R	62.9	206027 323	206029 324	1291609	26761135	206009004
ICE²	black & white	S 1502-Y20R	64.0	206027 324	206029 313	1291609	26761131	206009005
PLAZZA²	beige	S 2000-N	56.0	206027 325	206029 325	1287846	26761124	206009010
	black	S 2000-N	56.0	206027 326	206029 326	1287846	26761125	206009010
	coral	S 2000-N	56.0	206027 327	206029 327	1287846	26761126	206009010
	dark blue	S 2000-N	56.0	206027 328	206029 328	1287846	26761127	206009010
	green	S 2000-N	56.0	206027 329	206029 329	1287846	26761128	206009010
	ochre	S 2000-N	56.0	206027 330	206029 330	1287846	26761129	206009010
	yellow	S 2000-N	56.0	206027 331	206029 331	1287846	26761130	206009010
SPRINKLE	cool mix	S 1502-Y20R	64.0	206027 332	206029 332	1291609	26761155	206009010
	neutral	S 1502-Y20R	64.0	206027 333	206029 333	1291609	26761153	206009010
	warm mix	S 1502-Y20R	64.0	206027 334	206029 334	1291609	26761154	206009010

ProtectWall collection

Design	Colour	NCS	LRV (%)	ProtectWALL	ProtectWALL CleanRoom	Matching welding rods
BRECCIASTONE	grey	S 3502-Y20R	38.24	264993 106	—	24806 200
CONCRETE	cool grey	S 3502-Y50R	35.34	264991 058	—	24806 117
	mastic	S 2002-Y	54.30	264991 074	—	24806 201
GEMSTONE	pastel	Background: S 1002-Y50R Pattern 1: S 3030-R Pattern 2: S 3030-Y10R Pattern 3: S 4502-Y80R	71.62	264991 094	— — — —	24806 202
LUXURY CONCRETE	golden	S 3005-Y	40.90	264991 096	—	24806 203
MARBLE	carrare	S 0502-G50Y	82.72	264991 064	—	24806 124
OAK TREE	natural	S 3010-Y30R	39.53	264991 075	—	24806 204
PALM	kaki	Background: S 0502-G50, Pattern: S 2010-G40Y	66.69	264991 095	—	24806 205
	shadow	Background: S 0502-G50Y, Pattern: S 2002-Y20R	78.74	264991 091	—	24806 206
PLYWOOD	natural	Background: S 2010-Y20R, Pattern: S 3010-Y30R	48.94	264993 104	—	24806 207
RUSTIC VELVET	copper	S 1505-Y	57.94	264991 097	—	24806 208
TISSE	grey beige	S 2005-Y20R	51.93	264991 057	—	24806 127
TWEED	ochre	S 1510-Y20R	59.92	264991 087	—	24806 210
	warm grey	S 1520-Y20R	61.50	264991 088	—	24806 209
UNI	aqua	S 3010-B50G	34.76	264991 083	—	24806 211
	greige	S 3005-Y20R	40.75	264991 098	—	24806 212
	kaki	S 3010-G40Y	37.91	264991 084	—	24806 213
	light beige	S 1005-Y20R	69.91	264991 080	—	24806 147
	linen	S 2005-Y	57.94	264991 100	—	24806 214
	ochre	S 2020-Y20R	51.06	264991 085	—	24806 215
	super white	S 0500-N	87.26	264991 077	—	24806 161
	super white	S 0502-G50Y	88.22	—	264992 061	24806 161
	sweet grey	S 2502-Y20R	50.96	—	264992 082	24806 216
	terracotta	S 3020-Y60R	31.11	264991 101	—	24806 217
	white blue	S 1510-B	57.32	264991 081	—	24806 156
	white grey	S 1002-Y50R	70.27	264991 079	—	24806 162


Tapiflex Stairs collection

Design	Colour	NCS	LRV (%)	LRV (%)	CONTRAST RATE	TX STAIRS	TX STAIRS SELF-ADHESIVE
CONCRETE STAIRS	chalk	S2502-Y50R / S7502-R	45.3	8.5	81%	206053002	—
	cool grey	S3502-Y80R / S7502-R	32	8.5	73%	206053001	206054017
	dark grey	S6502-Y80R / S4500-N	11.6	42	72%	206053003	206054016
ESQUISSE STAIRS	dark grey	S6500-N / S4500-N	12.6	42	70%	206053004	—
	light grey	S4502-Y50R / S7502-R	30	8.5	72%	206053005	—
OAK TREE STAIRS	beige	S3010-Y40R / S7502-R	40.7	8.5	79%	206053006	206054018
	golden	S4020-Y30R / S7502-R	30.9	8.5	72%	206053008	—
	grey	S5005-Y20R / S7502-R	28	8.5	70%	206053007	—
TAPPED METAL STAIRS	grey	S5502-R50B / S4500-N	20	42	52%	206053015	—
TERRAZZO STAIRS	natural grey	S2502-Y50R / S7502-R	45.5	8.5	81%	206053014	—
TISSAGE² STAIRS	soft Greige	S3005-Y20R / S7502-R	37.4	8.5	77%	206053009	—
UNI STAIRS	dark beige	S4005-Y20R / S7502-R	28.9	8.5	71%	206053010	—
	deep yellow	S2030-Y20R / S7502-R	38.5	8.5	78%	206053012	—
	grey	S6005-R80B / S4500-N	12	42	71%	206053011	206054019
	medium grey	S3502-R50B / S7502-R	38	8.5	78%	206053013	206054020

Excellence – Technical Data

TECHNICAL DATA	STANDARD	TAPIFLEX EXCELLENCE 19 dB	TAPIFLEX EXCELLENCE 17 dB	ACCZENT EXCELLENCE COMPACT+	TAPIFLEX EXCELLENCE GENIUS	ACCZENT EXCELLENCE GENIUS
Classification	Norm	Tarkett value	Tarkett value	Tarkett value	Tarkett value	Tarkett value
Product type	EN ISO 11638	Polyvinyl chloride floor coverings with foam layer	Polyvinyl chloride floor coverings with foam layer	Polyvinyl chloride floor coverings with foam layer	Polyvinyl chloride floor coverings with foam layer	–
	EN ISO 10582	–	–	–	–	Heterogeneous poly(vinyl chloride) floor coverings
Commercial classification	EN ISO 10874	34 Very Heavy	34 Very Heavy	34 Very Heavy	34 Very Heavy	34 Very Heavy
Industrial classification	EN ISO 10874	42 General	42 General	43 Heavy	42 General	43 Heavy
Binder content	EN ISO 11638	Type I	Type I	Type I	Type I	–
Binder content	EN ISO 10582	–	–	–	–	Type I
Technical Characteristics	Norm	Tarkett value	Tarkett value	Tarkett value	Tarkett value	Tarkett value
Wear layer thickness	EN ISO 24340	0.80 mm	0.70 mm	0.80 mm	0.70 mm	0.70 mm
Total thickness	EN ISO 24346	3.25 mm	2.9 mm	2.15 mm	3.50 mm	2.45 mm
Total weight	EN ISO 23997	3250 g/m²	3000 g/m²	2750 g/m²	3680 g/m²	3400 g/m²
Surface treatment		Tektanium®	Tektanium®	Tektanium®	Tektanium®	Tektanium®
Installation method		Glue-down	Glue-down	Glue-down	Loose-lay	Loose-lay
Performance for CE Marking	Norm	Tarkett value	Tarkett value	Tarkett value	Tarkett value	Tarkett value
Declaration of Performance	EN 14041	0120-074-DoP-2024-01	0120-101-DoP-2023-07	0120-103-DoP-2023-06	0120-093-DoP-2019-12	0120-092-DoP-2019-12
Reaction to fire	EN ISO 13501-1	B _r -s1 glued over any A2 _s or A1 _s substrate (concrete) C _r -s1 glued over any derivate wood substrate	B _r -s1 glued over any A2 _s or A1 _s substrate (concrete) C _r -s1 glued over any derivate wood substrate	B _r -s1 glued over any A2 _s or A1 _s substrate (concrete) B _r -s1 glued over any derivate wood substrate	C _r -s1 loose-lay on an A1 _s and / or A2 _s substrate (concrete) C _r -s1 loose-lay on a wooden sub-floor	B _r -s1 loose-lay on an A1 _s and / or A2 _s substrate (concrete) C _r -s1 loose-lay on a wooden sub-floor
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)	Antistatic (≤ 2 kV)	Antistatic (≤ 2 kV)	Antistatic (≤ 2 kV)	Antistatic (≤ 2 kV)
Thermal resistance	EN ISO 10456	0.04 m²·K/W	0.04 m²·K/W	0.04 m²·K/W	0.04 m²·K/W	0.02 m²·K/W
Slip resistance	EN 13893	Class DS (μ ≥ 0.30)	Class DS (μ ≥ 0.30)	Class DS (μ ≥ 0.30)	Class DS (μ ≥ 0.30)	Class DS (μ ≥ 0.30)
Technical Performances	Norm	Tarkett value	Tarkett value	Tarkett value	Tarkett value	Tarkett value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.20 mm Average measured value*: 0.10 mm	Required value: ≤ 0.20 mm Average measured value*: 0.05 mm	Required value: ≤ 0.20 mm Average measured value*: 0.03 mm	Required value: ≤ 0.20 mm Average measured value*: 0.12 mm	Required value: ≤ 0.10 mm Average measured value*: 0.03 mm
Dimensional stability	EN ISO 23999	Required value: ≤ 0.40% Average measured value: ≤ 0.10%	Required value: ≤ 0.40% Average measured value: ≤ 0.10%	Required value: ≤ 0.40% Average measured value: ≤ 0.10%	Required value: ≤ 0.40% Average measured value: ≤ 0.10%	Required value: ≤ 0.40% Average measured value: ≤ 0.10%
Impact sound reduction – ΔL _w	EN ISO 717 / 2	19 dB	17 dB	8 dB	19 dB	4 dB
Reduction of in-room impact noise	NF S31-074	L _{w,eq} < 65 dB – Class A	L _{w,eq} < 65 dB – Class A	L _{w,eq} < 75 dB – Class B	L _{w,eq} < 65 dB – Class A	L _{w,eq} < 85 dB – Class C
Slip resistance ⁽¹⁾	DIN EN 16165	R10	R10	R10	R10	R10
Furniture leg	EN ISO 16581	No damage	No damage	No damage	No damage	No damage
Castor chair	EN ISO 4918	No damage	No damage	No damage	No damage	No damage
Cur! resultant to heat	EN ISO 23999	≤ 8 mm	≤ 8 mm	≤ 8 mm	≤ 3 mm	≤ 2 mm
Colour fastness to light	EN ISO 105-B02	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Not affected	Not affected	Not affected	Not affected	Not affected
Underfloor heating		Suitable	Suitable	Suitable	Suitable	Suitable
Sustainability Performances	Norm	Tarkett value	Tarkett value	Tarkett value	Tarkett value	Tarkett value
Recyclability through ReStart®		Recyclable	Recyclable	Recyclable	Recyclable	Recyclable
Total VOC emissions	EN 16516	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)
Formaldehyde emission class	EN 717-1	E1	E1	E1	E1	E1
Dimensions and designs	Norm	Tarkett value	Tarkett value	Tarkett value	Tarkett value	Tarkett value
Roll		23 × 2 m	23 × 2 m	23 × 2 m	23 × 2 m	23 × 2 m
Number of designs available		88 + 5 XXL	25	88 + 5 XXL	25	25

The above information is subject to modification for the benefit of further improvement. (01/24).
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com.
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

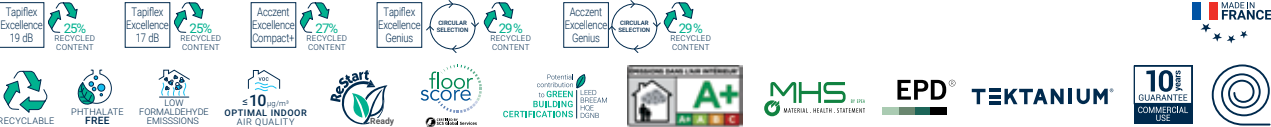

Platinum – Technical Data

TECHNICAL DATA	STANDARD	TAPIFLEX PLATINIUM (SHEET)	ACCZENT PLATINIUM (SHEET)
Classification	Norm	Tarkett Value	Tarkett Value
Product type	EN ISO 11638	Polyvinyl chloride floor coverings with foam layer	Polyvinyl chloride floor coverings with foam layer
Commercial classification	EN ISO 10874	34 Very Heavy	34 Very Heavy
Industrial classification	EN ISO 10874	42 General	43 Heavy
Wear layer binder content	EN ISO 11638	Type I	Type I
Technical Characteristics	Norm	Tarkett Value	Tarkett Value
Wear layer thickness	EN ISO 24340	1.02 mm	1.02 mm
Total thickness	EN ISO 24346	3.10 mm	2.45 mm
Total weight	EN ISO 23997	3250 g/m²	3200 g/m²
Surface treatment		Tektanium®	Tektanium®
Installation method		Glue-down	Glue-down
Performance for CE Marking	Norm	Tarkett Value	Tarkett Value
Declaration of Performance	EN 14041	0120-082-DoP-2019-07	0120-083-DoP-2019-07
Reaction to fire	EN 13501-1	B _r -s1 glued over any A2 _s or A1 _s substrate (concrete) C _r -s1 glued over any derivate wood substrate	B _r -s1 glued over any A2 _s or A1 _s substrate (concrete) B _r -s1 glued over any derivate wood substrate
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)	Antistatic (≤ 2 kV)
Thermal resistance	EN ISO 10456	0.04 m²·K/W	0.02 m²·K/W
Slip resistance	EN 13893	Class DS (μ ≥ 0.30)	Class DS (μ ≥ 0.30)
Technical Performances	Norm	Tarkett Value	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.20 mm Average measured value*: 0.10 mm	Required value: ≤ 0.20 mm Average measured value*: 0.04 mm
Dimensional stability	EN ISO 23999	Average measured value: ≤ 0.10%	Average measured value: ≤ 0.10%
Impact sound reduction – ΔL _w	NF EN ISO 717 / 2	17 dB	9 dB
Reduction of in-room impact noise	NF S31-074	L _{w,eq} < 65 dB – Class A	L _{w,eq} < 75 dB – Class B
Slip resistance ⁽¹⁾	DIN 51130	R10	R10
Furniture leg	EN ISO 16581	No damage	No damage
Castor chair	EN ISO 4918	No damage	No damage
Cur! resultant to heat	EN ISO 23999	≤ 8 mm	≤ 8 mm
Colour fastness to light	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Not affected	Not affected
Underfloor heating		Suitable (subfloor temperature maximum 27°C)	Suitable (subfloor temperature maximum 27°C)
Sustainability performances	Norm	Tarkett Value	Tarkett Value
Recyclability through ReStart®		Recyclable	Recyclable
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m³)	Platinum (≤ 10 µg/m³)
Formaldehyde emission class	EN 717-1	E1	E1
Dimensions and designs	Norm	Tarkett Value	Tarkett Value
Roll		2 × 23 m	2 × 23 m
Number of designs available		35	35

The above information is subject to modification for the benefit of further improvement. (01/24).
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com.
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



ProtectWall – Technical Data

TECHNICAL DATA	STANDARD	PROTECTWALL 1.5 B-S2	PROTECTWALL CLEAN ROOM
Classification	Norm	Tarkett Value	Tarkett Value
Product type	EN 259-1	Heavy duty wall covering	Heavy duty wall covering
	EN 14644-1	–	Cleanroom suitable Designed with a dedicated embossing to ensure hygiene in Cleanroom
Technical Characteristics	Norm	Tarkett Value	Tarkett Value
Total thickness	EN ISO 24346	1.50 mm	1.50 mm
Total weight	EN ISO 23997	2400 g/m²	2400 g/m²
Wear layer thickness	EN ISO 24340	0.15 mm	0.15 mm
Surface treatment		Top Clean XP™	Top Clean XP™
Installation method		Glue-down	Glue-down
Performance for CE Marking	Norm	Tarkett Value	Tarkett Value
Declaration of Performance	EN 15102	0132-0065-DoP-2022-10	0132-0065-DoP-2022-10
Reaction to fire	EN 13501-1	B-s2,d0 glued on any non-metal A1 or A2-s1,d0 class substrate	B-s2,d0 glued on any non-metal A1 or A2-s1,d0 class substrate
Technical Performances	Norm	Tarkett Value	Tarkett Value
Colour fastness to light	EN ISO 105-B02	≥ 6	≥ 6
Impact Resistance	EN 259-2	Resistant to impacts No visible burst nor crack	Resistant to impacts No visible burst nor crack
Chemical resistance	ISO 26987	Not affected	Not affected
Spongeability, washability, lyability, brushability	EN 12956	Super washable and brushable	Super washable and brushable
Determination of flexibility	ISO 24344	No damage, no crack	No damage, no crack
Seam strength	ISO 16906	Average Value: ≥ 250 N/50 mm	Average Value: ≥ 250 N/50 mm
Bacteria resistance	ISO 846 part C	No bacterial growth	No bacterial growth
Cleanability/Riboflavin Test	ISO 4628-1 – VDI 2083 P17	0 – Excellent	0 – Excellent
Contamination control	EN 14644-1	–	Cleanroom suitable
Ease of decontamination	ISO 8690	–	Good
Sustainability performances	Norm	Tarkett Value	Tarkett Value
Recyclability through ReStart®		Recyclable	Recyclable
Carbon Footprint (Cradle-to-Gate, EPD Modules A1- A3)		4.40 kg CO ₂ eq /m²	4.40 kg CO ₂ eq /m²
Total Carbon Footprint (EPD Modules A-D, incl. recycling scenario)		5.94 kg CO ₂ eq /m²	5.94 kg CO ₂ eq /m²
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m³)	Platinum (≤ 10 µg/m³)
Formaldehyde emission class		E1	E1
Dimensions and designs	Norm	Tarkett Value	Tarkett Value
Roll		2 × 20 m	2 × 20 m
Number of designs available		24	2

The above information is subject to modification for the benefit of further improvement. (01/24).

Non contractual pictures. The illustrations do not reflect the actual scale of the products.

According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



Tapiflex Stairs – Technical Data

TECHNICAL DATA	STANDARD	TAPIFLEX STAIRS	TAPIFLEX STAIRS SELF-ADHESIVE
Classification	Norm	Tarkett Value	Tarkett Value
Product type	EN ISO 11638	Polyvinyl chloride floor coverings with foam layer	Polyvinyl chloride floor coverings with foam layer
Commercial classification	EN ISO 10874	34 Very Heavy	34 Very Heavy
Industrial classification	EN ISO 10874	42 General	43 General
Wear layer binder content	EN ISO 11638	Type I	Type I
Technical Characteristics	Norm	Tarkett Value	Tarkett Value
Wear layer thickness	EN ISO 24340	0.85 mm	0.85 mm
Total thickness	EN ISO 24346	3.30 mm	3.30 mm
Total weight	EN ISO 23997	3250 g/m²	3250 g/m²
Surface treatment		Top Clean XP®	Top Clean XP®
Installation method		Glue-down	Self-Adhesive
Performance for CE Marking	Norm	Tarkett Value	Tarkett Value
Declaration of Performance	EN 14041	0120-025-DoP-2013-04	0120-0069-DoP-2014-12
Reaction to fire	EN ISO 13501-1	B _f -s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) B _f -s1 glued over any derivate wood substrate	C _f -s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) C _f -s1 glued over any derivate wood substrate
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)	Antistatic (≤ 2 kV)
Thermal resistance	EN ISO 10456	0.04 m² •K/W	0.04 m² •K/W
Slip resistance	EN 13893	Class DS (μ ≥ 0.30)	Class DS (μ ≥ 0.30)
Technical Performances	Norm	Tarkett Value	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.20 mm Average measured value*: 0.17 mm	Required value: ≤ 0.20 mm Average measured value*: 0.17 mm
Dimensional stability	EN ISO 23999	Required value: ≤ 0.40 mm Average measured value*: ≤ 0.10%	Required value: ≤ 0.40 mm Average measured value*: ≤ 0.10%
Impact sound reduction – ΔL _w	EN ISO 717 / 2	18 dB	18 dB
Reduction of in-room impact noise	NF S31-074	Class A (≤ 65 dB)	Class A (≤ 65 dB)
Slip resistance ⁽¹⁾	DIN EN 16165	R10	R10
Furniture leg	EN ISO 16581	No damage	No damage
Castor chair	EN ISO 4918	No damage	No damage
Curl resultant to heat	EN ISO 23999	≤ 8 mm	≤ 8 mm
Colour fastness to light	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Not affected	Not affected
Underfloor heating		Suitable (subfloor temperature maximum 27°C)	Suitable (subfloor temperature maximum 27°C)
Sustainability performances	Norm	Tarkett Value	Tarkett Value
Recyclability through ReStart®		Recyclable	Recyclable
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m³)	≤ 100 µg/m³
Formaldehyde emission class	EN 717-1	E1	E1
Dimensions and designs		Tarkett Value	Tarkett Value
Roll		1 × 23 m	1 × 23 m
Number of designs available		15	5

The above information is subject to modification for the benefit of further improvement. (01/24).

* For information – not binding. – ⁽¹⁾Please note that slip resistance may be impacted by usage and cleaning operations.

According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com

Non contractual pictures. The illustrations do not reflect the actual scale of the products.

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ **Belgium:** Tarkett Belux Sprl – Tel. +32 52 26 24 11 ■ **Denmark:** Tarkett A/S – Tel. +45 43 90 60 11 ■ **Finland:** Tarkett Oy – Tel. +358 9 4257 9000 ■ **France:** Tarkett SAS – Tel. +33 1 41 20 42 49 ■ **Germany:** Tarkett Holding GmbH – Tel. +49 621 68172 300 ■ **Greece:** Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ **Italy:** Tarkett S.p.A. – Tel. +39 0744 7551 ■ **Luxembourg:** Tarkett GDL SA – Tel. +352 949 211 8804 ■ **Netherlands:** Tarkett BV – Tel. +31 416 685 491 ■ **Norway:** Tarkett AS – Tel. +47 32 20 92 00 ■ **Portugal:** Tarkett SA – Tel. +351 21 427 64 20 ■ **Spain:** Tarkett Floors S.L. – Tel. +34 91 358 00 35 ■ **Sweden:** Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ **Switzerland:** Tarkett Holding GmbH – Tel. +41 043 233 79 24 ■ **Turkey:** Tarkett Aspen – Tel. +90 212 213 65 80 ■ **United Kingdom:** Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** Baltic Countries: Tarkett Baltics: Tel. +370 37 262 220 ■ **Czech Republic:** Tarkett org. složka – Tel. +420 271 001 600 ■ **Hungary:** Tarkett Polska SP Z.O.O. magyarországi fióktelepe – Tel. +36 1 437 8150 ■ **Poland:** Tarkett Polska Sp. z o. o. – Tel. +48 22 16 09 231 ■ **Russian Federation:** ZAO Tarkett RUS – Tel. +7 495 775 3737 ■ **Slovakia:** Tarkett Polska, organizacná zložka – Tel. +421 2 48291 317 ■ **South East Europe:** Tarkett SEE – Tel. +381 21 7557 649 (44) 569 12 21 ■ **Ukraine:** Tarkett UA – Tel. +38 (0) 44 35 45 621 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ **China:** Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ **North East Asia:** Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ **India:** Tarkett Flooring India Pvt. Ltd. – Bangalore – Tel. +91 80 4130 3793 – New Delhi – Tel. +91 11 4352 4073 – Mumbai – Tel. +91 22 2648 8750 ■ **South East Asia:** Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ **Israel:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ **Canada:** Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett – Tel. 55 12 3954 7108 ■ **Argentina – Chile – Uruguay:** Tarkett Latam Mercosur – Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ **Bolivia – Colombia – Ecuador – Panama – Paraguay – Peru – Trinidad and Tobago – Venezuela:** Tarkett – Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ **Mexico / Central America:** Tarkett Latam Mexico – Tel. +55 11 98410 9310

CONTACT INFORMATIONS, DOCUMENTATIONS & ECHANTILLONS : 01.41.20.42.49 – infodoc@tarkett.com

Les décors et photos utilisées dans cette carte nuance sont illustratifs uniquement. Ces images ne sont pas contractuelles et n'ont pas valeur de recommandation produit ou d'installation.

Design : Studio 5•5 / Photos : Studio 5•5

professionnels.tarkett.fr



CONTACT INFORMATIONS, DOCUMENTATIONS & ECHANTILLONS : 01.41.20.42.49 – infodoc@tarkett.com