
Cementi Click

MINERAL TILES

Experience the real authenticity



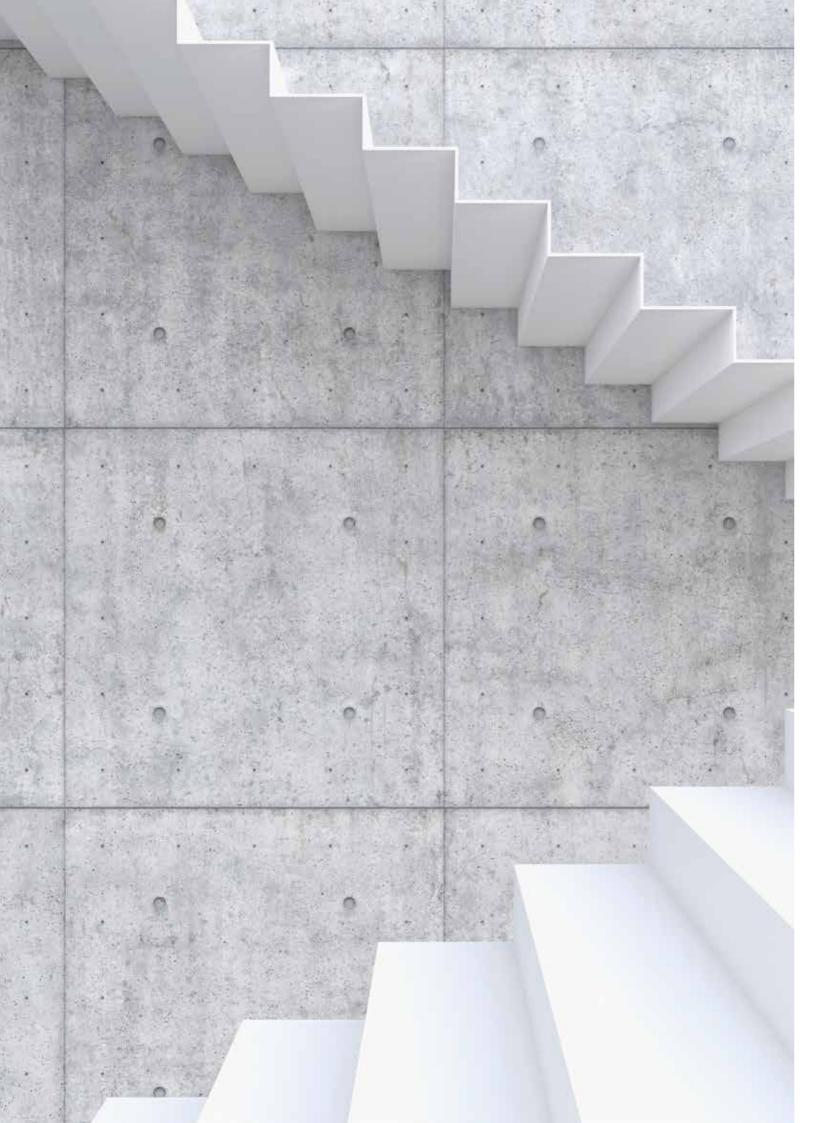

Cement embodies the timeless elegance of the concrete art in architecture.

This raw modern material is now made available into a **new category of floor tiles,** Cementi Click. The collection conveys the authenticity of a mineral material and the simplicity of its decors and its **click installation system.** It is created for **high traffic use,** and is therefore highly appropriate for use in hotels, restaurants, stores and many other spaces.

Four patterns in warm and cool grey catch the essence of bare concrete and depict the unspoiled beauty and **authenticity of natural materials.**


Their aesthetic inspires the graphic story of 10 decors, exploring the handmade authenticity of pochoir prints. The collection is complemented with a series of stone and wood material effects. All 23 high-definition designs are easily **combinable.**



Cementi Click initiates a new generation of material for architectural spaces, thanks to the click system that is used for the first time with mineral tiles.

This flooring allows accelerated project installation, with its **swift assembling** and little need for subfloor preparation. It can cover any surface including uneven ones and ceramic.

The extremely **rigid and stable** core structure does not require expansion gaps for large surface installations, even in high temperature variation spaces such as winter gardens and store fronts. With its backing layer, Cementi Click also helps **diminish sound transmission** to neighbouring areas or floors.

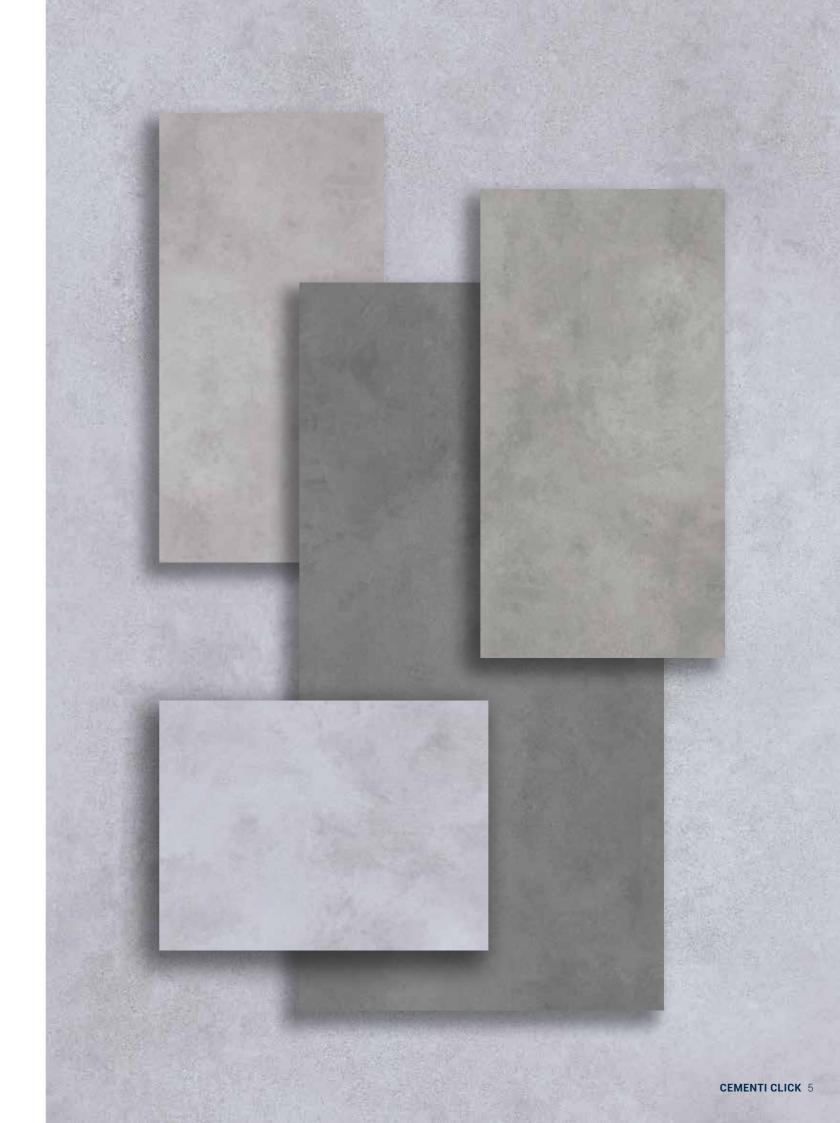



CONCRETE

Forming the foundation for all the other designs, Concrete is available in four different shades that feature cool and warm tones.



COOL LIGHT 24778004



COOL DARK 24778005



WARM LIGHT 24778006



WARM MEDIUM 24778007



WARM LIGHT 24778006



WARM MEDIUM 24778007





TANGENTS

Tangents draws inspiration from two basic geometric shapes, the semi-circle and the square, juxtaposing them to create a dynamic, constantly shifting pattern that appears to move in opposing directions.




CONTRAST 24778013






COLOUR 24778014



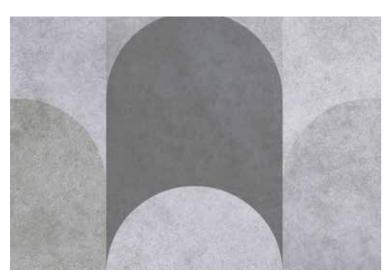

CONTRAST 24778013



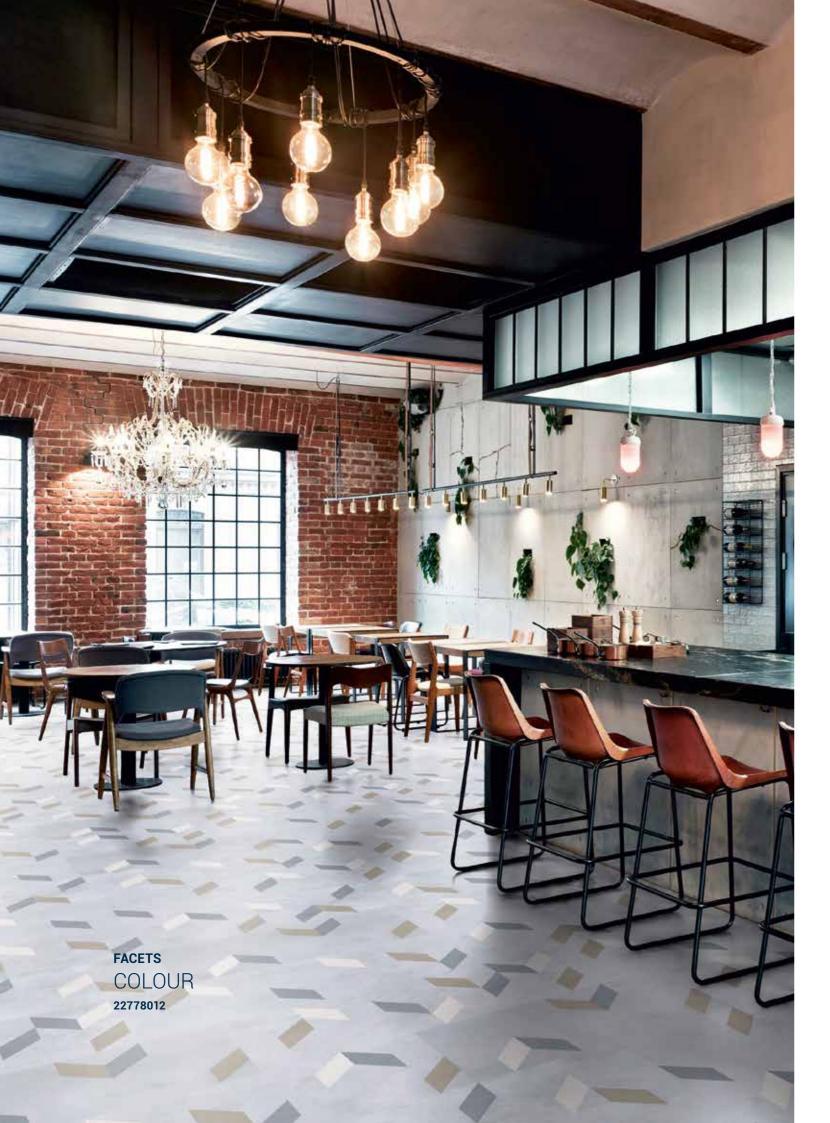

FACETS

Facets are a pair of engaging, intriguing designs that confound expectation. 'Tonal' sees patterns begin, only to break off again in a seemingly random fashion. 'Colour' adds a further, chromatic dimension to this asymmetrical artistry.











COLOUR 24778012

DELTAS

Deltas focuses on a chevron design in the soft hues of concrete. The pattern is repeated at each end of the tile, a modular approach that simplifies installation and creates an apparently infinite sequence.




TONAL 24778016





CONTRAST 24778017



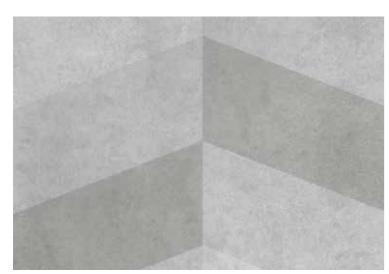

TONAL 24778016

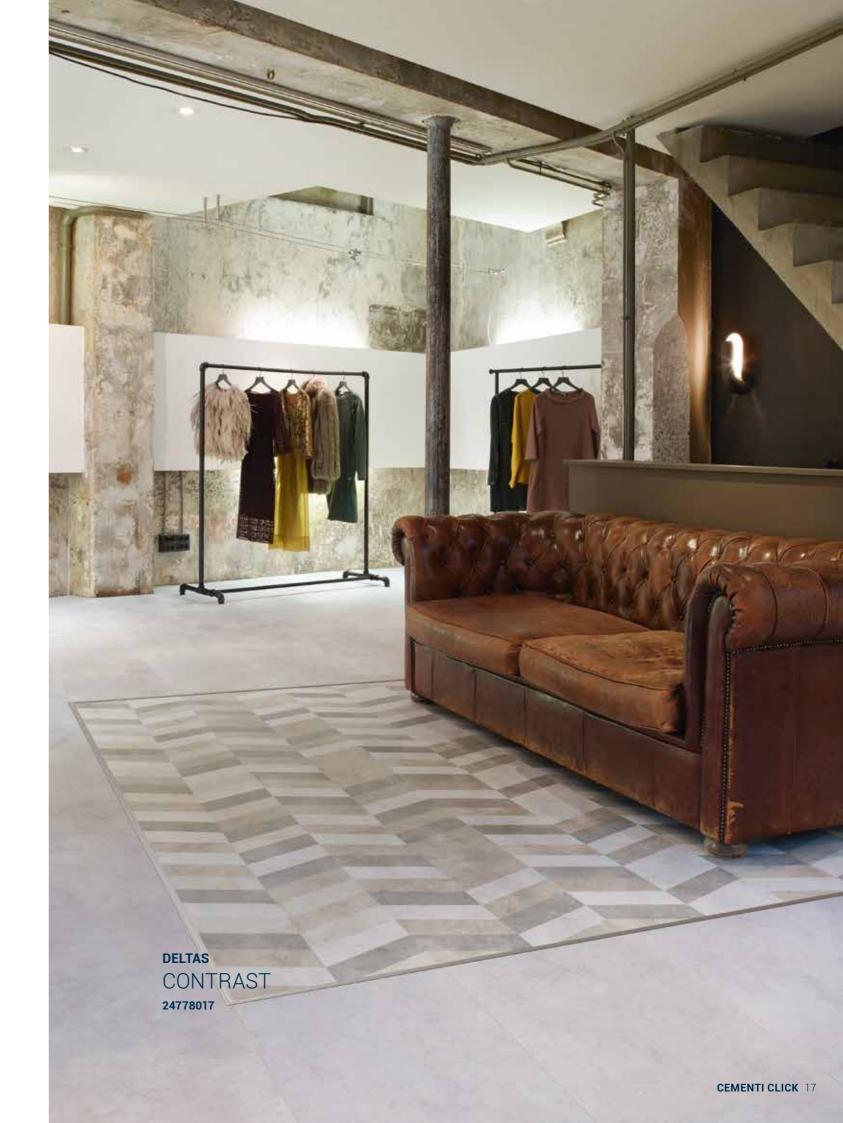

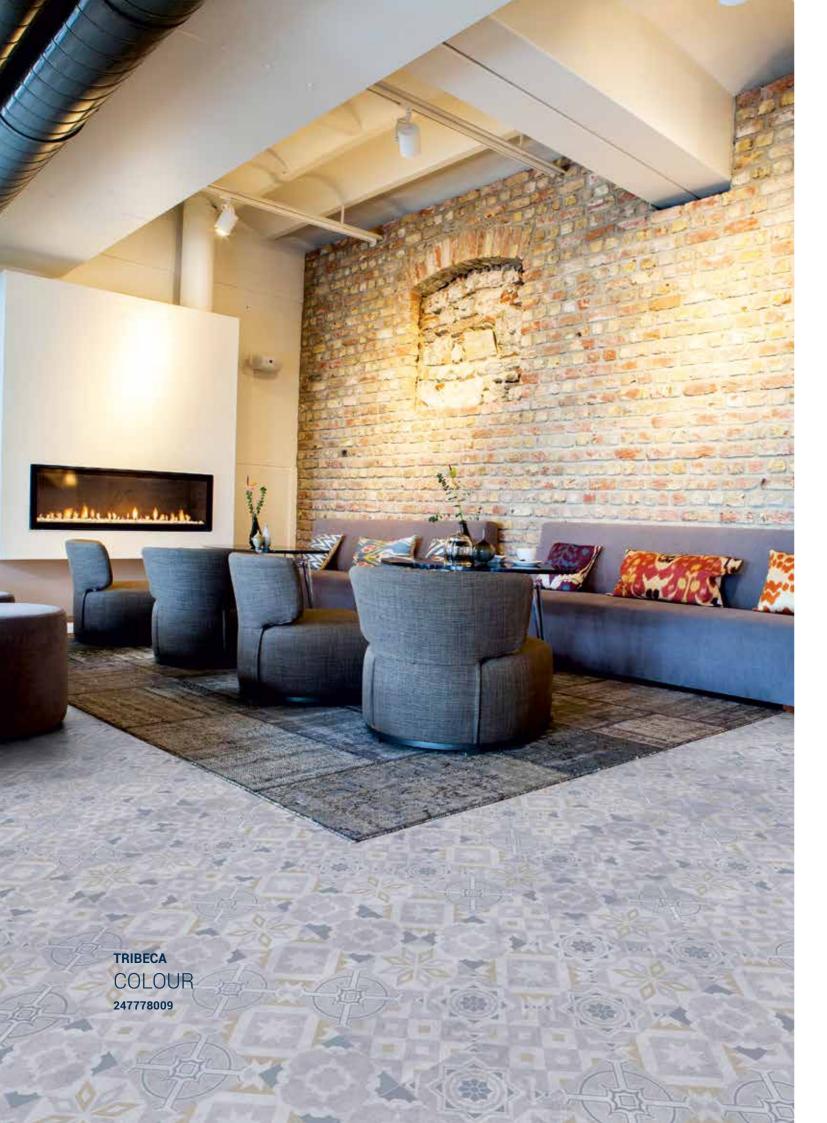

TRIBECA

Tribeca harnesses the aesthetic qualities of the tile's cement core as the perfect backdrop for an intricate design involving six individual decorative motifs, each set within its own square.







GREY 24778010










GREY 24778010

ECHOS

Echos has a floating, ethereal quality based on a progression of hand-painted dots that seem to fade and rematerialize with varying intensity and definition.

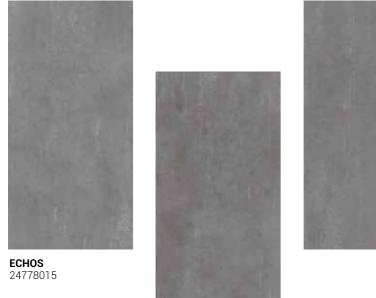



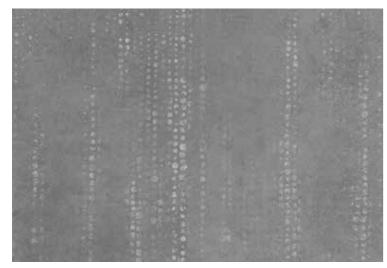


ECHOS 24778015






SHADOW LINES


In Shadow Lines, a mix of horizontal and vertical bands coalesce into a pattern resembling a maze. The design's regular proportions acquire a random element with the sporadic appearance of a lighter shade.

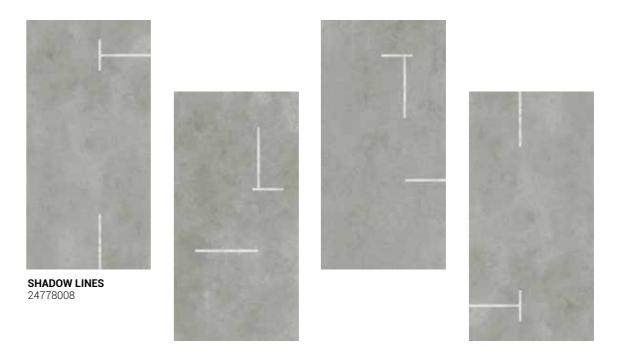

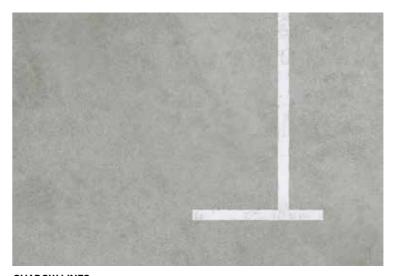

SHADOW LINES 24778008



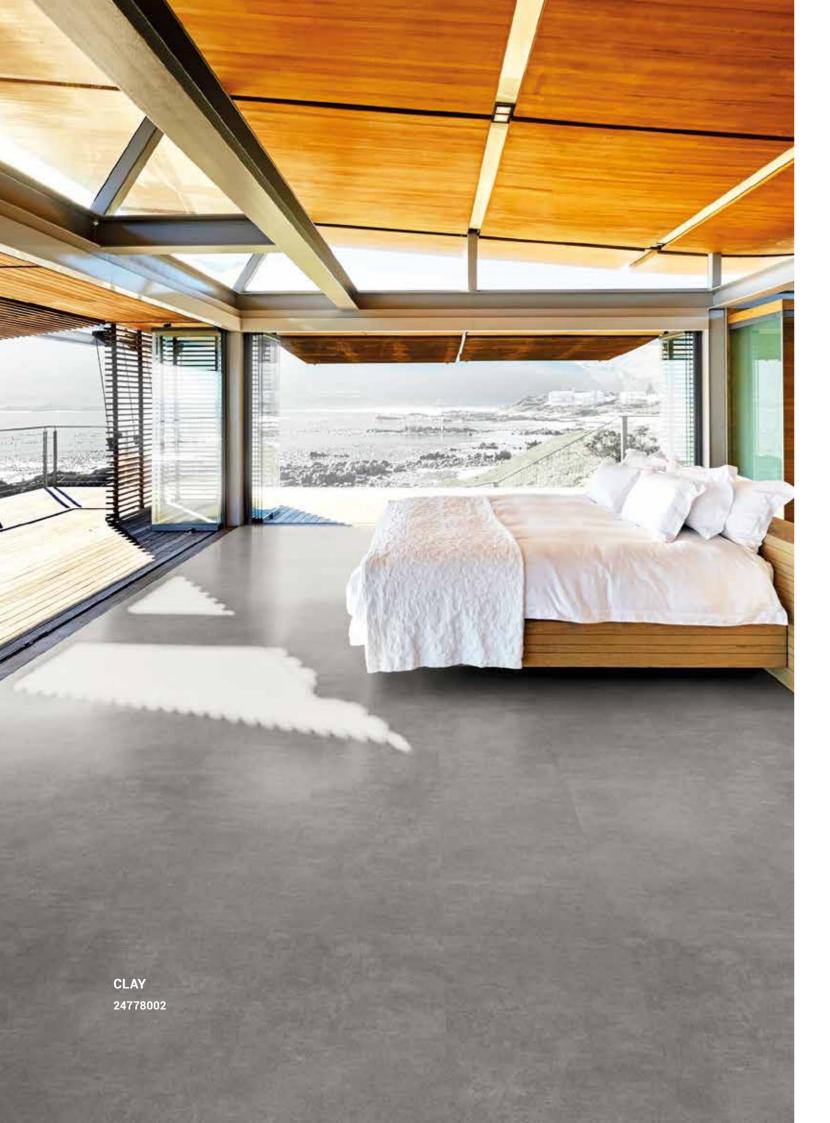

BELGIAN STONE

Belgian Stone breathes new life into a classic stone design that features a muted terrazzo effect. It is portrayed in two variations, Clay and Ashen.





ASHEN 24778001





CLAY 24778002

MARBLE

Grey Marble captures the authentic look of crystalline rock with its complex pattern of variegated streaks. The grey colour and matt finish combine to great effect.

Concrete Marble adopts a more understated approach to stone by fusing the coarse textures of raw concrete with a basic marble structure.





GREY MARBLE 24778000





CONCRETE MARBLE 24778003





WOOD

Cementi Click also features five highly graphic Oak decors that depict a spectacle of nature at its best and add the perfect amount of reassurance to the eyes.



GARDEN OAK ARABICA 35989018



PARK OAK MERCURY 35989019



PARK OAK BRASS 35989020



FOREST OAK CASSIA 35989021



FOREST OAK CLOVE 35989022



PARK OAK BRASS 35989020






The Cementi Click collection ranges from planks to tiles. These formats enable a quick and easy installation on large surfaces, with little need for subfloor preparation before laying, making the space useable again within a short period.


1235 x 200 mm

920 x 460 mm


The slight variation in colour is normal and can be attributed to the use of the fiber cement component.

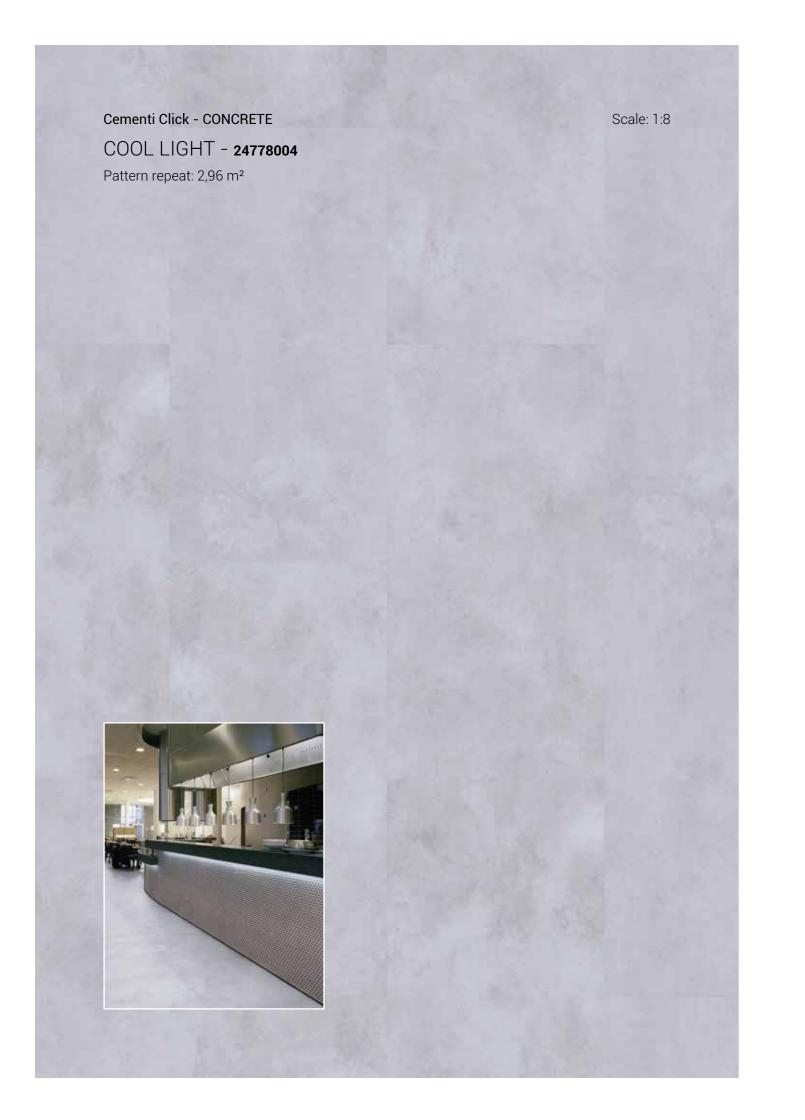




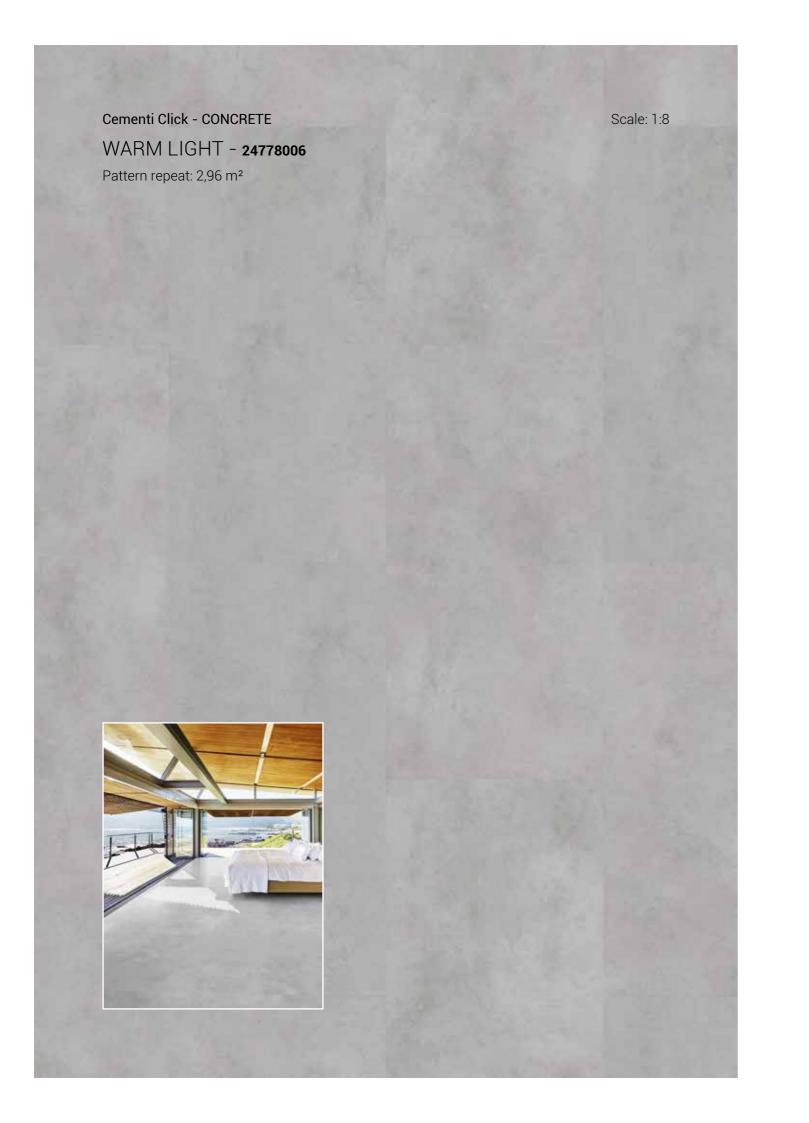




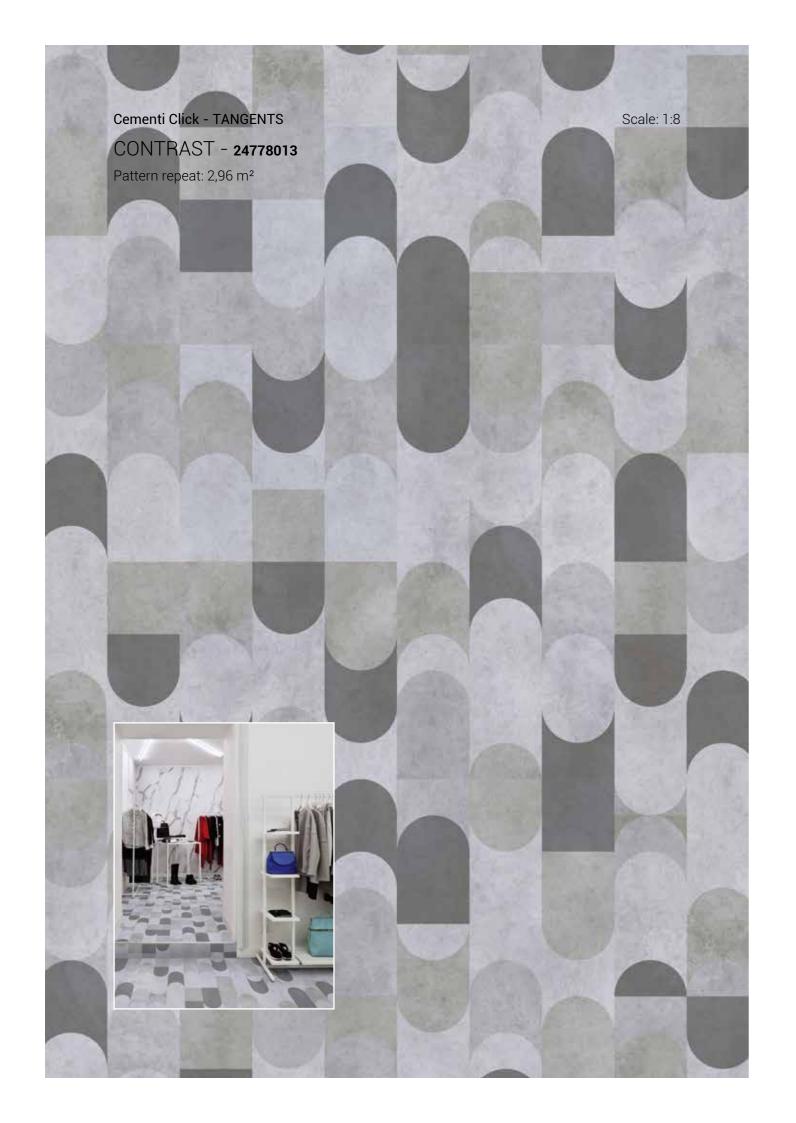




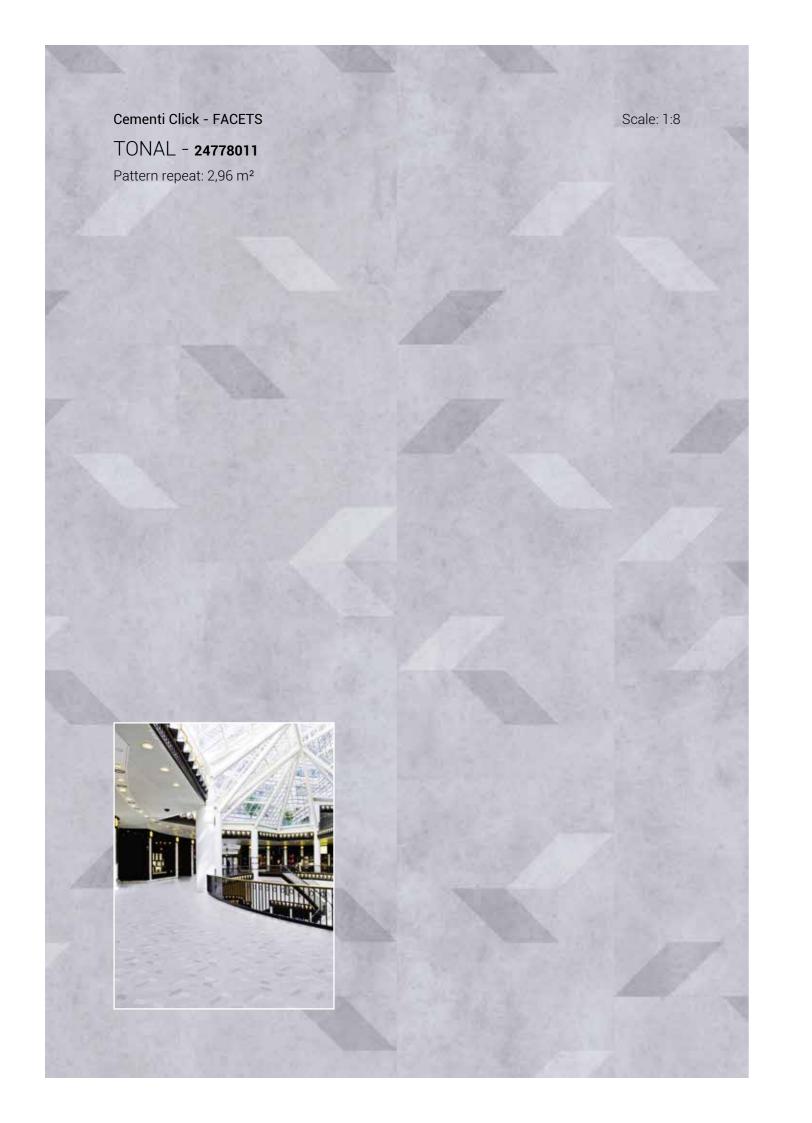

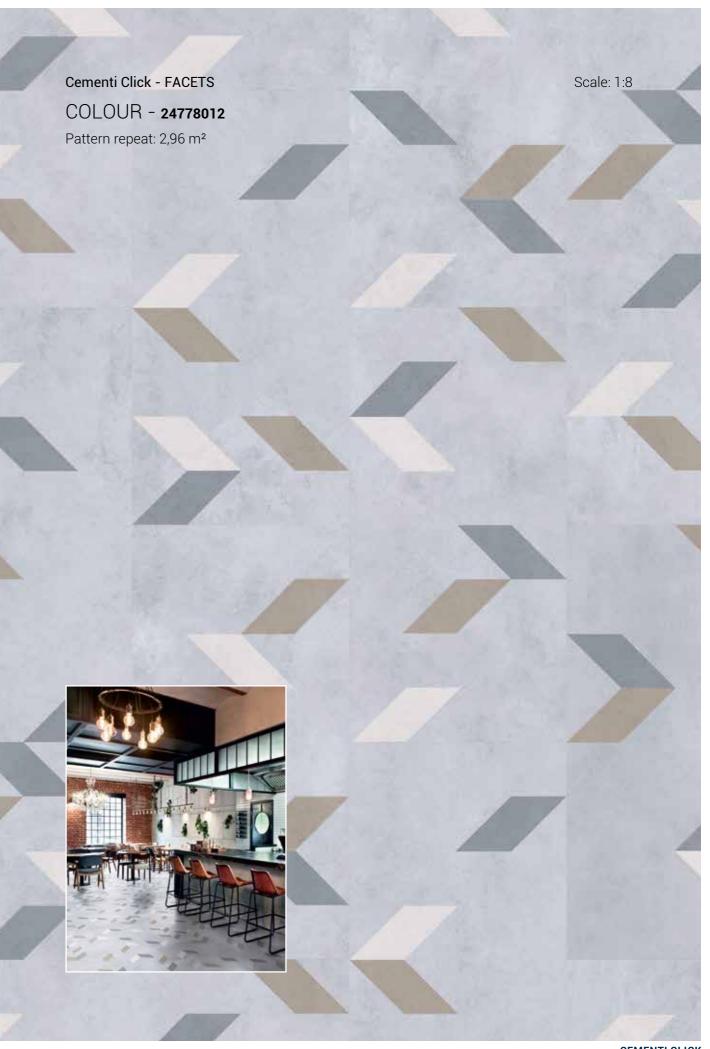







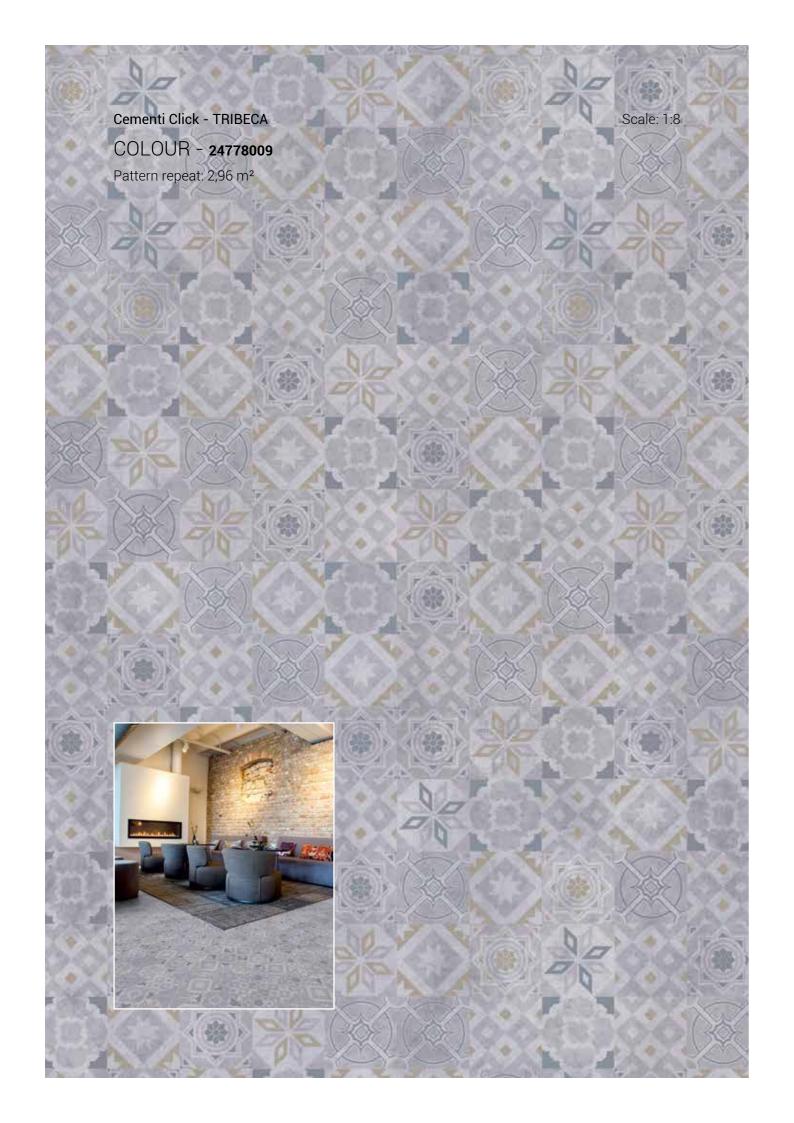








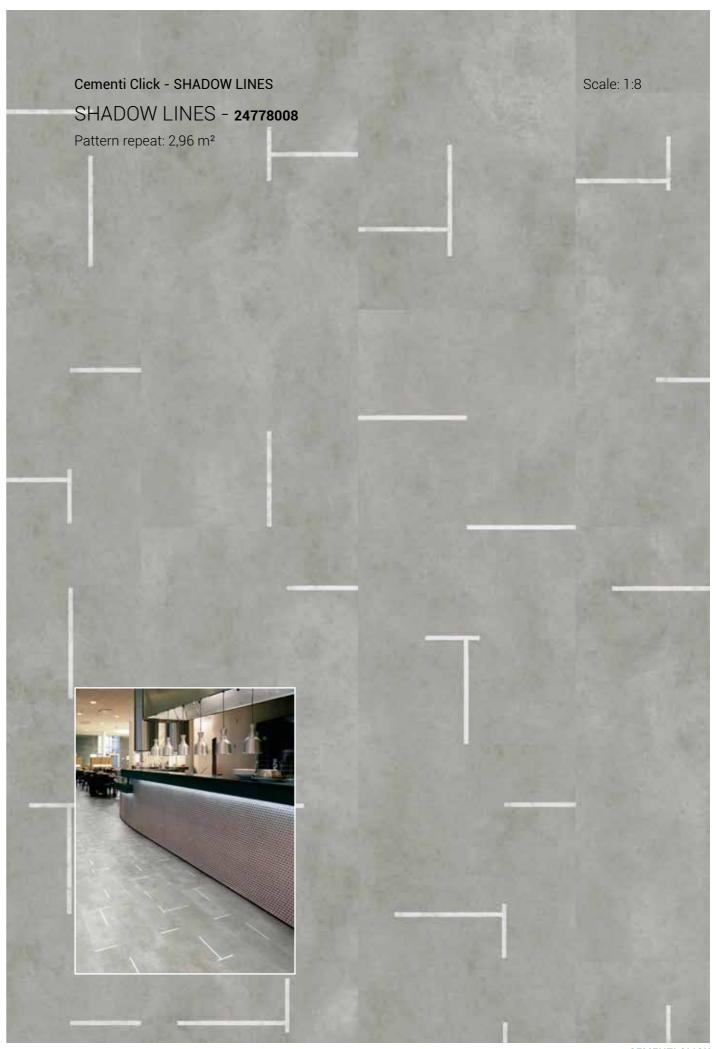

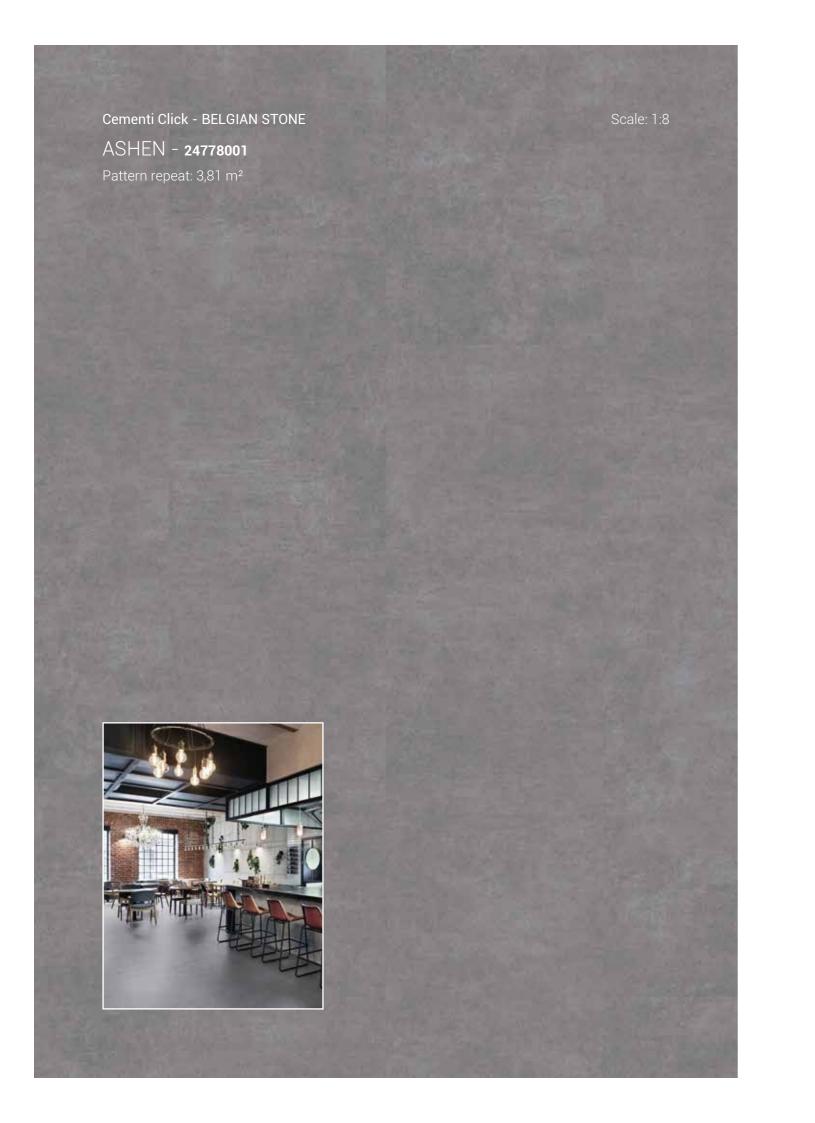

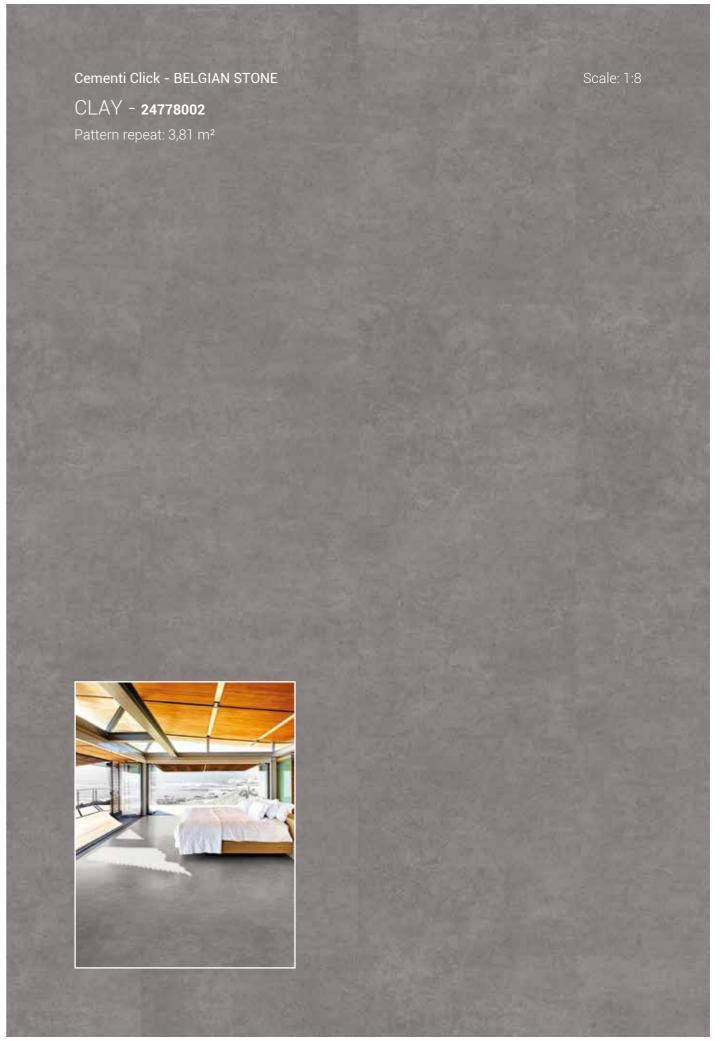

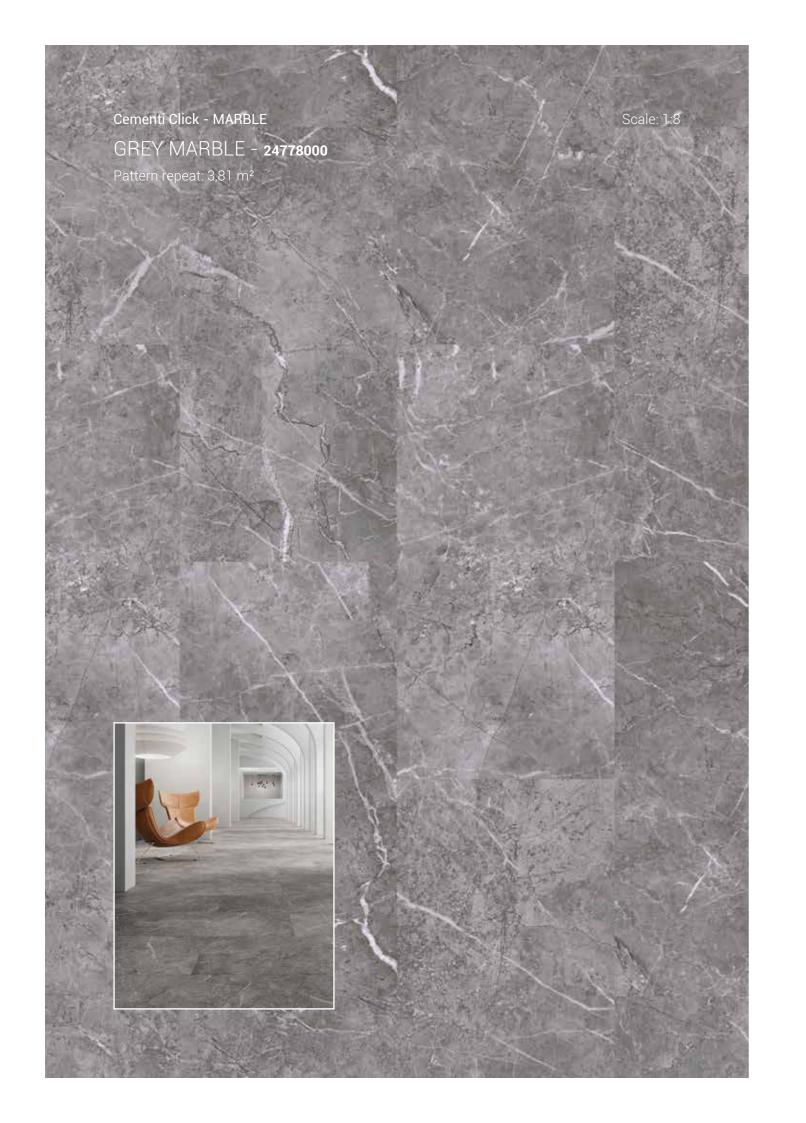


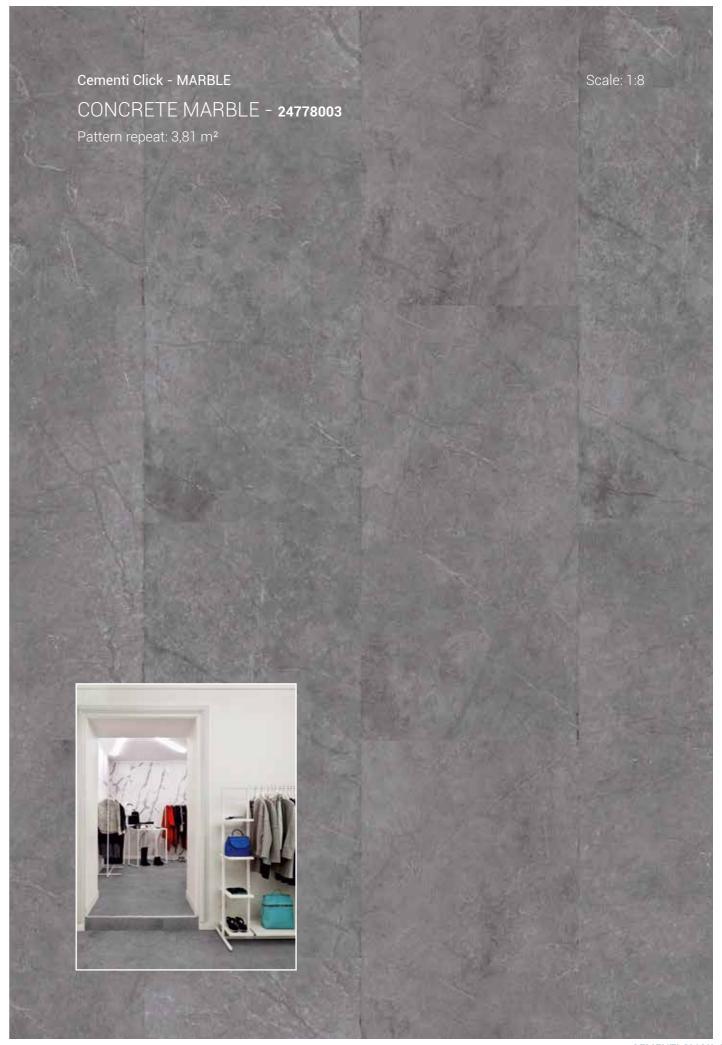







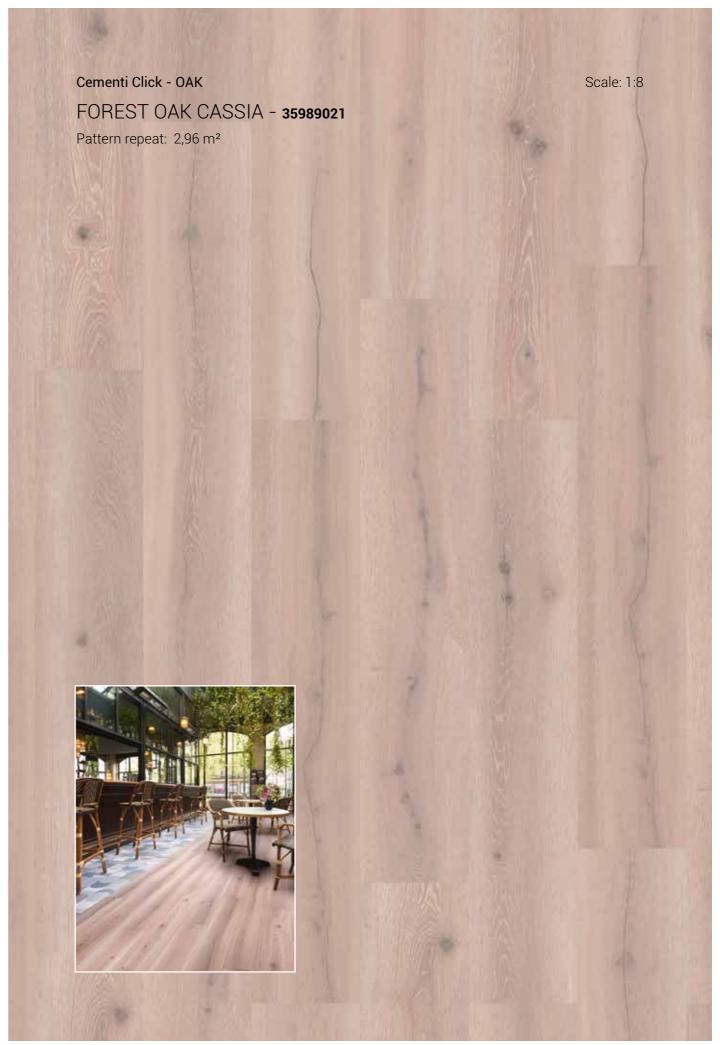



CARING FOR PEOPLE AND THE PLANET

At Tarkett, we strive to support both our professional clients and consumers in creating healthy, beautiful and sustainable living spaces.



Designing for life

A new flooring category in Tarkett's portfolio, Cementi Click has been designed for life.

Good materials

Cementi Click meets our materials quality standards. Made of 95% natural mineral elements, it is both durable and respectful of people's health and the environment. Its core board is made from clay (cement), cellulose, and fillers which are abundant natural resources, therefore preserving natural capital.

Resource stewardship

Cementi Click's production process ensures effective water and energy management. No water is used in the production processes.

Additionally, 100% of the electric power of the plant is renewable.

People friendly spaces

Cementi Click contributes to good indoor air quality. Its TVOC emissions is $\leq 10 \ \mu g/m^3$, well under current regulations and standards.

It is blue angel certified and is naturally phthalate-free. For well-being, Cementi Click minimizes the noise thanks to its good acoustic performance (19db).

Cementi Click is easy to install and maintain overtime. Thanks to its Click system, it is installed without any adhesive. Its PUR surface treatment, which is highly resistant to stains scuffs and scratches, allows for a chemical-free maintenance, using little water over its lifespan.



Closing the loop

Reuse

Through the production process, the cement can easily be recycled: all the manufacturing waste and productions scraps are collected and sent to cement producers in order to reuse them in cement production.

Post use

CementiClick is eligible to Tarkett's ReStart program, post utilisation of the product. After the product has been used, it can be collected and sent back to the manufacturing site to be re-engineered as a new product.

More excellent reasons to choose Cementi Click


- ▼ TVOC ≤10µg/m³ for good indoor air quality
- ✔ Blue angel certified product for good indoor air quality
- ✓ Good acoustic performance for people's well-being and comfort
- ✓ CE Marking and REACH compliant
- ✓ Made of 95% of abundant natural materials
- ✓ Naturally phthalate-free
- ✓ All manufacturing waste recycled and reused in cement production
- ✓ Production plant powered with 100% renewable energy
- ✓ Eligible to Post-Use ReStart program: after use, product can be sent back to the manufacturing site to be re-engineered.


INSTALLATION SYSTEM AND ACCESSORIES

FOR LONG-LASTING FLOORS

Cementi Click initiates a new generation of material for architectural spaces, thanks to the click system that is used for the first time with mineral tiles, allowing a swift assembling.

Click system for easy & quick installation





The Cementi Click collection offers a complete accessory range to make your floor water-resistant and long lasting. These solutions also ensure the perfect finish for your flooring.

Waterproofing solution for 100% water-tightness


To optimize the installation in wet areas, Tarkett has created Tarkoproof, a liquid sealant solution designed for Tarkett click modular solutions.

Tarkoproof will prevent any dust or water penetration into the bevels thus ensuring an ease of maintenance and an improved durability for the Cementi Click floors.

Profiles for a perfect finish


Aluminium transition strip for high traffic:

- Superior resistance to high-traffic.
- Ribbed surface for slip-resistance.
- Two parts system to be screwed for long lasting performance.
- Easy to clean and maintain.




The specification data is available online.

Silicone joint for waterproof installation



Aluminium reduction strip:

- Compatible with floorings having major difference in thickness, up to 8mm.
- · Large slope to make circulation easier.
- Ribbed surface for slip-resistance.
- Easy to install solution (one piece).
- · Suitable for immediate use in high-traffic areas



TECHNICAL DATA SHEET

Certification & classification	Standards	Cementi Click
Type of floor covering	EN 16511	Loose-laid panels-Semi-rigid multilayer modular floor (MMF) covering panels with wear resistant top layer
Classification	EN 16511	Commercial: 33
Fechnical characteristics		
Total thickness	ISO 24337	7,5 mm
Total weight	EN ISO 23997	12000 g/m²
Dimensions	ISO 24337	Planks: 1235 x 200 mm, 6 planks/box = 1,482 m² (44 boxes) Tiles: 920 x 460 mm, 4 tiles/box = 1,693 m² (40 boxes)
Surface treatment (PUR)		Yes
Beveled edges		Yes -Micro Bevel
Technical performances		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Reaction to fire	EN 13501-1	B _{ff} -s1 loose laid on concrete and on wood
Residual indentation	EN ISO 24343-1	≤ 0,2 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	19 dB
Light fastness	EN ISO 105-B02	≥ 6
Resistance to staining	EN 438-2	Groups 1 & 2: grade 5 Group 3: grade 4
Wear resistance	EN 13329 A method	AC5 (≥ 6000 cycles)
Impact resistance	EN 13329	IC3 (≥ 1600 mm)
Micro-scratch resistance	EN 16094	MSR-A2
Swelling	ISO 24336	≤ 18 %
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0,30
Antistatic performance	EN 1815	< 2 kV > 10 ⁹ Ohm
Thermal resistance	EN 12667	≤ 0,05 m² K/W
Underfloor heating	-	Suitable
TVOC emissions after 28 days	EN 16516	≤ 10 µg/m³*

* Platinium TIAO

The above information is subject to modification for the benefit of further improvement. (06/17).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed.

Please contact Tarkett at the address shown for these instructions. CE Marking: according to the European Regulation N° 305/2011, the Declaration of Performance n° 0132-0069-DoP-2017-11 is available on our website www.tarkett.com





substances volatiles dans l'air intérieur. présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très







CUSTOMS TARIFF: 4820 5000 00

CEMENTI COLLECTION

CONCRETE



COOL LIGHT 24778004



COOL DARK 24778005



WARM LIGHT 24778006



WARM MEDIUM 24778007

TANGENTS.....



CONTRAST



COLOUR 24778014



TONAL 24778011



COLOUR 24778012

DELTAS



TONAL 24778016



CONTRAST 24778017



COLOUR 24778009



GREY 24778010

ECHOS



ECHOS 24778015



SHADOW LINES.

SHADOW LINES 24778008



ASHEN 24778001



CLAY 24778002

MARBLE



GREY MARBLE 24778000



CONCRETE MARBLE 24778003

W00D....



GARDEN OAK ARABICA 35989018



PARK OAK MERCURY

35989019




35989020



FOREST OAK CASSIA 35989021



FOREST OAK CLOVE

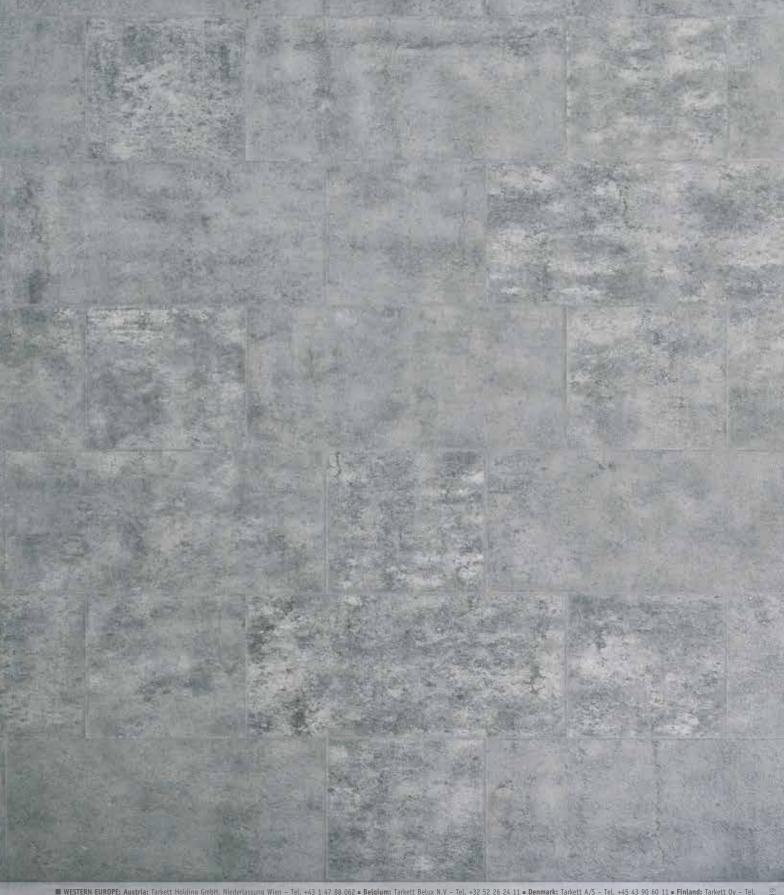

WESTERN EUROPE: Austria: Tarkett Holding GmbH, Niederlassung Wien − Tel. +43 1 47 88 062 ■ Belgium: Tarkett Belux N.V − Tel. +32 52 26 24 11 ■ Denmark: Tarkett A/S − Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy − Tel. +38 9 4257 9000 ■ France: Tarkett S.D. F. Tel. +32 52 62 41 1 ■ Netherlands: Tarkett Holding GmbH, Bereich Objekt − Tel. +49 62 33 810 ■ Greece: Tarkett Monoprosopi Ltd − Tel. +30 210 6745 340 ■ Italy: Tarkett S.D. F. Tel. +35 12 427 64 20 ■ Spain: Tarkett Belux N.V − Tel. +32 52 62 41 1 ■ Netherlands: Tarkett Holding GmbH, V − Tel. +31 416 685 491 ■ Norway: Tarkett AS − Tel. +47 32 20 92 0.0 ■ Portugal: Tarkett S.D. Fel. +35 12 427 64 20 ■ Spain: Tarkett S.D. Fel. +34 91 358 00 35 ■ Sweden: Tarkett S.D. Fel. +36 12 51 90 0 ≥ Switzerland: Tarkett Holding GmbH, Bereich Objekt Schweich Objekt

The designs and photos used in this brochure are for illustration purposes only.
They are not contractual images and do not stand for product recommendation.
Design: AgenceGecko / Photos: Studio des plantes – Getty images / Print: Lamazière

www.professionals.tarkett.com





