

TARKO SOLUTIONS

Underlayers
& overlayers



WET
SUBSTRATE



UNEVEN
FLOOR



ACOUSTIC
COMFORT



PRESERVED
FLOORING



DAMP
PROOF



FLOOR
PROTECTION



06/2016



THE ULTIMATE
FLOORING EXPERIENCE

			Type of flooring ▼	Traffic ▼		WET SUBSTRATE ⁱ	UNEVEN SUBSTRATE ⁱ		ACOUSTIC COMFORT ⁱ	PRESERVED FLOORING ⁱ		DAMP PROOF ⁱ	FLOOR PROTECTION ⁱ
							MINOR IRREGULARITIES	MAJOR IRREGULARITIES		TEMPORARY INSTALLATION	ASBESTOS TILES		
RESILIENT FLOORINGS	Vinyl - HE rolls	Light to moderate	➤	✔ TARKOLAY ⁽¹⁾	-	✔ Jumpax® Original ✔ Marathon® Dual ⁽³⁾	✔	✔ TARKOFLAT LL	✔ TARKOFLAT LL	-			
		Heavy	➤	✔ TARKOLAY ⁽¹⁾	-	✔ Jumpax® Original ✔ Marathon® Dual ⁽³⁾	✔	-	-	-			
	Vinyl - H0 rolls	Light to moderate	➤	✔ TARKOLAY ⁽¹⁾	-	✔ Jumpax® Original	✔	✔ TARKOFLAT LL	-	-			
		Heavy	➤	✔ TARKOLAY ⁽¹⁾	-	✔ Jumpax® Original	✔	-	-	-			
	Vinyl - LVT glued	Light to moderate	➤	-	✔ TARKOFLAT LL ✔ TARKOFLAT SA	✔ Jumpax® Original	✔ TARKOMFORT Self-adhesive ⁽⁴⁾	✔ TARKOFLAT LL	✔ TARKOFLAT LL	-			
		Heavy	➤	-	-	✔ Jumpax® Original	✔ TARKOMFORT Self-adhesive ⁽⁴⁾	✔ TARKOFLAT LL	✔ TARKOFLAT LL	-			
	Vinyl LVT click	Light to moderate	➤	-	✔ TARKOFLAT LL	✔ Jumpax® Original ✔ Marathon® Dual	✔ TARKOMFORT Premium 19dB ✔ TARKOMFORT Pro 13dB	-	-	-		✔ TARKOPROTECT 180 ✔ TARKOPROTECT 240	
		Heavy	➤	-	✔ TARKOFLAT LL	✔ Jumpax® Original ✔ Marathon® Dual	✔ TARKOMFORT Premium 19dB ✔ TARKOMFORT Pro 13dB	-	-	-			
	Vinyl LVT Loose-lay	Light to moderate	➤	-	-	✔ Jumpax® Original ✔ Marathon® Dual	✔ TARKOMFORT Self-adhesive ⁽⁴⁾	-	-	-			
		Heavy	➤	-	-	✔ Jumpax® Original ✔ Marathon® Dual	✔ TARKOMFORT Self-adhesive ⁽⁴⁾	-	-	-			
	Vinyl wetroom		➤	-	-	-	✔ TARKOMOUSSE	-	-	-			
	Linoleum		➤	-	-	-	✔ ELAFONO	-	-	-			
HARD FLOORINGS	Laminate		➤	✔ SoundBlock Foam 19dB ✔ Vapour barrier ⁽²⁾	✔ SoundBlock Foam 19dB ✔ Standard Foam 18dB	-	✔ SoundBlock Foam 19dB ✔ Standard Foam 18dB	-	-	-	✔ TARKOPROTECT 180 ✔ TARKOPROTECT 240		
	Wood		➤	✔ Vapour barrier ⁽²⁾	✔ TARKOFOAM II ✔ TARKOFLEX II ✔ Felt paper	-	✔ TARKOFOAM II 17dB ✔ TARKOFLEX II 19dB	-	-	-	✔ Protective Cardboard		
OTHER	Ceramics		➤	-	-	-	-	-	-	✔ TARKODRY Wall / Floor	-		

(1) Up to 7% HR CCM. (2) Up to 95% RH CCM. (3) Loose-laid only. (4) Under validation.

MANAGE DAMP SUBSTRATES

For Heterogeneous & Homogeneous vinyl flooring

TARKOLAY



SUBFLOOR TYPE & APPLICATION

- Residential and commercial applications
- Wood, concrete

COMPATIBLE FLOORING

- ✓ Heterogeneous vinyl flooring (rolls)
- ✓ Homogeneous vinyl flooring (rolls)

DESCRIPTION

Material: PVC coated glass fibre with 0.30mm thick studs

Total weight: 1,160g per m²

Total thickness: 1.3mm

ARTICLE NUMBER

Article code: 3960004 - Blue

Packaging: single roll - 45m x 2m (90m²)


Minimum order: 1 roll - no cutting service available

MORE INFORMATION

- [Installation instructions](#) ⓘ
- [Tarkett website](#)




Coping with up to 7% humidity rate CCM



- Features studs underneath to aid **natural drying** and ventilation
- **Prevents costly repairs** if humidity rises

Quick and easy to install



- Offers a quicker **solution** than drying the substrate or a complete natural dry-out

Easy to remove and refurbish



- Avoids damage to substrate thanks to **loose-lay** installation
- **Simplifies removal** at end of life
- Allows **easy access to substrate** in case of problem

COORDINATED ACCESSORIES



Ventilated skirting (VS100)

- Customised skirting to create genuine natural ventilation

Article code: 1252 030




GLUE RECOMMENDATION



Acrylic adhesive for gluing PVC over PVC.



We recommend to downsize the spatula type.



| TARKOLAY | VAPOUR BARRIER | 3 IN 1 SOUNDBLOCK FOAM 19dB |

MITIGATE MOISTURE



SUBFLOOR TYPE & APPLICATION

- Residential applications
- Concrete

COMPATIBLE FLOORING

- ✓ Laminate flooring (planks)

DESCRIPTION

Material: polyethylene foam with a 200µ moisture-barrier film

Total weight: 0.05kg per m²

Total thickness: 0.2mm

ARTICLE NUMBER

Article code: 8021 001

Packaging: single roll - 13m x 2m (26m²)


Minimum order: 1 unit (= 4 rolls)

MORE INFORMATION

. [Tarkett website](#)



Protection against humidity



- Offers a **quicker, more cost-effective solution** than drying the substrate or a complete natural dry-out
- **Protects floors permanently against moisture** in the subfloor (sd>100m) thanks to its 200µ moisture-barrier film
- Works with **underfloor heating**


Long lasting



- Provides **enhanced durability** via polyethylene-foam composition
- Stands up better to tears

For Laminate flooring VAPOUR BARRIER

Easy to install and remove




- Makes **installation easy**, no glue needed
- Prevents damage to substrate thanks to **loose-lay installation**
- Simplifies removal at end of life
- Allows **easy access to substrate** if required

COORDINATED ACCESSORIES FOR LAMINATE FLOORINGS





Installation tape:

- designed for use with underlayers beneath laminate
 - easy to use
- Article code: 8026 000



Large skirtings:

- perfect match with flooring design
 - shock-resistant
- Article code: 8025---



| TARKOLAY | VAPOUR BARRIER | 3 IN 1 SOUNDBLOCK FOAM 19dB |

ENJOY ENHANCED PROTECTION FROM DAMP AND NOISE

For floating Laminate flooring 3 IN 1 SOUNDBLOCK FOAM 19dB



SUBFLOOR TYPE & APPLICATION

- Residential applications
- Concrete

COMPATIBLE FLOORING

- ✓ Floating laminate flooring (planks)

DESCRIPTION

Material: recyclable polyethylene foam, freon-free, with closed-cell structure

Total weight: 0.2kg per m²

Total thickness: 3.0mm

ARTICLE NUMBER

Article code: 8267 000

Packaging: single roll - 1.2m x 16.7m (20m²)

Minimum order: 1 unit (= 1 roll)

MORE INFORMATION

• [Tarkett website](#)




Withstands humidity



- Offers a **quicker, more cost-effective solution** than drying the substrate or a complete natural dry-out
- Acts as a **genuine vapour barrier** to prevent consequences from humidity
- Aids **natural drying and ventilation** of the substrate

Easy to install and remove



- Features a smooth surface, making **planks easier to fit on top**
- Enables flooring to be put in place straight away
- Requires simple **loose-lay installation**, no glue needed
- **Leaves no residue** on floor after removal

Superior performance




- Provides **high-impact sound reduction** up to 19dB
- Ensures greater comfort underfoot
- Works with **underfloor heating**

COORDINATED ACCESSORIES FOR LAMINATE FLOORINGS






Installation tape:

- designed for use with underlayers beneath laminate
 - easy to use
- Article code: 8026 000



Large skirtings:

- perfect match with flooring design
 - shock-resistant
- Article code: 8025---



| TARKOLAY | VAPOUR BARRIER | 3 IN 1 SOUNDBLOCK FOAM 19dB |



THE ULTIMATE
FLOORING EXPERIENCE



CHOOSE THE PREFABRICATED FAST-TRACK FLOOR PREPARATION SYSTEM

For LVT click, glue-down and loose-lay and Linoleum flooring

JUMPAX® ORIGINAL



SUBFLOOR TYPE & APPLICATION

- Residential and commercial applications
- All problematic subfloors: concrete, ceramic, legacy and protected floors, old contaminated substrate (paint, wax oil, etc.) old glued-down vinyl, old wooden substrate

COMPATIBLE FLOORING

- ✓ Homogeneous and heterogeneous vinyls (rolls)
- ✓ LVT click, glue-down and loose-lay (planks or tiles)
- ✓ Linoleum flooring (rolls)

DESCRIPTION

Material: MDF, polystyrene foam covered with aluminium PED foil

Density: 585kg per m³

Total thickness: 10mm

ARTICLE NUMBER

Article code: 24993010

Packaging: 600 x 1200mm boards in packs of 4 base + 4 top boards (2.88m²)


Minimum order: 1 box (2.88m²)

MORE INFORMATION

- [Installation video](#) +
- [Tarkett website](#)




Revolutionary levelling performance




- Levels existing subfloor perfectly via a ready-to-use, dual rigid-board floating system
- Works under any residential and commercial Tarkett flooring
- Replaces costly-to-apply and slow-to-dry levelling compounds
- Offers exceptional stability

Quieter and harder-wearing



- Reduces noise by up to 21dB Lw with LVT and 23dB with linoleum
- Provides greater resistance in heavy-traffic areas with its strong, rigid structure
- Works with all types of underfloor heating systems
- Feels warm to bare feet, promoting underfoot comfort

Unparalleled ease of installation and removal



- Creates a super-smooth surface instantly for faster covering with glued or click floors
- Makes installation simple with its easy-to-use board format (overnight renovation)
- Leaves no residue after removal and preserves subfloor integrity
- Can be used over asbestos tiles, allowing future traceability

COORDINATED ACCESSORIES



For LVT floorings Skirtings:


- rigid PVC for high resistance to impact
 - PUR treatment for easy maintenance
- Article code: 26640---

For HO/HE floorings Semi-flexible skirting (KS61):

- PVC semi-rigid skirting
- Article code: 14110---

For linoleum floorings Set-on skirting:

- perfect match with flooring design
 - high resistance to impact
- Article code: 1736--- (6cm) / 1737--- (8cm)

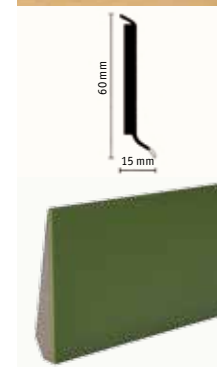

| JUMPAX® ORIGINAL | MARATHON® DUAL | TARKOFLAT LOOSE-LAY | TARKOFLAT SELF-ADHESIVE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOLEX II | TARKOFOAM II |



THE ULTIMATE FLOORING EXPERIENCE

TARKO SOLUTIONS

Underlayers & overlayers

RENOVATE EASILY AND EFFECTIVELY OVER THE EXISTING SUBFLOOR

For LVT click and loose-lay and Heterogeneous loose-laid vinyl
MARATHON® DUAL



SUBFLOOR TYPE & APPLICATION

- Residential applications
- Concrete, ceramics

COMPATIBLE FLOORING

- ✓ LVT click and loose-lay (planks or tiles)
- ✓ Heterogeneous loose-laid vinyls (rolls)

DESCRIPTION

Material: MDF and coniferous woods

Density: 240kg per m³

Total thickness: 6mm

ARTICLE NUMBER

Article code: 24993020

Packaging: 560 x 790mm plates in packs of 12 base + 12 top boards (5.31 m²)


Minimum order: 1 box (5.31m²)

MORE INFORMATION

• [Tarkett website](https://www.tarkett.com)




The ready-to-use solution for renovating over an existing subfloor




- Reduces **slight unevenness** in older subfloors **by up to 3mm**
- **Prevents telegraphic effect**, the appearance of bumps and ridges from the substrate
- Provides **good stability** and a free-floating underlay system
- Offers a **cost-effective solution**

Easy to install and remove



- Enables flooring to be put in place **straight away**
- **Can be used immediately** in normal traffic areas
- Requires **simple loose-lay installation**, no glue needed
- Leaves **no residue on floor** after removal

Superior performance



- Provides high-impact sound reduction **up to 23dB Lw with floor covering**
- Ensures greater **comfort underfoot**
- Stands up better to indentation
- Works with underfloor heating

COORDINATED ACCESSORIES




For LVT floorings Skirtings:

- rigid PVC for high resistance to impact
 - PUR treatment for easy maintenance
- Article code: 26640---

For HE floorings

Semi-flexible skirting (KS61):

- PVC semi-rigid skirting
- Article code: 14110---



| JUMPAX® ORIGINAL | MARATHON® DUAL | TARKOFLAT LOOSE-LAY | TARKOFLAT SELF-ADHESIVE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOLEX II | TARKOFOAM II |



THE ULTIMATE
FLOORING EXPERIENCE



COPE WITH SLIGHT UNEVENNESS IN SUBSTRATES

For LVT click and LVT glued flooring
TARKOFLAT LOOSE-LAY



SUBFLOOR TYPE & APPLICATION

- Residential and light commercial* applications
- For renovating old ceramic flooring, granite, marble, tiles, wood floors, cement substrates
- Suitable for temporary installation (events, exhibitions)

COMPATIBLE FLOORING

- ✓ LVT click and LVT glued flooring (planks or tiles)

DESCRIPTION

Material: calandered PVC foil, loose-lay (naked)

Total weight: 1,500g per m²

Total thickness: 1.0mm

ARTICLE NUMBER

Article code: 3568004 - Grey

Packaging: single roll - 25m x 2m (50m²)


Minimum order: 1 roll - no cutting service available

MORE INFORMATION

• [Tarkett website](#)




Ready-to-use solution



- **Reduces slight unevenness** in older subfloors by up to 1.5mm depth and 3mm width
- **Prevents telegraphic effect**, the appearance of bumps and ridges
- Provides savings of up to 20% **without need for expensive levelling**

Quick and easy to install



- Rolls out easily for **quick coverage**
- **Minimises downtime** during installation

*Check with your technical service

Easy to remove and refurbish



- Avoids damage to substrate thanks to **loose-lay** installation
- **Simplifies removal** at end of life
- Allows **easy access to substrate** in case of problem

COORDINATED ACCESSORIES



LVT skirting:

- rigid PVC for high resistance to impact
- PUR treatment for easy maintenance
- matching film for nice finish

Article code: 26640---

GLUE RECOMMENDATION



Specific acrylic adhesive for gluing PVC over PVC*.



We recommend to downsize the spatula type.



I JUMPAX® ORIGINAL | MARATHON® DUAL | **TARKOFLAT LOOSE-LAY** | TARKOFLAT SELF-ADHESIVE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOLEX II | TARKOFOAM II II



THE ULTIMATE
FLOORING EXPERIENCE



LEVEL OUT MINOR BUMPS BELOW

For LVT glued flooring TARKOFLAT SELF-ADHESIVE



SUBFLOOR TYPE & APPLICATION

- Residential applications
- For renovating old ceramic flooring, granite, marble, tiles, wood floors, cement substrates

COMPATIBLE FLOORING

- ✓ LVT glued flooring (planks or tiles)

DESCRIPTION

Material: calandered PVC foil, loose-lay (naked)

Total weight: 1,500g per m²

Total thickness: 1.0mm

ARTICLE NUMBER

Article code: 3569004 - Grey

Packaging: single roll - 25m x 1m (25m²)


Minimum order: 1 roll - no cutting service available

MORE INFORMATION

• [Tarkett website](https://www.tarkett.com)




Ready-to-use solution




- **Reduces slight unevenness** in older subfloors by up to 1.5mm depth and 3mm width
- **Prevents telegraphic effect**, the appearance of bumps and ridges
- **Prevents expensive levelling** with savings of up to 20%

Quick and easy to install



- **Simplifies handling** with 1m width
- Offers **ready-to-use solution** - simply strip off the backing and bond to flooring and substrate
- Can be used immediately

No glue needed on site



- Does away with adhesive and **saves costs**
- **Respects the environment:** no adhesive smells, cleaner jobsite
- Ensures greater comfort for installer



COORDINATED ACCESSORIES



LVT skirting:

- rigid PVC for high resistance to impact
- PUR treatment for easy maintenance
- matching film for nice finish

Article code: 26640---



I JUMPAX® ORIGINAL | MARATHON® DUAL | TARKOFLAT LOOSE-LAY | TARKOFLAT SELF-ADHESIVE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOLEX II | TARKOFOAM II |

SMOOTH OUT UNEVENNESS

For floating Laminate flooring
STANDARD FOAM 18dB



SUBFLOOR TYPE & APPLICATION

- Residential applications
- Concrete with a vapour barrier (0.2mm PE foil)

COMPATIBLE FLOORING

- ✓ Floating laminate flooring (planks)

DESCRIPTION

Material: recyclable polyethylene foam, freon-free

Total weight: 0.05kg per m²

Total thickness: 2.0mm

ARTICLE NUMBER

Article code: 8021 000

Packaging: single roll - 1 x 20m (20m²)


Minimum order: 1 unit (= 4 rolls)

MORE INFORMATION

. [Tarkett website](#)




Ready-to-use solution




- Reduces **slight unevenness** in older subfloors
- Offers **good stability** and a free-floating underlay system
- Represents a **cost-effective solution** with faster installation

Easy to install and remove



- Can be **used immediately** in moderate-traffic areas
- Requires simple **loose-lay installation**, no glue needed
- **Leaves no residue** on floor after removal

Effective and comfortable




- Provides **impact sound reduction up to 18dB**
- Ensures **greater comfort underfoot**
- Works with **underfloor heating**

COORDINATED ACCESSORIES FOR LAMINATE FLOORINGS





Installation tape:

- designed for use with underlayers beneath laminate
 - easy to use
- Article code: 8026 000



Large skirtings:

- perfect match with flooring design
 - shock-resistant
- Article code: 8025----



I JUMPAX® ORIGINAL | MARATHON® DUAL | TARKOFLAT LOOSE-LAY | TARKOFLAT SELF-ADHESIVE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOLEX II | TARKOFOAM II |

REDUCE BUMPS AND RIDGES THE HIGH-PERFORMANCE WAY

For floating Laminate flooring 3 IN 1 SOUNDBLOCK FOAM 19dB



SUBFLOOR TYPE & APPLICATION

- Residential applications
- Concrete

COMPATIBLE FLOORING

- ✓ Floating laminate flooring (planks)

DESCRIPTION

Material: recyclable polyethylene foam, freon-free, with closed-cell structure

Total weight: 0.2kg per m²

Total thickness: 3.0mm

ARTICLE NUMBER

Article code: 8267 000

Packaging: single roll - 1.2 x 16.7m (20m²)


Minimum order: 1 unit (= 1 roll)

MORE INFORMATION

- [Tarkett website](#)




Smoother surfaces



- Levels slight undulations in older subfloors
- Prevents the appearance of bumps and ridges from the substrate
- Offers **exceptional stability** and a free-floating underlay system
- Represents a **cost-effective solution** with faster installation

Trouble-free installation



- Features a smooth surface, making planks **easier to fit on top**
- Requires simple **loose-lay installation**, no glue needed
- **Leaves no residue** on floor after removal

Enhanced performance




- Provides **high-impact sound reduction up to 19dB**
- Acts as a **vapour barrier** to protect from humidity and moisture results
- Ensures **greater comfort underfoot**
- Works with **underfloor heating**

COORDINATED ACCESSORIES FOR LAMINATE FLOORINGS



Installation tape:

- designed for use with underlayers beneath laminate
 - easy to use
- Article code: 8026 000



Large skirtings:

- perfect match with flooring design
 - shock-resistant
- Article code: 8025----



| JUMPAX® ORIGINAL | MARATHON® DUAL | TARKOFLAT LOOSE-LAY | TARKOFLAT SELF-ADHESIVE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOLEX II | TARKOFOAM II |

LEVEL CONCRETE SUBFLOORS QUICKLY AND COST-EFFECTIVELY

For Wood flooring
TARKOFLEX II



SUBFLOOR TYPE & APPLICATION

- Residential and commercial applications
- Concrete
- Ceramic tiles
- Underfloor heating

COMPATIBLE FLOORING

- ✓ Wood flooring (planks)

DESCRIPTION

Material: polyethylene foam with a 100µ moisture-barrier film

Total weight: 150g per m²

Total thickness: 2.0mm

ARTICLE NUMBER

Article code: 8790 312 (15m²) / 8790 316 (70m²)

Packaging: single roll - 15 x 1m (15m²) - 70 x 1m (70m²)

Minimum order: 1 roll - no cutting service available

MORE INFORMATION


• [Tarkett website](#)

Effective and immediate




- Reduces smaller bumps and indentations by up to 1.5mm depth and 3mm width
- Creates smooth, solid and functional support for wood floors
- Eliminates the need for expensive leveling work, reducing cost by up to 20%

Superior durability




- Consists of polyethylene foam for extreme durability
- Provides stronger resistance via high-density composition (150g per m²)
- Withstands the effects of ageing for 50 years (compliant with the ISO standard 1798)

Easy to install and remove



- Makes installation easy with metre-wide roll
- Prevents damage to substrate thanks to loose-lay installation
- Simplifies removal at end of life
- Allows easy access to substrate if required

COORDINATED ACCESSORIES



Solid transition strips:



- designed to link a range of floor thicknesses
 - large assortment of wood types
 - user-friendly system
- Article code: 87911---



Clipstar skirtings (veneer):

- natural and stained
- compatible with Clip System Clipstar
- lacquered for a perfect finish

Article code:
87917--- / 87918---



I JUMPAX® ORIGINAL | MARATHON® DUAL | TARKOFLAT LOOSE-LAY | TARKOFLAT SELF-ADHESIVE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOLEX II | TARKOFOAM II |

TAKE THE FAST, SIMPLE OPTION FOR SMOOTHER WOODEN SUBFLOORS

For Wood flooring
TARKOFOAM II



SUBFLOOR TYPE & APPLICATION

- Residential and commercial applications
- Wood-based panels
- Existing wooden floor

COMPATIBLE FLOORING

- ✓ Wood flooring (planks)

DESCRIPTION

Material: polyethylene foam

Total weight: 60g per m²

Total thickness: 2.0mm

ARTICLE NUMBER

Article code: 8790 314 (15m²) / 8790 315 (70m²)

Packaging: single roll - 13.04 x 1.15m (15m²) - 61 x 1.15m (70m²)

Minimum order: 1 roll - no cutting service available

MORE INFORMATION


• [Tarkett website](#)

Effective and immediate




- Reduces slight unevenness by up to 1.5mm depth and 3mm width
- Creates smooth, solid and functional support for wood floors
- Eliminates the need for expensive leveling work, reducing cost by up to 20%

Easy to install and remove




- Makes installation easy
- Prevents damage to substrate thanks to loose-lay installation
- Simplifies removal at end of life
- Allows easy access to substrate if required

Superior performance



- Provides high-impact sound reduction, up to 19dB with 14mm wood flooring
- Ensures greater underfoot comfort

COORDINATED ACCESSORIES



Solid transition strips:


- designed to link a range of floor thicknesses
 - large assortment of wood types
 - user-friendly system
- Article code: 87911----



Clipstar skirtings (veneer):

- natural and stained
- compatible with Clip System Clipstar
- lacquered for a perfect finish


Article code:
87917--- / 87918---



| JUMPAX® ORIGINAL | MARATHON® DUAL | TARKOFLAT LOOSE-LAY | TARKOFLAT SELF-ADHESIVE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOLEX II | TARKOFOAM II |

IMPROVED ACOUSTIC PERFORMANCE EASILY

For LVT glued and loose-laid flooring TARKOMFORT SELF-ADHESIVE*

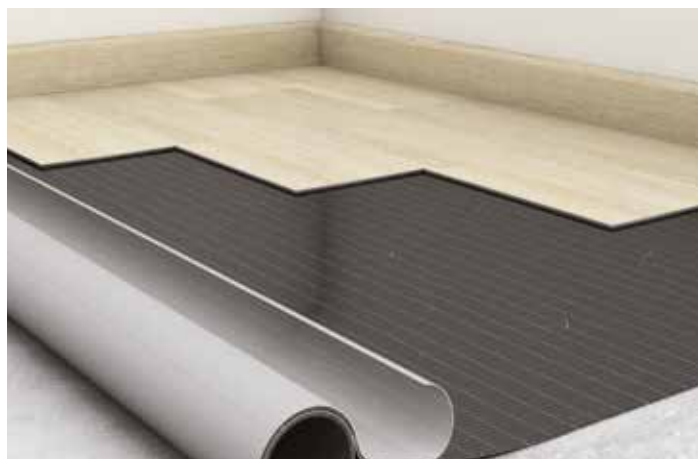

SUBFLOOR TYPE & APPLICATION

- Residential and commercial applications**
- Concrete, existing hard floorings

COMPATIBLE FLOORING

- ✓ LVT glued and loose-laid flooring (planks or tiles)

DESCRIPTION

Material: permanently elastic material made of mineral fillers and polyurethane binders

Total weight: 2.6kg per m²

Total thickness: 1.80mm

ARTICLE NUMBER

Article code: 24992040

Packaging: single roll - 8.5 x 1m (8.5m²)


Minimum order: 1 roll - no cutting service available



MORE INFORMATION


. [Tarkett website](#)

Acoustic sound reduction



- Reduces impact sound to 15dB
- Lowers walking impact and in-room noise

Time-saving and easy installation



- Consists of a transparent PET-foil to be removed, with a dimensionally stable self-adhesive side
- Works for direct installation with no additional adhesives needed
- Allows initial adjustments without difficulties (progressive adhesive side)
- Can be used immediately after installation

*Under validation

**Check with your technical service

Enhanced durability



- Features heavy-duty polyurethane layer as well as a high-class fleece side
- Stands up to static indentation: < 0.20mm
- Offers good resistance in commercial areas




COORDINATED ACCESSORIES



LVT skirting:

- rigid PVC for high resistance to impact
- PUR treatment for easy maintenance
- matching film for nice finish

Article code: 26640---



| TARKOMFORT SELF-ADHESIVE | TARKOMFORT PRO | TARKOMFORT PREMIUM | ELAFONO | TARKOMOUSSE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOFOAM II | TARKOLEX II |

TACKLE NOISE WITH OUR HIGHEST-DENSITY UNDERLAY

LVT click flooring

TARKOMFORT PRO



SUBFLOOR TYPE & APPLICATION

- Residential and commercial applications
- Concrete

COMPATIBLE FLOORING

- ✓ LVT click flooring (planks or tiles)

DESCRIPTION

Material: siliconised PET carrier film with high-resistance polyurethane layer and non-woven, white-fleece backing

Total weight: 1500g per m²

Total thickness: 1.5mm

ARTICLE NUMBER

Article code: 24992020

Packaging: single roll - 10 x 1m (10m²)


Minimum order: 1 roll - no cutting service available



MORE INFORMATION

. [Tarkett website](#)

Powerful acoustic insulation




- Reduces impact sound by 13dB with iD Inspiration Click and Starfloor Click
- Lowers in-room noise by 74dB with iD Inspiration Click and Starfloor Click

Enhanced durability



- Features high-density, heavy-duty composition (1,500g per m²)
- Stands up to static indentation: 0.10mm with iD Inspiration Click
- Offers good fire-resistance (EN 13501-1) with iD Inspiration Click: Bfl rating on concrete

Simple to install and remove



- Simplifies installation with woven anti-slip surface to grip floor covering
- Prevents damage to substrate and floor covering via full loose-lay installation
- Can be removed easily and quickly at end of life
- Allows easy access to substrate if necessary


COORDINATED ACCESSORIES



LVT skirting:

- rigid PVC for high resistance to impact
- PUR treatment for easy maintenance

Article code: 26640...

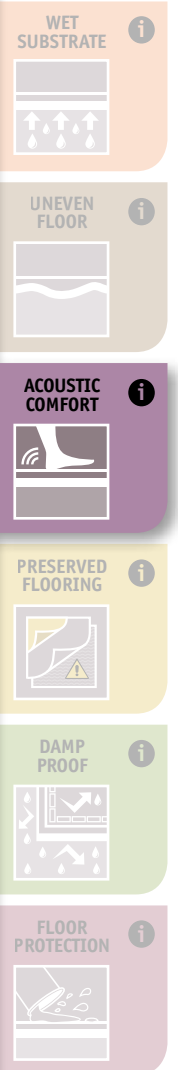

| TARKOMFORT SELF-ADHESIVE | TARKOMFORT PRO | TARKOMFORT PREMIUM | ELAFONO | TARKOMOUSSE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOFOAM II | TARKOLEX II |

TAKE THE ENGINEERED ROUTE TO ENHANCED ACOUSTIC PERFORMANCE

iD Inspiration Click TARKOMFORT PREMIUM



SUBFLOOR TYPE & APPLICATION

- Residential and commercial applications
- Screed, concrete surfaces, floorboards
- Compatible with underfloor heating

COMPATIBLE FLOORING

- ✓ iD Inspiration Click (planks)

DESCRIPTION

Material: viscoelastic polymer based on polyolefins and EVA, with double sided anti-slip texture with micro suction cup effect

Total weight: 100g per m²

Total thickness: 1.0mm

ARTICLE NUMBER

Article code: 24992030 - Black

Packaging: single roll - 15 x 1m (15m²)


Minimum order: 1 roll - no cutting service available

MORE INFORMATION

- [Step-by-step installation video](#) 📺
- [Tarkett website](#)




High-performance acoustic insulation



- Incorporates **precision engineered material** with sophisticated automotive and aeronautical technology
- Provides high-impact sound reduction (**19 dB with iD Inspiration Click**)
- Minimises **in-room noise (72 dB)**

Quick & easy to install



- Features minimal thickness, ideally suited **for renovation**
- **Simplifies handling** with 1m roll and very light weight
- Stays fixed on the ground and **prevents slipping**
- Can be used immediately in **high traffic areas**
- Offers **easy removal** at end of life with loose-lay application

High resistance to traffic



- Gives stronger resistance in heavy traffic areas via **high-density material** (100kg per m³), to provide boards from coming up
- Stands up better to static **indentation** (0.18mm with iD Inspiration Click)



COORDINATED ACCESSORIES



LVT skirting:

- rigid PVC for high resistance to impact
- PUR treatment for easy maintenance
- matching film for nice finish

Article code: 26640----



| TARKOMFORT SELF-ADHESIVE | TARKOMFORT PRO | TARKOMFORT PREMIUM | ELAFONO | TARKOMOUSSE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOFOAM II | TARKOLEX II |

CHOOSE THE NATURAL ROUTE TO ACOUSTIC COMFORT

For Linoleum and Homogeneous vinyl flooring
ELAFONO



SUBFLOOR TYPE & APPLICATION

- Commercial applications
- Concrete surfaces

COMPATIBLE FLOORING

- ✓ Compact linoleum flooring (rolls)
- ✓ Homogeneous vinyls (rolls)

DESCRIPTION

Material: cork linoleum underlayer

Total weight: 1,450g per m²

Total thickness: 2.0mm

ARTICLE NUMBER

Article code: 1861030 – Brown

Packaging: single roll – ≤ 30 x 2m


Minimum order: 1 roll – also available as 608x608mm pre-cuts for access floor producers

MORE INFORMATION

- [Installation instructions](#) ⓘ
- [Tarkett website](#)




Natural noise reduction




- Reduces **in-room noise** (up to 66dB) and **impact sound** (up to 15dB) in combination with any compact linoleum
- Features a **100% natural**, sustainable backing layer
- Produces **very low VOC emissions**

Quick and easy installation




- Highly **flexible** underlay solution
- Is also available in laminated version (Veneto and Style Emme designs): ready-to-install solution with 15dB impact noise reduction

Superior performance




- Stands up to **static indentation**
- Offers excellent **thermal resistance**
- Ensures greater **underfoot comfort**

COORDINATED ACCESSORIES



Set-On-Skirting:


Article code: 1736... (6cm) / 1737... (8cm)



Preformed skirting:

- reinforced with polymere
- welded to the floor covering and glued to the wall

Article code: 1743... (100mm height)/1744... (80mm)/1745... (60mm)





Preformed outer-corner:

- welded to the floor covering and glued to the wall
- shock resistant and watertight

Article code: 1763... (100mm height)/1764... (80mm)/1765... (60mm)

GLUE RECOMMENDATION

- ⚙️ Acrylic adhesive for linoleum flooring.
- ⚠️ Pay attention to the waiting time for such adhesive. Read the installation instructions.



| TARKOMFORT SELF-ADHESIVE | TARKOMFORT PRO | TARKOMFORT PREMIUM | ELAFONO | TARKOMOUSSE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOFOAM II | TARKOLEX II |

REDUCE NOISE IN WETROOMS BY UP TO 19dB

For Wetroom flooring
TARKOMOUSSE



SUBFLOOR TYPE & APPLICATION

- Concrete in wetrooms

COMPATIBLE FLOORING

- ✓ Wetroom flooring

DESCRIPTION

Material: PVC foam

Total weight: 1,200g per m²

Total thickness: 2.0mm

ARTICLE NUMBER

Article code: 3965001 - Grey

Packaging: single roll - 35 x 2m (70m²)


Minimum order: 1 roll - no cutting service available

MORE INFORMATION

. [Tarkett website](#)



Improved acoustic performance in wet areas



- Reduces **impact sound** for rooms below:
 - up to 17dB with Granit Safe.T
 - up to 18dB with Multisafe Aqua
 - up to 19dB with Granit Multisafe
- Improves **in-room acoustic performance**

Superior durability and safety




- Is made of PVC foam for **high resistance**
- Compatible with Tarkett Wetroom Concept preventing:
 - rot
 - water retention
 - fungal growth

Greater walking comfort



- Creates **quieter areas** in aged care and healthcare facilities
- Feels **warm to bare feet**
- Provides enhanced **comfort underfoot**

COORDINATED ACCESSORIES



PVC cove former (PA20):
 ■ smooth angle for better hygiene and maintenance
 Article code: 1441 000






Junction profile (PJ30):
 ■ progressive thickness between floor rising to the wall and the wall and wall covering
 Article code: 1418 001



Drains:
 ■ all compatible with Tarkomousse

GLUE RECOMMENDATION

See CSTB Technical Report n°12/11-1599*V1.



| TARKOMFORT SELF-ADHESIVE | TARKOMFORT PRO | TARKOMFORT PREMIUM | ELAFONO | TARKOMOUSSE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOFOAM II | TARKOLEX II |

MAKE THE LIVING SPACE QUIETER

For floating Laminate flooring
STANDARD FOAM 18dB



SUBFLOOR TYPE & APPLICATION

- Residential applications
- Concrete, with vapour barrier (0.2mm PE foil)

COMPATIBLE FLOORING

- ✓ Floating laminate flooring (planks)

DESCRIPTION

Material: recyclable polyethylene foam, freon-free

Total weight: 0.05kg per m²

Total thickness: 2.0mm

ARTICLE NUMBER

Article code: 8021 000

Packaging: single roll - 1 x 20m (20m²)


Minimum order: 1 unit (= 4 rolls)

MORE INFORMATION

. [Tarkett website](#)




Effective acoustic insulation



- Provides **high-impact sound reduction to 18dB** with 7mm laminate products
- **Minimises drum-sound to 15.5%** (DIN 45631)

Greater comfort



- **Enhances living spaces** by making them quieter
- Ensures **greater comfort underfoot**
- Works with **underfloor heating**

Durable and safe




- Offers **better durability** via polyethylene-foam composition
- **Contains no freon**, better for people and the environment

COORDINATED ACCESSORIES FOR LAMINATE FLOORINGS






Installation tape:

- designed for use with underlayers beneath laminate
 - easy to use
- Article code: 8026 000



Large skirtings:

- perfect match with flooring design
 - shock-resistant
- Article code: 8025_...



| TARKOMFORT SELF-ADHESIVE | TARKOMFORT PRO | TARKOMFORT PREMIUM | ELAFONO | TARKOMOUSSE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOFOAM II | TARKOLEX II |



THE ULTIMATE
FLOORING EXPERIENCE



MINIMISE NOISE, MAXIMISE COMFORT

3 IN 1 SOUNDBLOCK FOAM 19dB

For floating Laminate flooring



SUBFLOOR TYPE & APPLICATION

- Residential applications
- Concrete

COMPATIBLE FLOORING

- ✓ Floating laminate flooring (planks)

DESCRIPTION

Material: recyclable polyethylene foam, freon-free, with closed-cell structure

Total weight: 0.2kg per m²

Total thickness: 3.0mm

ARTICLE NUMBER

Article code: 8267 000

Packaging: single roll - 1.2 x 16.7m (20m²)


Minimum order: 1 unit (= 1 roll)

MORE INFORMATION

. [Tarkett website](https://www.tarkett.com)




High-performance acoustic insulation



- Provides **high-impact sound reduction, to 19dB** with 7mm laminate products
- Minimises drum-sound

Greater comfort



- Enhances living spaces by making them quieter
- Ensures **greater comfort underfoot**
- Works with **underfloor heating**

Superior durability and safety




- Consists of 3mm polyethylene foam with a closed-cell structure for **improved long-term resistance**
- Contains **no freon**, better for people and the environment

COORDINATED ACCESSORIES FOR LAMINATE FLOORINGS






Installation tape:

- designed for use with underlayers beneath laminate
 - easy to use
- Article code: 8026 000



Large skirtings:

- perfect match with flooring design
 - shock-resistant
- Article code: 8025---



| TARKOMFORT SELF-ADHESIVE | TARKOMFORT PRO | TARKOMFORT PREMIUM | ELAFONO | TARKOMOUSSE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOFOAM II | TARKOLEX II |



THE ULTIMATE
FLOORING EXPERIENCE



MAKE LIFE PEACEFUL AND EASY ON WOODEN SUBFLOORS

For Wood flooring
TARKOFOAM II



SUBFLOOR TYPE & APPLICATION

- Residential and commercial applications
- Wood-based panels
- Existing wooden floor

COMPATIBLE FLOORING

- ✓ Wood flooring (planks)

DESCRIPTION

Material: polyethylene foam

Total weight: 60g per m²

Total thickness: 2.0mm

ARTICLE NUMBER

Article code: 8790 314 (15m²) / 8790 315 (70m²)


Packaging: single roll - 13.04 x 1.15m (15m²) - 61 x 1.15m (70m²)

Minimum order: 1 roll - no cutting service available

MORE INFORMATION

• [Tarkett website](#)

High-performance acoustic insulation




- Provides high-impact sound reduction, up to 19dB with 14mm wood flooring

Superior durability



- Consists of polyethylene foam for extreme durability
- Evens out small irregularities
- Provides stronger resistance via high-density composition (60g per m²)
- Withstands the effects of ageing for 50 years (compliant with the ISO standard 1798)

Greater comfort



- Enhances living spaces by making them quieter
- Ensures greater comfort underfoot

COORDINATED ACCESSORIES




Solid transition strips:

- designed to link a range of floor thicknesses
 - large assortment of wood types
 - user-friendly system
- Article code: 87911----

Clipstar skirtings (veneer):

- natural and stained
- compatible with Clip System Clipstar
- lacquered for a perfect finish

Article code:
87917--- / 87918---



| TARKOMFORT SELF-ADHESIVE | TARKOMFORT PRO | TARKOMFORT PREMIUM | ELAFONO | TARKOMOUSSE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | **TARKOFOAM II** | TARKOLEX II |



THE ULTIMATE
FLOORING EXPERIENCE

TARKO
SOLUTIONS

Underlayers
& overlayers

BRING QUIET AND COMFORT TO YOUR SPACE

For Wood flooring
TARKOFLEX II



SUBFLOOR TYPE & APPLICATION

- Residential and commercial applications
- Concrete
- Ceramic tiles
- Underfloor heating

COMPATIBLE FLOORING

- ✓ Wood flooring (planks)

DESCRIPTION

Material: polyethylene foam with a 100µ moisture-barrier film

Total weight: 150g per m²

Total thickness: 2.0mm

ARTICLE NUMBER

Article code: 8790 312 (15m²) / 8790 316 (70m²)


Packaging: single roll - 15 x 1m (15m²) - 70 x 1m (70m²)

Minimum order: 1 roll - no cutting service available

MORE INFORMATION

• [Tarkett website](#)

High-performance acoustic insulation



- Provides high-impact sound reduction, up to 19 dB with 14mm wood flooring

Superior durability




- Consists of polyethylene foam for extreme durability
- Provides stronger resistance via high-density composition (150g per m²)
- Withstands the effects of ageing for 50 years (compliant with the ISO standard 1798)

Greater comfort



- Enhances living spaces by making them quieter
- Ensures greater comfort underfoot
- Works with underfloor heating

COORDINATED ACCESSORIES





Solid transition strips:

- designed to link a range of floor thicknesses
 - large assortment of wood types
 - user-friendly system
- Article code: 87911----

Clipstar skirtings (veneer):

- natural and stained
- compatible with Clip System Clipstar
- lacquered for a perfect finish

Article code:
87917--- / 87918---



| TARKOMFORT SELF-ADHESIVE | TARKOMFORT PRO | TARKOMFORT PREMIUM | ELAFONO | TARKOMOUSSE | STANDARD FOAM 18dB | 3 IN 1 SOUNDBLOCK FOAM 19dB | TARKOFOAM II | TARKOLEX II |

PROVIDE THE BEST SOLUTION FOR TEMPORARY INSTALLATIONS

For LVT click and LVT glued
& Heterogenous and Homogeneous vinyl flooring
TARKOFLAT LOOSE-LAY



SUBFLOOR TYPE & APPLICATION

- Residential and light traffic commercial applications
- Old floorings granite, marble, tiles, wood floors
- Temporary installation (events, exhibitions)

COMPATIBLE FLOORING

- ✓ LVT Click and LVT glued flooring (planks or tiles)
- ✓ Heterogenous and homogeneous rolls for up to 1 month

DESCRIPTION

Material: calandered PVC foil, loose-lay (naked)

Total weight: 1,500g per m²

Total thickness: 1.0mm

ARTICLE NUMBER

Article code: 3568004 - Grey

Packaging: single roll - 25m x 2m (50m²)


Minimum order: 1 roll - no cutting service available

MORE INFORMATION

. [Tarkett website](https://www.tarkett.com)




Preservation of existing flooring




- Allows **installation over existing flooring** (solid wood floorings, ceramics and marble floors)
- **Prevents from telegraphic effect**, the appearance of bumps and ridges from the existing flooring
- Simplifies removal at end of life

Quick and easy installation



- Rolls out easily for **quick coverage**
- **Minimises downtime** during installation

Temporary events and exhibitions



- **Protects the flooring** during temporary use in luxury environments (high-quality wood, marble)
- Can be **used of up to 1 month** with vinyl flooring in rolls

COORDINATED ACCESSORIES FOR LVT FLOORINGS




Skirting:

- rigid PVC for high resistance to impact
- PUR treatment for easy maintenance
- matching film for nice finish

Article code: 26640_...

COORDINATED ACCESSORIES FOR HETEROGENEOUS FLOORINGS



Semi flexible skirting (KS61)

- PVC semi-rigid skirting

Article code: 14110_...

GLUE RECOMMENDATION





Specific acrylic adhesive for gluing PVC over PVC*.



We recommend to downsize the spatula type.

*Check with your technical service



| TARKOFLAT LOOSE-LAY EVENT | TARKOFLAT LOOSE-LAY ASBESTOS |



THE ULTIMATE
FLOORING EXPERIENCE

TARKO
SOLUTIONS

Underlayers
& overlayers

PROVIDE INSULATION FROM ASBESTOS TILES

For LVT click and LVT glued and Heterogeneous vinyl flooring

TARKOFLAT LOOSE-LAY



SUBFLOOR TYPE & APPLICATION

- Residential applications
- Asbestos tiles
- Renovation: old ceramics, granite, marble, tiles, wood flooring, cement substrates

COMPATIBLE FLOORING

- ✓ LVT glued flooring (planks or tiles)
- ✓ Heterogeneous vinyl rolls (only for closed asbestos tiles)

DESCRIPTION

Material: calandered PVC foil, loose-lay (naked)

Total weight: 1,500g per m²

Total thickness: 1.0mm

ARTICLE NUMBER

Article code: 3568004 - Grey

Packaging: single roll - 25m x 2m (50m²)


Minimum order: 1 roll - no cutting service available

MORE INFORMATION

. [Tarkett website](#)




Safe and traceable over time




- Forms a **barrier around the asbestos tiles** without causing damage
- Provides **long-life protection**
- Allows **access to subfloor**, making asbestos tiles easy to find for improved traceability

Cost effective



- Delivers **significant cost savings:** avoids lengthy and expensive removal process (average cost ~100€)

Quick and easy to install



- Rolls out easily for quick coverage
- Can be used with **heterogeneous rolls on sealed asbestos tiles**
- Offers even faster installation with **Tarkospray**

COORDINATED ACCESSORIES FOR LVT FLOORINGS




Skirting:

- rigid PVC for high resistance to impact
- PUR treatment for easy maintenance
- matching film for nice finish

Article code: 26640---

COORDINATED ACCESSORIES FOR HETEROGENEOUS FLOORINGS



Semi flexible skirting (KS61)

- PVC semi-rigid skirting

Article code: 14110---




GLUES RECOMMENDATION



Tarkospray

- a water based and easy to use flooring adhesive as a spray

Article code: 1460 001 / 1460 005



| TARKOFLAT LOOSE-LAY EVENT | TARKOFLAT LOOSE-LAY ASBESTOS |

CREATE WATERPROOF IN WETROOM

TARKODRY FLOOR & WALL

For Ceramic tiles



SUBFLOOR TYPE & APPLICATION

- Residential and commercial applications
- Cement substrates, cardboard dressed plaster

COMPATIBLE FLOORINGS & WALLS

- ✓ Ceramic tiles

DESCRIPTION

Material: homogeneous PVC underlayer

Total weight Floor: 2,600g per m² / **Wall:** 2,000g per m²

Total thickness Floor: 1.5mm / **Wall:** 1.2mm

ARTICLE NUMBER

Article code Floor: 3138 027 - Grey / **Wall:** 3137 028 - Grey

Packaging Floor: single roll - 20m x 2m (40m²)

Wall: single roll - 35m x 2m (70m²)

Minimum order: 1 roll - no cutting service available

MORE INFORMATION

- [Tarkett website \(TarkoDry Wall\)](#)
- [Tarkett website \(TarkoDry Floor\)](#)




Safety and long-life




- Creates a **watertight layer under ceramic tiles**, approved for use in wetrooms
- Makes replacing broken ceramic tiles easy with no **membrane damage**
- Comes with low VOC content and **phthalate-free technology**

Long-term waterproof warranty




- Forms a **water- and air-tight barrier**, even with high temperature difference
- **Can be repaired** if damaged (eg holes drilled through the membrane)

Quick and easy installation



- **Simplifies installation and hot welding** thanks to its internally flexible homogenous structure
- Provides **good adhesion** via its embossed surface

COORDINATED ACCESSORIES



Homogeneous hot welding rods:



- for perfect water tightness and seam strength

- available with all designs and colours

Border:

- matching borders with TarkoDry
- waterproof installation

Article code: 3088 000



| TARKODRY FLOOR |



THE ULTIMATE
FLOORING EXPERIENCE

TARKO
SOLUTIONS

Underlayers
& overlayers

PROTECT EFFICIENTLY YOUR FLOORS BEFORE THEIR FIRST USE

For all types of flooring
TARKOPROTECT 180



COMPATIBLE FLOORING & APPLICATION

✓ All types

DESCRIPTION

Material: tackified polyester veil reinforced with PE foil

Total weight: 180g per m²

Total thickness: 1.2mm

ARTICLE NUMBER

Article code: 24990000 - White

Packaging: single roll - 50m x 1m (50m²)

Minimum order: 1 roll - no cutting service available



MORE INFORMATION


. [Tarkett website](#)

Comprehensive protection and safety



- **Protects any new floor** covering against dust, dirt, mechanical damage, tears, scratches and spillages (PET liquid barrier)
- **Adheres** to flooring to prevent any movement or twist and resist rolling loads
- Comes with a non-slippery surface to prevent falls

Cost-effective installation






- **Avoids expensive cleaning** or replacement
- Removes the need for glue with **integrated tackifier effect**
- Makes **handling easy** thanks to light weight

Easy removal and re-use



- Requires simple **loose-lay installation**
- Leaves **no residue on floor** after removal
- Offers **flexibility** through re-use elsewhere
- Features **environmentally friendly** textile construction



| TARKOPROTECT 180 | TARKOPROTECT 240 |

OFFER THE HIGHEST PROTECTION TO YOUR FLOORING BEFORE USAGE

For all types of flooring
TARKOPROTECT 240



COMPATIBLE FLOORING & APPLICATION

✓ All types

DESCRIPTION

Material: tackified polyester veil reinforced with PE foil

Total weight: 240g per m²

Total thickness: 1.2mm

ARTICLE NUMBER

Article code: 24991000 - White

Packaging: single roll - 25m x 1m (25m²)

Minimum order: 1 roll - no cutting service available



MORE INFORMATION


. [Tarkett website](#)

Ultimate protection and safety



- **Protects any new floor** covering against dust, dirt, mechanical damage, tears, scratches and spillages (PET liquid barrier)
- Offers **exceptional resistance to liquid**, absorbing **up to 1 litre of water per m²**
- **Adheres** to flooring to prevent any movement or twist and resist rolling loads
- Comes with a non-slippery surface to prevent falls

Cost-effective installation




- **Avoids expensive** cleaning or replacement
- Removes the need for glue with **integrated tackifier effect**
- Makes **handling easy** thanks to light weight

Easy removal and re-use



- Requires simple **loose-lay installation**
- Leaves **no residue on floor** after removal
- Offers **flexibility** through re-use elsewhere
- Features **environmentally friendly** textile construction

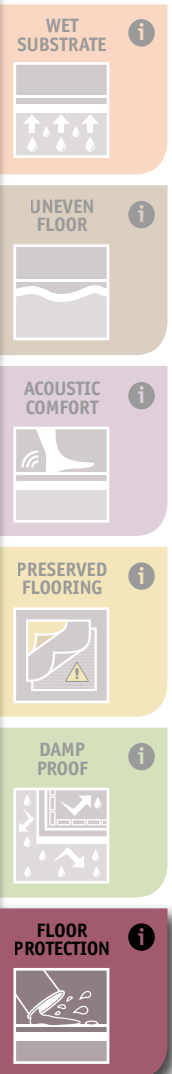

| TARKOPROTECT 180 | TARKOPROTECT 240 |

SUBFLOOR CONTROL



The subfloor quality is the 1st condition for a successful installation.

Always bear in mind that in most countries, the installer is responsible for the acceptance of the subfloor on which he will do the installation.




You cannot lay the flooring if the substrate is wet. It may cause issues as odours or subfloor damages during life time. To avoid such damages, you can use an underlayer that allows to ventilate the subfloor and not to hold back the humidity. Tarkolay can cope with up to 7% humidity rate CCM. Always refer to each country regulations for humidity rate.



Laying a flooring on an uneven substrate may cause telegraphic effects, with appearance of bumps and ridges from the substrate. If irregularities do not exceed 1.5mm depth and 3mm width, you may use an underlayer to level the floor.



Acoustic comfort is today's main priority for people. If the building or house is not equipped, acoustic performance can be improved by an underlayer, depending on the flooring you laid. An acoustic underlayer enhances the impact sound and in-room noise reduction.



In some cases, one flooring is laid above another:
-if you want to keep the existing flooring installed
-if a temporary event takes place and luxury floorings must be protected
-if you want to cover the existing asbestos tiles (in France) before laying another flooring
For these specific issues, laying an underlayer is a true answer: it allows installations over existing flooring and prevents from telegraphic effect*. The removal at end of life is simple and very easy.

*By up to 1.5mm depth and 3mm width for LVT floorings (and vinyl rolls for up to one month).



In damp environments such as wetroom, when traditional solution of ceramic is used, sealing is not 100% waterproof and can be damaged over time (water can penetrate till the substrate and causes damages). Repairs can be expensive. So it may be necessary to install a system for waterproofing the room. Before laying the ceramics and making the seals, you can lay an underlayer that forms a water- and air-tight barrier, ensuring waterproofness.



Once the floor is laid, some other building professions can take action at the same time. The floor needs to be protected so nothing bad can happen. Our overlayers provide a safe and high-performant protection during this time (up to 1L of water per m² for Tarkoprotect 180) and are easy to remove.