

Special Plus PUR

HOMOGENEOUS VINYL

The Fresh soft
classics of
Homogeneous
solutions

Special Plus PUR

COLLECTION



306001 514



306001 507




306001 516



306001 517



306001 501

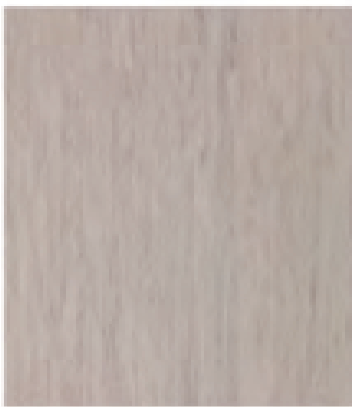


306001 515



306001 505



306001 506

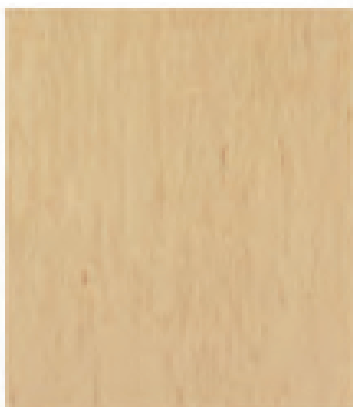

306001 502



306001 503



306001 504



306001 511



306001 518



306001 508



306001 509



306001 512

Special Plus PUR

TECHNICAL DATA

Classification	Standards	Special Plus PUR
Classification	EN ISO 10581	Homogeneous Vinyl Flooring
	EN ISO 10874	Commercial: 34 Industrial: 43
Wear Layer binder content	EN ISO 10581	Type II

Technical characteristics

Total thickness	EN ISO 24346	2.0 mm
Wear layer thickness	EN ISO 24340	2.0 mm
Total weight	EN ISO 23997	3200 g/m²
Surface treatment (PUR)	-	PUR
Form of delivery	EN ISO 24341 Sheet (rolls)	Approx. 23 running meters x 200 cm Art. No. 306001 _ _ _ 3 digit colour number

Technical performance

Reaction to Fire	EN 13501-1	Bfl-s1
Residual Indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Best measured value*: 0.04 mm
Slip resistance	DIN 51130	R9
Castor chair	ISO 4918	No damage
Chemical resistance	EN ISO 26987	Good resistance
Bacteria resistance	ISO 846 Part C	Does not favour growth
Total VOC emissions	ISO 16000-9	≤ 10 µg/m³ (after 28 days)
Colours	-	16

The above information is subject to modification for the benefit of further improvement (05/2023).
For the latest information, please visit our website: www.Tarkett-asia.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.

