

HOMOGENEOUS
NON-PVC
THERMOPLASTIC
FLOOR

iQ ONE



iQ One represents a new generation of resilient flooring. As a member of the iQ family, iQ One offers a perfect balance between aesthetics, flexibility and strength for specific demands. Its innovative, non-PVC formula provides the same unique benefits that have made iQ a recognised name for decades.

NON
PVC



THE ULTIMATE
FLOORING EXPERIENCE



A TRUE INNOVATION

Meet iQ One! Just as strong and flexible as Tarkett's other iQ products.

We have developed a unique non-PVC formula of homogeneous thermoplastic flooring that preserves all the unique properties of our iQ range.

Consisting of a patented blend of thermoplastic polymers, iQ One contains neither PVC nor plasticizers. It is ideal for areas with specific requirements, offering superior resistance needed in high-traffic public areas, education and healthcare facilities.

Superior everyday performance

Thanks to its high wear resistance, good functional and environmental characteristics, and the lowest life cycle costs on the market, iQ One is suitable for high-traffic public areas.

Mix and match!

The iQ One collection comes in an array of 38 colours and 3 non-directional patterns: Dusty, Classic and Misty. The 3 patterns provide variety and let you mix and match to create coordinated and harmonious decors, available with coordinated non-PVC welding rods for a perfect finish.

Easy to install

iQ One is extremely flexible and easy to cover up walls, install around pipes and fold down into floor drains, for perfect coving and a watertight finish. iQ One is available in 2-metre-wide rolls and is wet room approved.

Excellent environmental properties

Our Cradle to Cradle® approach ensures we design our products to contribute positively to the environment and to people's well-being at each step of the product's life. We're committed to a circular economy where resources are continually reused and recycled—creating products today that become the raw materials of tomorrow.


iQ One is the first homogeneous flooring certified Cradle to Cradle® Gold level.

- Cradle to Cradle Gold Certified™
- Non-PVC
- Phthalate-free
- Low VOC emissions
- 100% recyclable
- No biocides


iQ One Misty patterns can help to provide interiors that have a **positive influence**, through its naturally soft palette.




558 Dusty Sand




363 Misty Grey




240 Orange




396 Purple




218 Sand



598 Dusty Blue



116 Light Warm Grey




555 Dusty Grey


Colour, energy, pure lines, contemporary...
iQ One Classic Colours and Dusty patterns put interaction and comfort at the heart of technical environments, to improve their appearance and make them more reassuring.



The Colours version of the Classic Pattern is strong and dynamic and can be matched with Classic Neutrals to create different atmospheres, design accents and add contrast in lively, vibrant spaces.

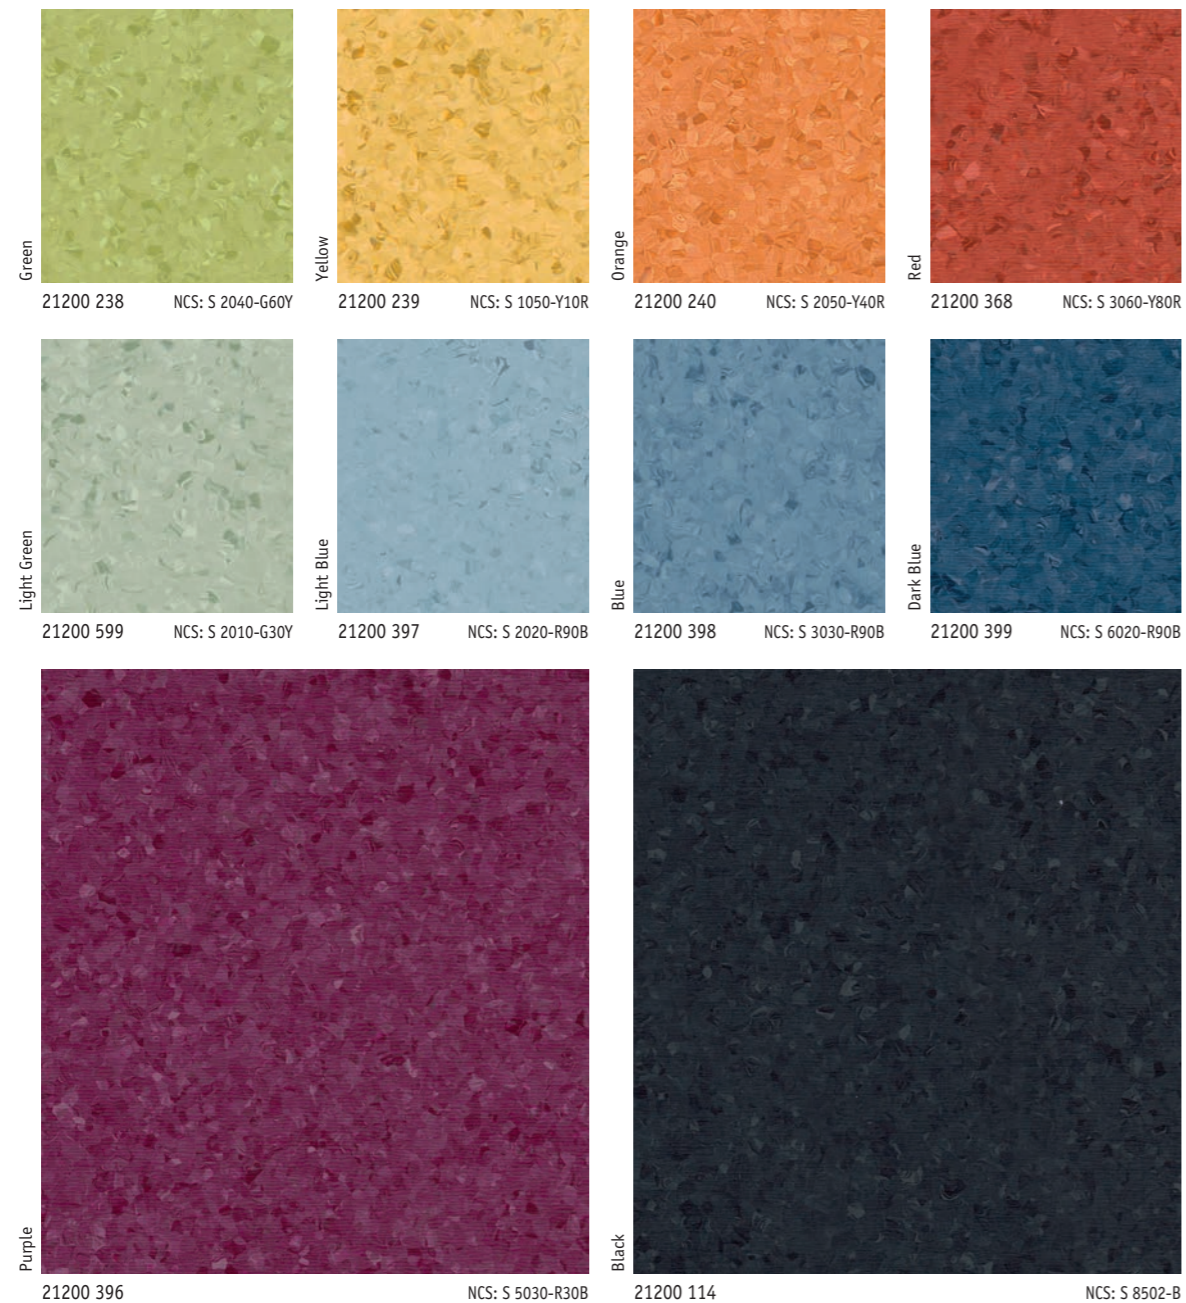


The full range of Neutrals is comprised of smooth and soft colours, including a full range of greys and beiges, and covers the full lightness scale. Neutrals are the perfect base for relaxing, quiet areas, as well as functional zones. They can be combined with Colours to create harmonious colour accords.

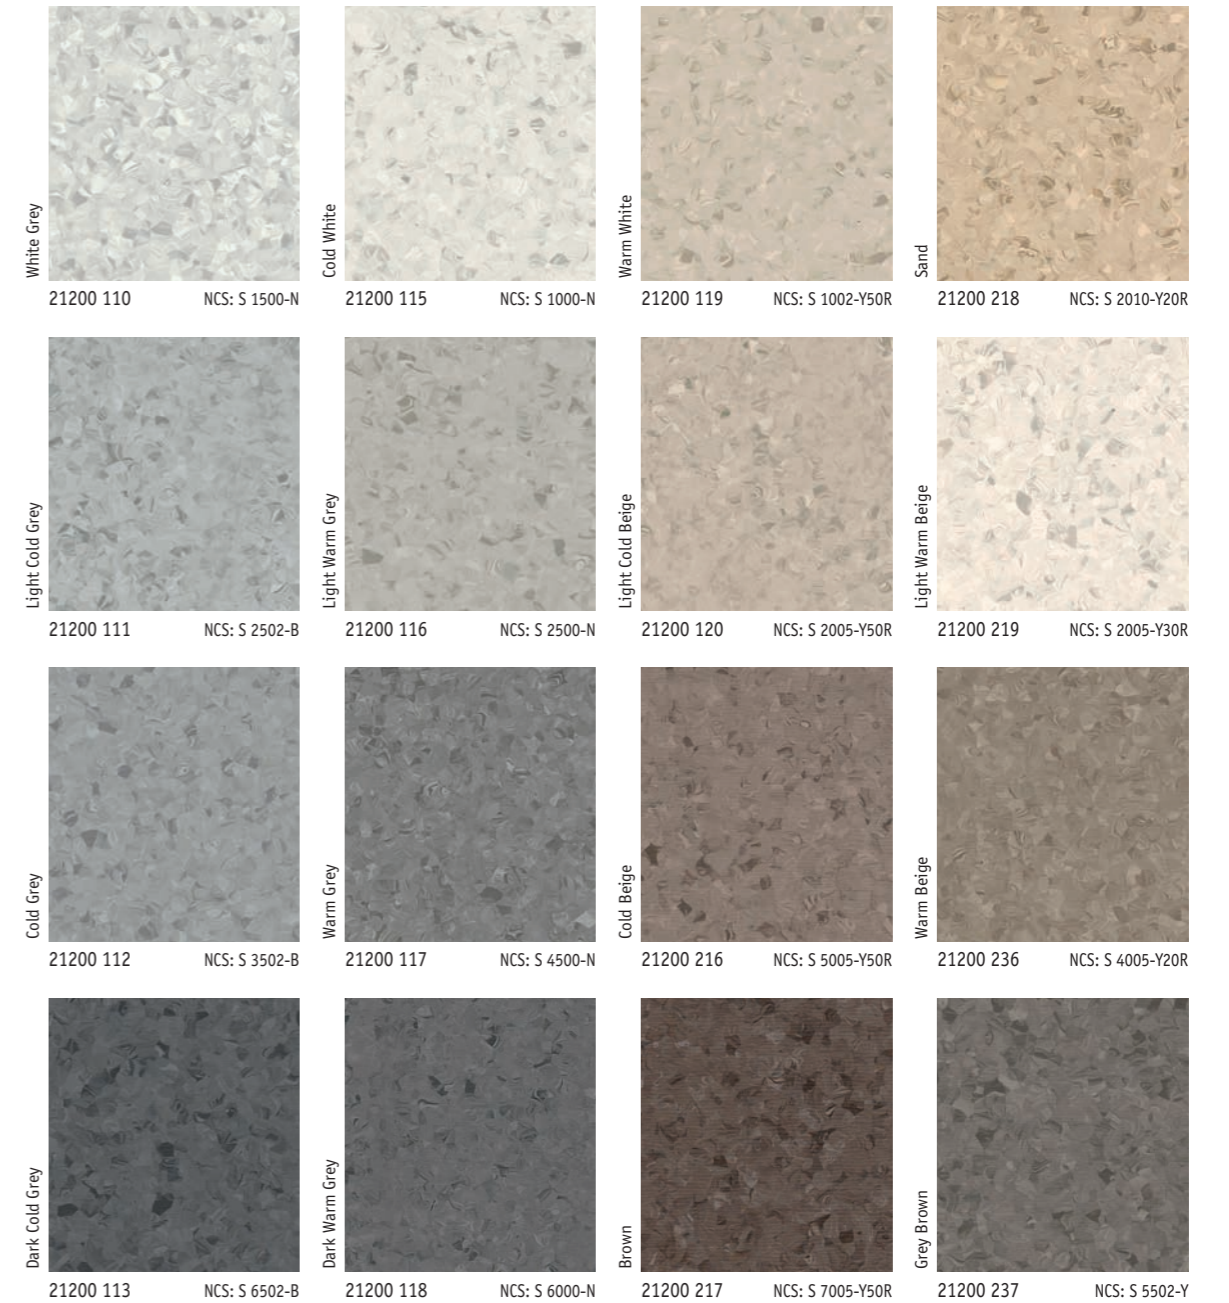

iQ ONE Dusty




Each Dusty pattern reference combines a spectrum of tones and contrasts that smoothly meets the requirements of high-traffic areas.

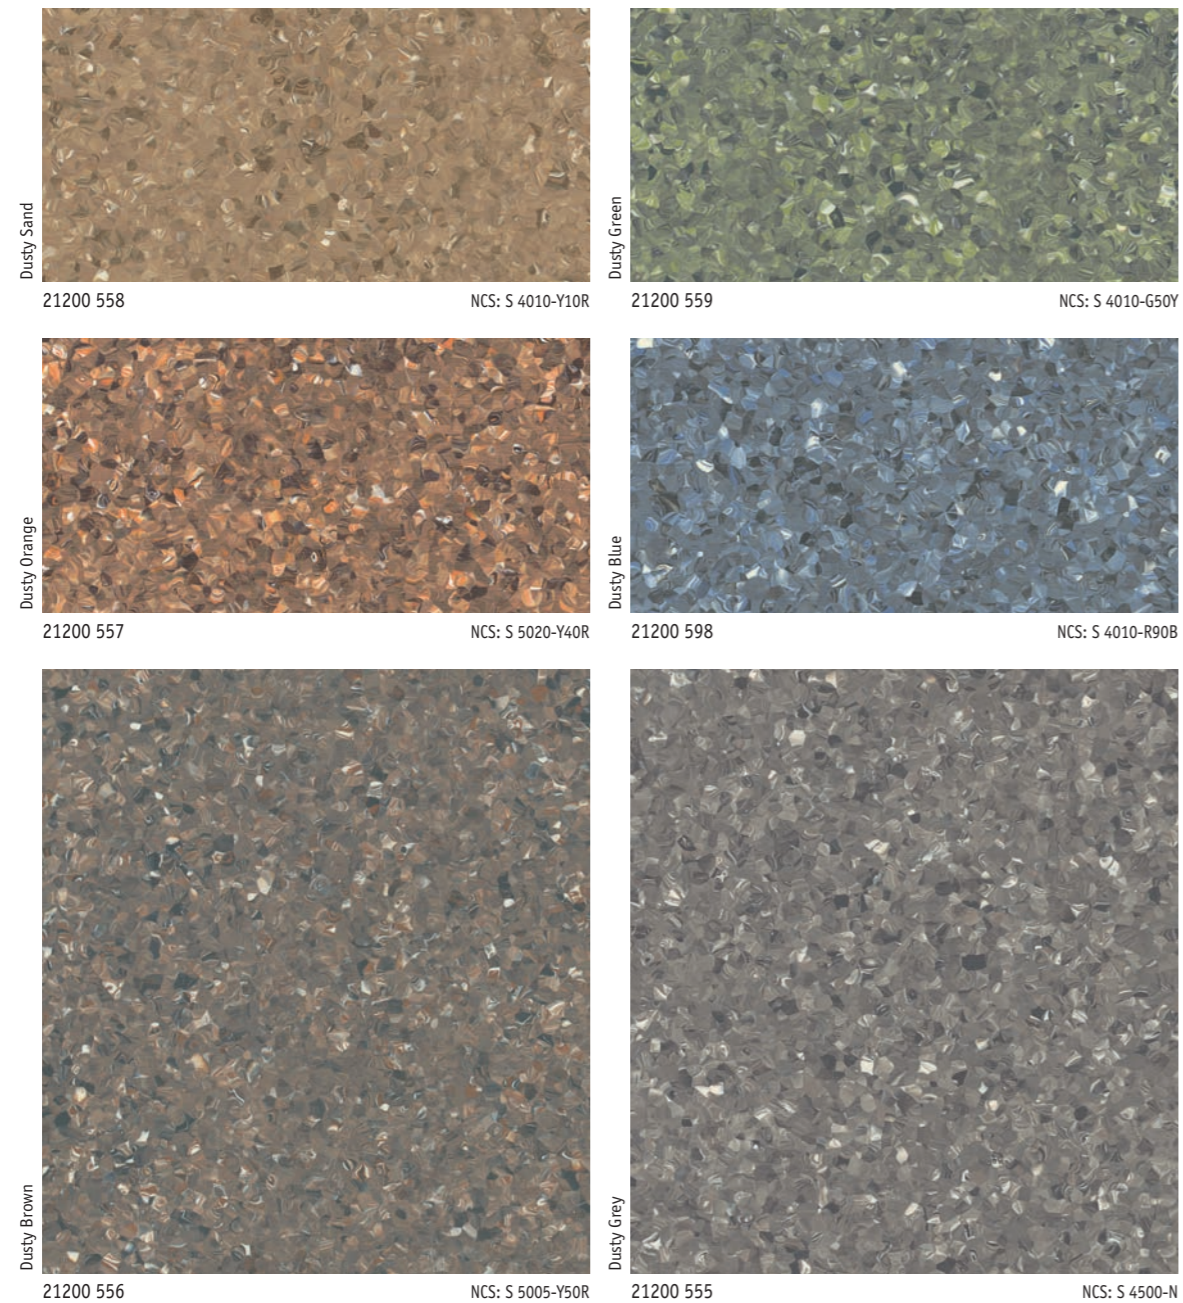

iQ ONE Misty




The Misty Pattern's colour range provides soft, gentle tones reminiscent of nature's palette. It has been specifically developed to meet the low contrast needs of special requirement areas.

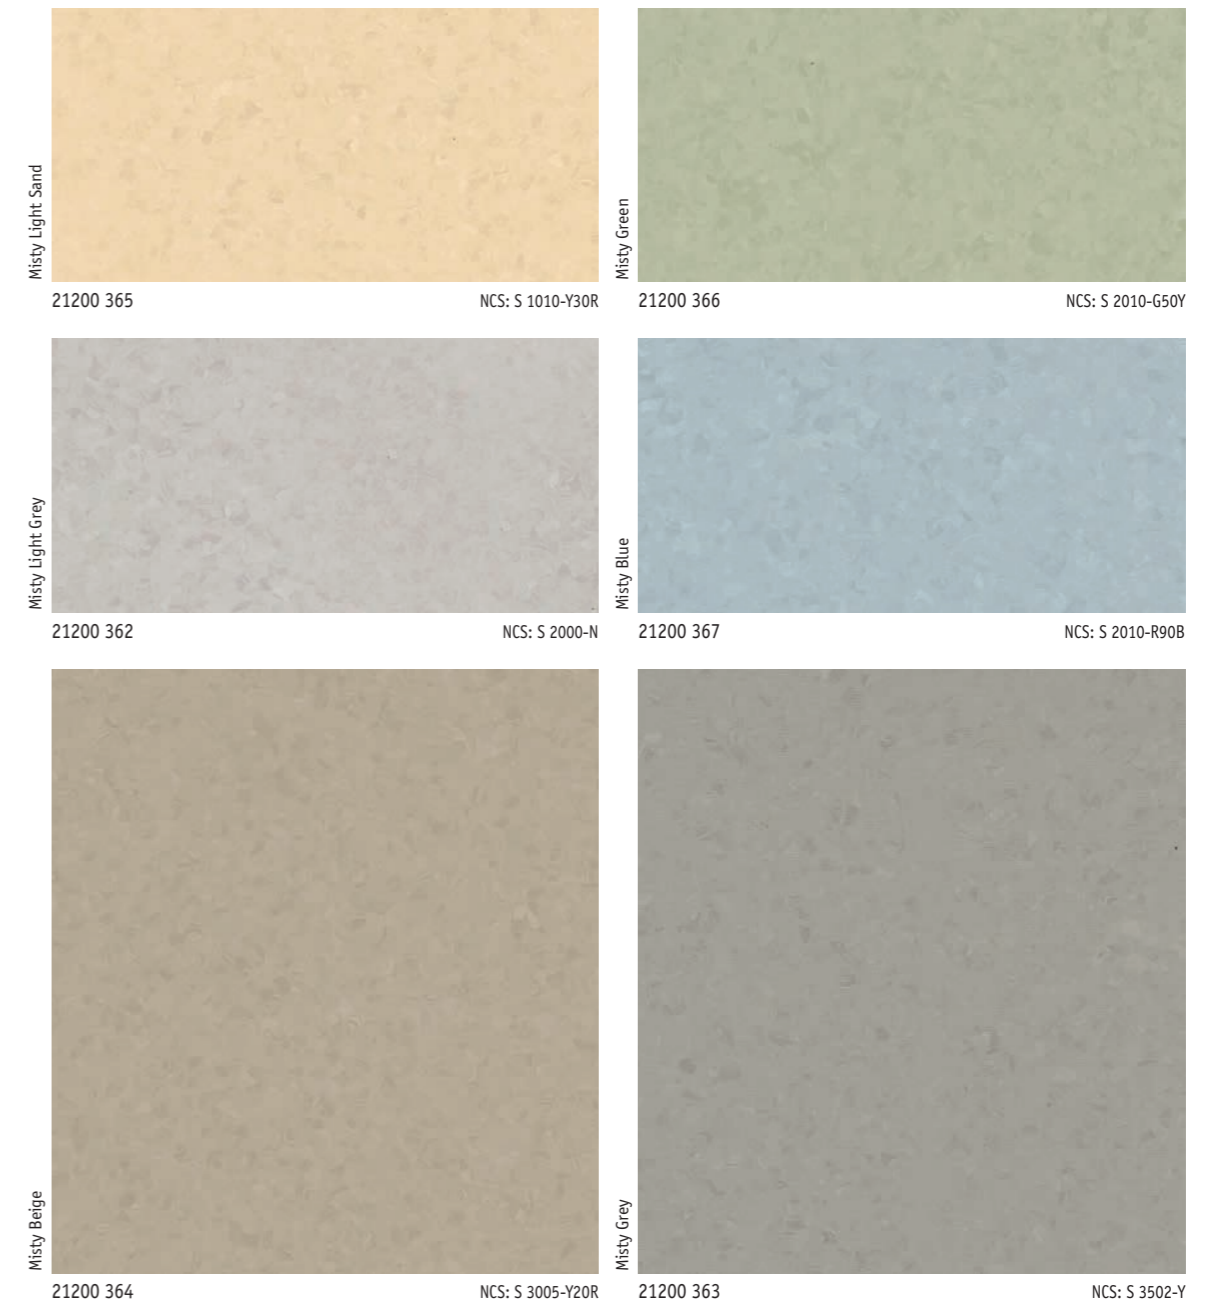


WELDING RODS

- Unicolor 4mm welding rods coordinated for every iQ One reference
- Designed to join floorcovering for a perfect finish
- Heat welded for perfect hygiene and easy cleaning

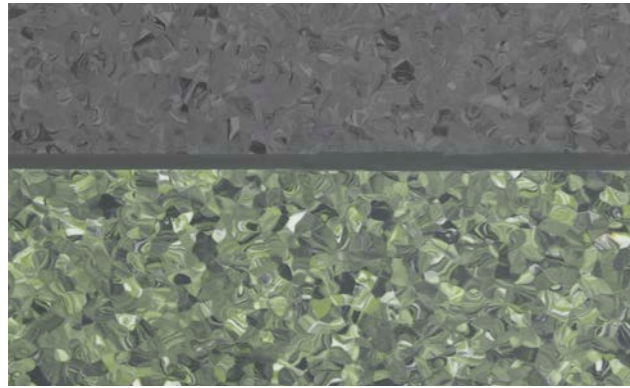

Coordinated welding rod for a nice finish

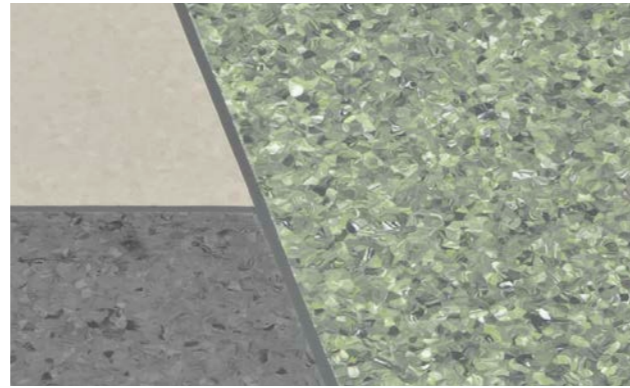

Mix and match to create harmonious decors

iQ One	Welding rods	iQ One	Welding rods	iQ One	Welding rods
21200 110	21201 001	21200 219	21201 015	21200 397	21201 023
21200 111	21201 002	21200 236	21201 016	21200 398	21201 024
21200 112	21201 003	21200 237	21201 017	21200 399	21201 025
21200 113	21201 004	21200 238	21201 018	21200 555	21201 033
21200 114	21201 005	21200 239	21201 019	21200 556	21201 034
21200 115	21201 006	21200 240	21201 020	21200 557	21201 035
21200 116	21201 007	21200 362	21201 027	21200 558	21201 036
21200 117	21201 008	21200 363	21201 028	21200 559	21201 037
21200 118	21201 009	21200 364	21201 029	21200 598	21201 038
21200 119	21201 010	21200 365	21201 030	21200 599	21201 026
21200 120	21201 011	21200 366	21201 031		
21200 216	21201 012	21200 367	21201 032		
21200 217	21201 013	21200 368	21201 021		
21200 218	21201 014	21200 396	21201 022		

COVING

- Outstanding flexibility
- Easy to cover up walls, install around pipes and fold down into floor drains
- Wet room approved, perfect watertightness



TECHNICAL DATA

CERTIFICATION & CLASSIFICATION	STANDARDS	iQ One
Type of floor covering	EN 14565	Homogeneous floor covering based upon synthetic thermoplastic polymers.
CE certification	EN 14041	Yes
ISO certification		Ronneby ISO 9001/ Ronneby ISO 14001

TECHNICAL CHARACTERISTICS	STANDARDS	iQ One
iQ PUR		Yes
Total thickness	ISO 24346 – EN 428	2.0 mm
Wear layer thickness	ISO 24340 – EN 429	2.0 mm
Total weight	ISO 23997 – EN 430	2800 g/m ²
Form of delivery	ISO 24341 – EN 426	Art. no. 21200_ _ _ 3 digit colour colour number
Sheet	Approx. 23 running metres x 200 cm (rolls)	


TECHNICAL PERFORMANCES	STANDARDS	iQ One
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _{fl} s1 ≥ 8 kW/m ² Pass
Total VOC emissions	ISO 16000-6	≤ 100 µg/m ³ (after 28 days)
Chemical resistance	ISO 26987 – EN 423	Excellent
Slip resistance	DIN 51130 EN 13893 BS 7976-2	R9 ≥ 0.3 Low risk of slip
Wet room approval	EN 13553 Annex A GBR approval system	Watertight Certified
Residual indentation	ISO 24343-1 – EN 433	Required value: ≤ 0.10 mm Average measured value: 0.02 mm
Dimensional stability	EN 14565 Annex C	≤ 0.20 %
Castor chair test	ISO 4918 – EN 425	Suitable
Flexibility	ISO 24344 – EN 435	Pass
Underfloor heating		Suitable – max 27 °C
Light fastness	EN ISO 105-B02	≥ level 6
Colours		38

The above information is subject to modification for the benefit of further improvement. (09/15). CUSTOMS TARIFF : 482050000000F

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.




Logistics Information



General Information



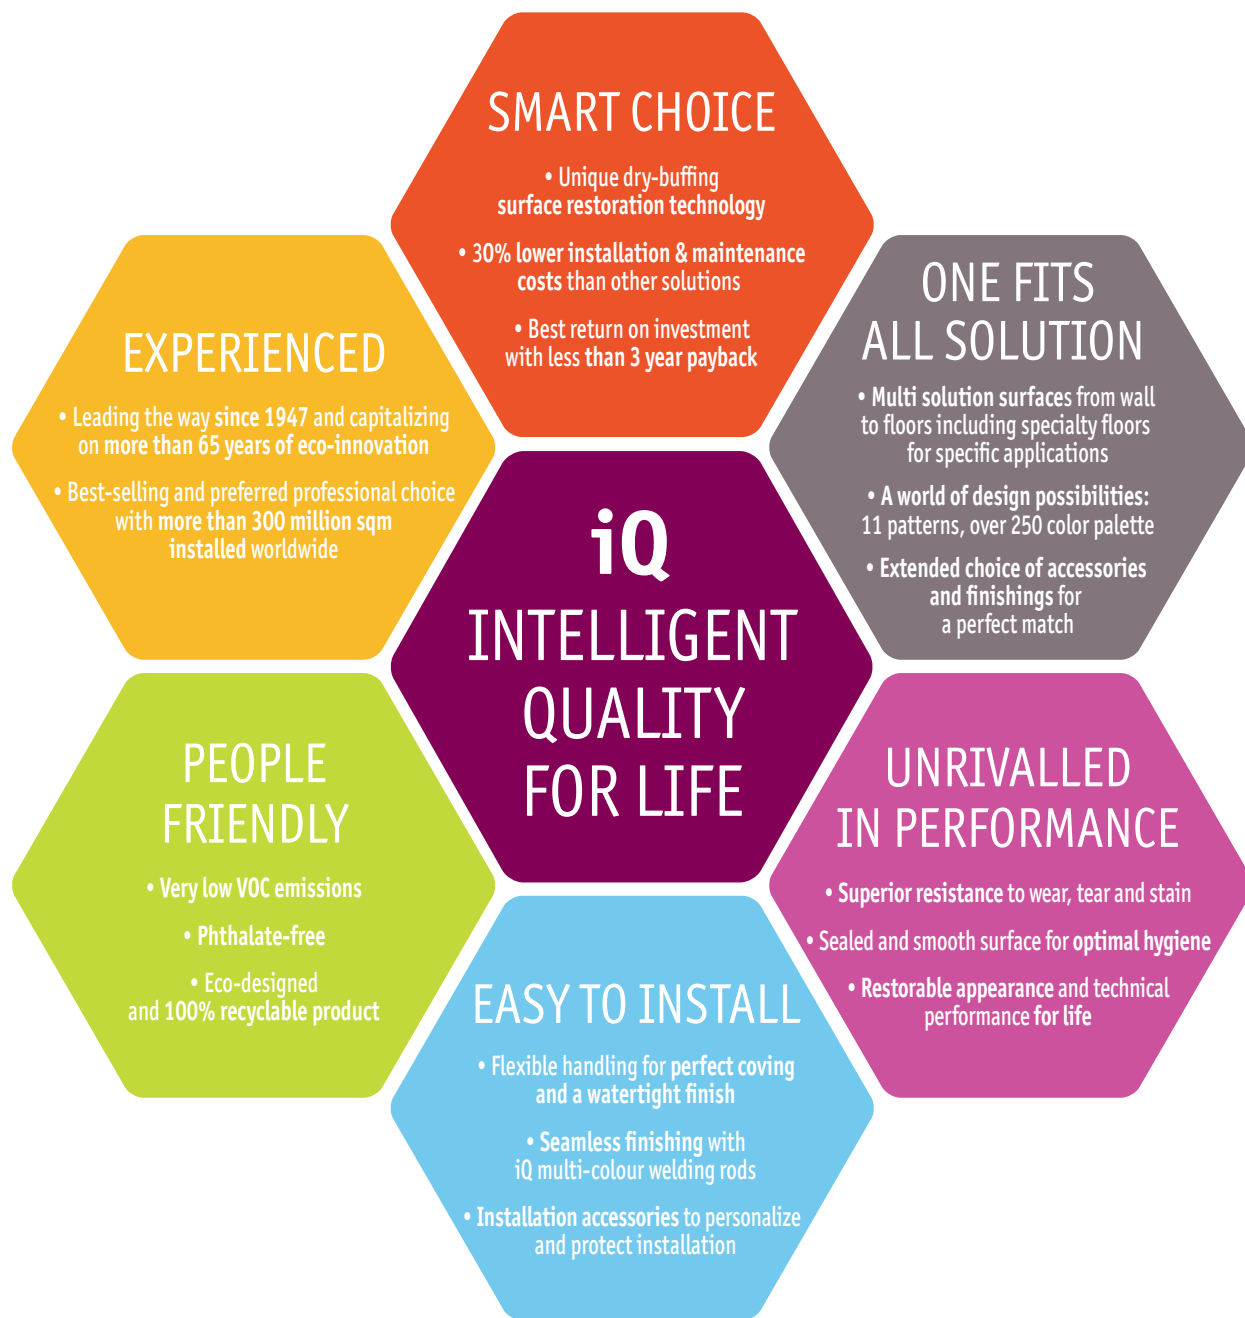

■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062
 ■ **Belgium:** Tarkett France Belux – Tel. +32 16 35 98 80 ■ **Denmark:** Tarkett A/S – Tel. +45 43 90 60 11
 ■ **Finland:** Tarkett Oy – Tel. +358 9 4257 9000 ■ **France:** Tarkett SAS – Tel. +33 1 41 20 42 49 ■ **Germany:**
 Tarkett Holding GmbH, Bereich Objekt – Tel. +49 62 33 810 ■ **Greece:** Tarkett Monoprosopi Ltd
 – Tel. +30 210 6745 340 ■ **Italy:** Tarkett S.p.A. – Tel. +39 0744 7551 ■ **Luxembourg:** Tarkett GDL SA –
 Tel. +352 949 211 8804 ■ **Netherlands:** Tarkett Holding GmbH, Vestiging Nederland – Tel. +31 76 57 80 760
 ■ **Norway:** Tarkett AS – Tel. +47 32 20 92 00 ■ **Portugal:** Tarkett SA – Tel. +351 21 427 64 20 ■ **Spain:**
 Tarkett Floors S.L – Tel. +34 91 358 00 35 ■ **Sweden:** Tarkett Sverige AB – Tel. +46 771 25 19 00
 ■ **Switzerland:** Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 ■ **Turkey:**
 Tarkett Aspen – Tel. +90 212 213 65 80 ■ **United Kingdom:** Tarkett Ltd – Tel. +44 (0) 1622 854 040
 ■ **EASTERN EUROPE:** Baltic Countries: Tarkett Baltics: Tel. +370 37 262 220 ■ **Czech Republic:** Tarkett
 France SAS, org. slozka – Tel. +420-271 001 602 ■ **Hungary:** Tarkett France SAS – Tel. +36 1 437 8150
 ■ **Poland:** Tarkett Polska Sp. z o. o. – Tel. +48 22 639 31 68 ■ **Russian Federation:** ZAO Tarkett RUS –

Tel. +7 495 775 3737 ■ **Slovakia:** Tarkett France SAS, org.zlozka – Tel. +421 248 291 317 ■ **South East Europe:**
 Tarkett Trade d.o.o. – Tel. +381 21 7557 649 (44) 569 12 21 ■ **Ukraine:** Tarkett UA – Tel: +38 (0)
 44 569 12 21 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ **China:**
 Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ **Hong Kong:** Tarkett Asia Pacific Ltd. –
 Tel. +852 2511 8716 ■ **India:** Tarkett France (India Branch) – Tel. +91 11 4352 4073 ■ **South East Asia:** Tarkett Flooring
 Singapore Pte Ltd – Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE**
EAST: Tarkett Middle East: Tel. +961 1 51 3363/4 ■ **Israel:** Tarkett International: Tel. +33 1 41 20 41 01
 ■ **NORTH AMERICA:** USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. + 1 440 543 8916
 ■ **Canada:** Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett Fademac – Tel. 55 12 3954 7108
 ■ **Other countries:** Tarkett America Latina – Tel. +55 11 3047 7200 ■ **Argentina - Chile - Uruguay:** Tarkett Latam
 Mercosur – Tel. 54 11 48 06 74 28 / 54 9 11 44 46 88 82 ■ **Colombia - Panama - Caribbean:** Tarkett Latam Andina
 – Tel. 57 1 759 5781 / 57 312 273 1566 ■ **Bolivia - Ecuador - Paraguay - Peru:** Tarkett Latam Sur Oeste – Tel.
 55 11 3047 7233 ■ **Mexico /Central America:** Tarkett Latam Mexico – Tel. 52 735 35 63 918 / 52 55 51 07 9524