



TABLE OF CONTENTS

INTRODUCTION	5
MAIN REQUIREMENTS	6
A SOLUTION FOR EVERY SPACE	3
Bedrooms	10
Living rooms	12
Kitchens	14
Bathrooms	16
Home offices	18
Entrances & hallways	20
Kids bedroom & playroom	22
TECHNICAL DATA AT A GLANCE	24
OUR REFERENCES	26



Main requirements



SUSTAINABILITY COMMITMENT

Sustainable building design is key to durable constructions that have minimal environmental impact, without compromising on quality of life. All building materials, including flooring, must meet specific norms to earn certification from one of the exacting ecobuilding systems around the world (LEED (US), BREEAM (UK), HQE (France), etc.).

Tarkett is a leader in environmentally responsible manufacturing and sustainable product development with our 4 key pillars:

- Use better materials: Natural, renewable and recycled resources, choose Cradle to Cradle products
- Use fewer resources: Limit water, energy consumption and waste generation
- Create people-friendly spaces: Lowest VOC emissions and phthalate-free technology
- Recycle program contributes to environmental protection



INDOOR AIR QUALITY

- No harmful components
- The lowest VOC emissions
- No toxic pollutants



HYGIENE, EASY CLEANING & LOW-COST MAINTENANCE

80% of dirt comes from outside and 90% of microorganisms are found in visible dirt. For good hygiene, it's important to easily clean dirt and floor soiling.

Tarkett strives to minimize your maintenance costs and make daily cleaning easier.





ACOUSTIC COMFORT

Noise levels within a room can be a real issue, and need to be controlled for enjoyable experience. Flooring is one of many construction materials that can reduce the amount of sound in a given space. To reduce noise and in accordance with building constraints, Tarkett offers a range of flooring solutions:

- to limit in-room noise linked to footsteps and furniture movements
- that ranges from class A to C (sound absorption class)



DESIGN CONCEPT

Rules have changed and flooring increasingly plays a leading role in creating highly individual spaces. The floor is the solid base that your creation builds on. It sets the tone, bringing architecture and design to life. By using the floor as your signature you'll create a distinctive atmosphere.





Bedrooms Carpet Sensa

RECOMMENDATION

Rio, Dolce Vita, Mondo, Creative, Pleasure, Vegas Home, Vegas Pop, Boho, Toscana, Savana Plus

Modena, Dragon, Sensa

Tango Vintage, Tango Classic, Step, Rumba, Bolero, Samba, Tango, Salsa, Salsa Art Vision, Ideo, Salsa Premium, Salsa Art, Performance Fashion, Tango Art

Fiesta 832, Navigator 1233, Pilot 1033, Cinema 832, Holiday 832, Universe 1433, Estetica 933, Gallery 1233, Elegance 1232, Dynasty 1233

Starfloor Click 30 & 30 Plus

New Age

Legend

Veneto xf^{2TM}

Product ty	rpe Rugs	Carpets	Parquet	Laminate	LVT	LVT	Residential vinyl	Residential vinyl	Residential vinyl	Linoleum
Main advanta	Ultra soft touch Good underfoot comfort ages	Ultra soft touch Good underfoot comfort	100% real wood Extensive range of accessories: skirtings, moldings and pipe covers in different wood species to complete the final touch Very stable multi-layer construction Proteco lacquer – one of the strongest surface protections in wood industry Suitable for self-regulating under floor heating systems (max 25 °C) Easy installation and maintenance Wide range of colours and effects	Easy installation and replacement Easy maintenance Suitable for self-regulating under floor heating system High resistance to wear and scratch	Simple click installation Resistant to scuffs, scratches and stains Easy to clean and maintain	Design opportunities Ease of installation and care Durability and ability to use in high traffic areas 100% moisture resistance Ability to install on top of floor heating	3D Effect Additional protective layer which keeps dirt away from lower layers of the product - easier cleaning & maintenance Tarkett mechanical embossing Deep graining makes it look natural, more than ever before Easy installation	Innovative effect: realistic texture with embossing in register Suitable for areas with the high usage frequencies Scratch, abrasion and scuff resistant The vinyl wear resistance is increased seven times due to its extreme surface protection	The look of real wood Additionally reinforced with Extreme Protection, which leaves no spot on the floor where dirt can stay after cleaning Certified with ecological certification - Vitality leaf Practical and hygienic solution	Superior xf ^{2TM} protection for extreme mechanical and chemical toughness The classical marbled linoleum solution with soft or intense pattern variations for a timeless effect

A living room is a personal showroom of style where the choice of decoration will be emotional.

Taking into account the type of home and the lifestyle of the inhabitants, the technical requirements may vary.

A resistant and easy-to-clean floor is best-suited for a single family home with kids and pets, whereas an acoustic and comfortable floor is more ideal for a city apartment.

The floor should also contribute to good indoor air quality since we spend more than 90% of our time indoors.




RESIDENTIAL BUILDING SUN CITY, Belgrade, Serbia,
Parquet, Rumba, Oak Savanna


Living rooms


TARKETT RECOMMENDATION	Step, Ideo, Tango Classic, Tango Vintage, Tango Art, Tango, Salsa Art Vision, Salsa Premium, Rumba, Performance Fashion, Salsa, Salsa Art, Samba, Bolero	Fiesta 832, Navigator 1233, Pilot 1033, Cinema 832, Holiday 832, Universe 1433, Estetica 933, Gallery 1233, Elegance 1232, Dynasty 1233	Rio, Dolce Vita, Mondo, Creative, Pleasure, Vegas Home, Vegas Pop, Boho, Toscana, Savana Plus, Adria, Solid	Desso collections	Modena, Dragon, Sensa	Starfloor Click 30 & 30 Plus	New Age
Product type	Parquet	Laminate	Rugs	Textile tiles	Carpet rolls	LVT	LVT
Main advantages	100% real wood Extensive range of accessories: skirtings, moldings and pipe covers in different wood species to complete the final touch Very stable multi-layer construction Proteco lacquer – one of the strongest surface protections in wood industry Suitable for self-regulating under floor heating systems (max 25 °C) Easy installation and maintenance Wide range of colours and effects	Easy installation and replacement Easy maintenance Suitable for self-regulating under floor heating system High resistance to wear and scratch	Ultra soft touch Good underfoot comfort	Endless design options with different colours, patterns and shapes Fast installation and easy (partial) replacement Installation can be phased to keep your business open to guests Cost effective: tiles are delivered in boxes, reducing transportation costs and making them easy to store on-site Flexibility: individual tiles can be replaced quickly and easily in-house if soiled or damaged Less waste: waste is significantly reduced compared to broadloom carpet	Ultra soft touch Good underfoot comfort	Simple click installation Resistant to scuffs, scratches and stains Easy to clean and maintain	 Design opportunities Ease of installation and care Durability and ability to use in high traffic areas 100% moisture resistance Ability to install on top of floor heating




TARKETT RECOMMENDATION	Premium	Evolution	Absolut	Force	│ Veneto xf ^{2™} │ 2 mm
Product type	Residential vinyl	Residential vinyl	Residential vinyl	Heterogeneous vinyl	Linoleum
Main advantages	3D Effect Additional protective layer which keeps dirt away from lower layers of the product - easier cleaning & maintenance Tarkett mechanical embossing Deep graining makes it look natural, more than ever before Easy installation	Mat and shiny effect Tarkett PUR treatment - Extreme Protection 7 times more resistant to standard PUR treatment Easy to clean and install 15 years guarantee	Innovative effect: realistic texture with embossing in register Suitable for areas with the high usage frequencies Scratch, abrasion and scuff resistant The vinyl wear resistance is increased seven times due to its extreme surface protection	Tarkett PUR treatment - Extreme Protection Scratch, abrasion and scuff resistant Tarkett mechanical embossing Deep graining makes it look natural, more than ever before Easy to clean and install 15 years guarantee	Superior xf ^{2TM} protection for extreme mechanical and chemical toughness The classical marbled linoleum solution with soft or intense pattern variations for a timeless effect

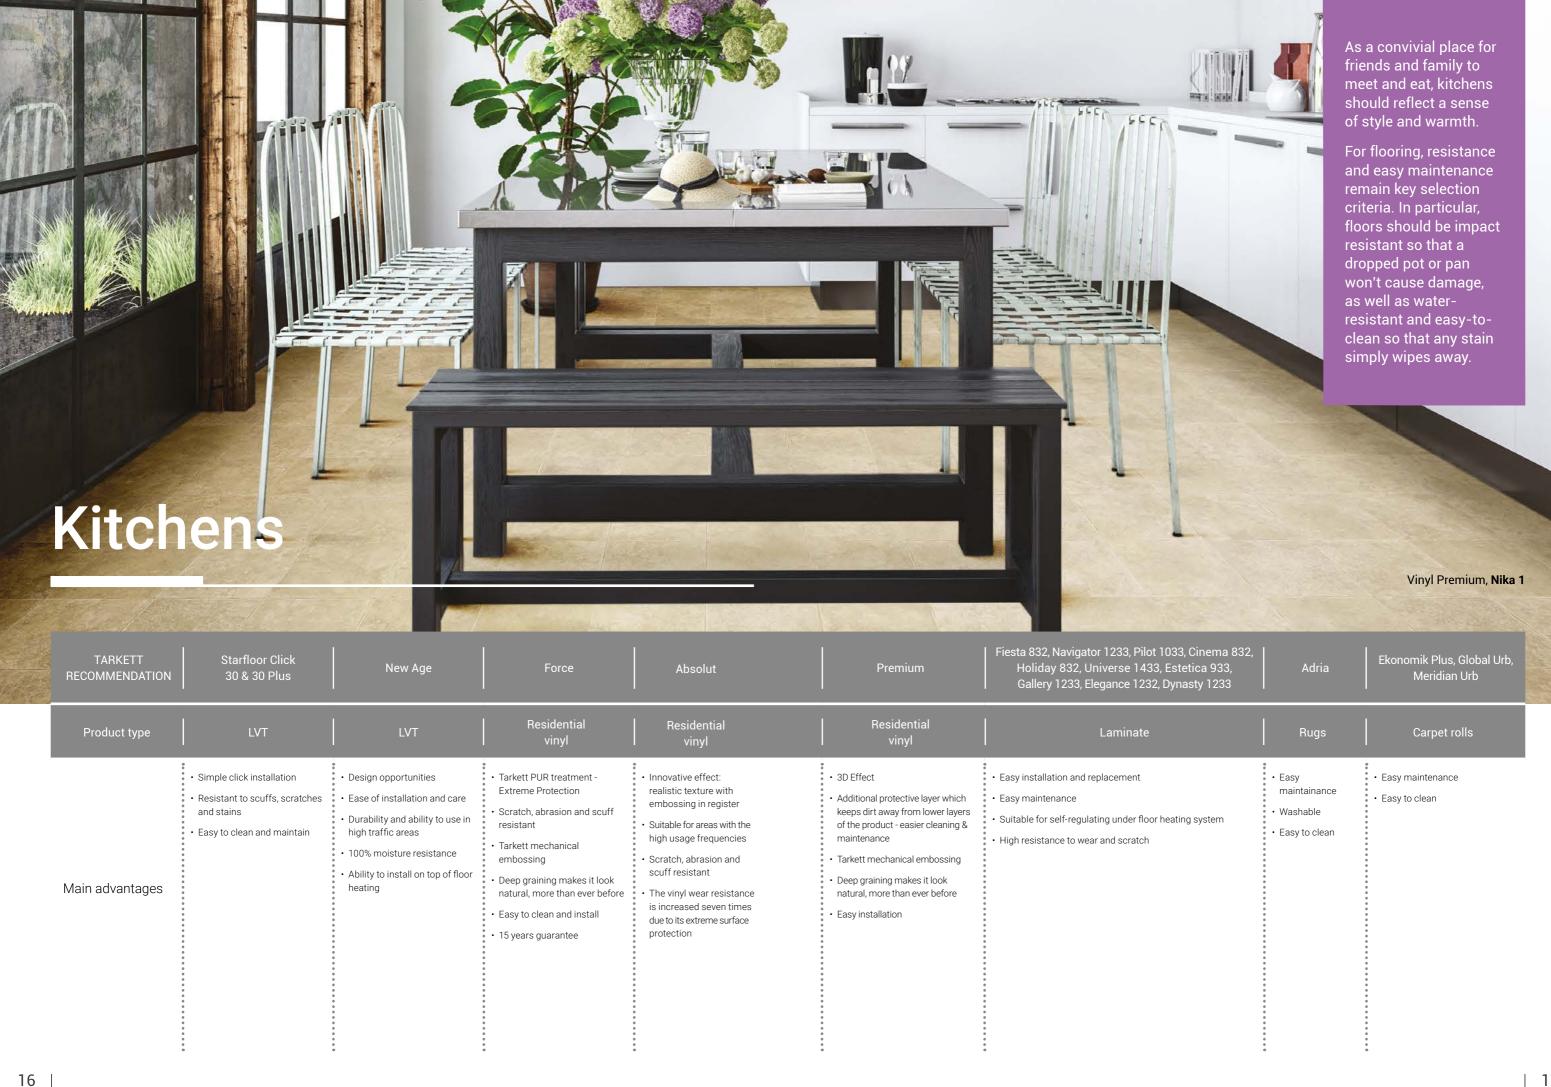

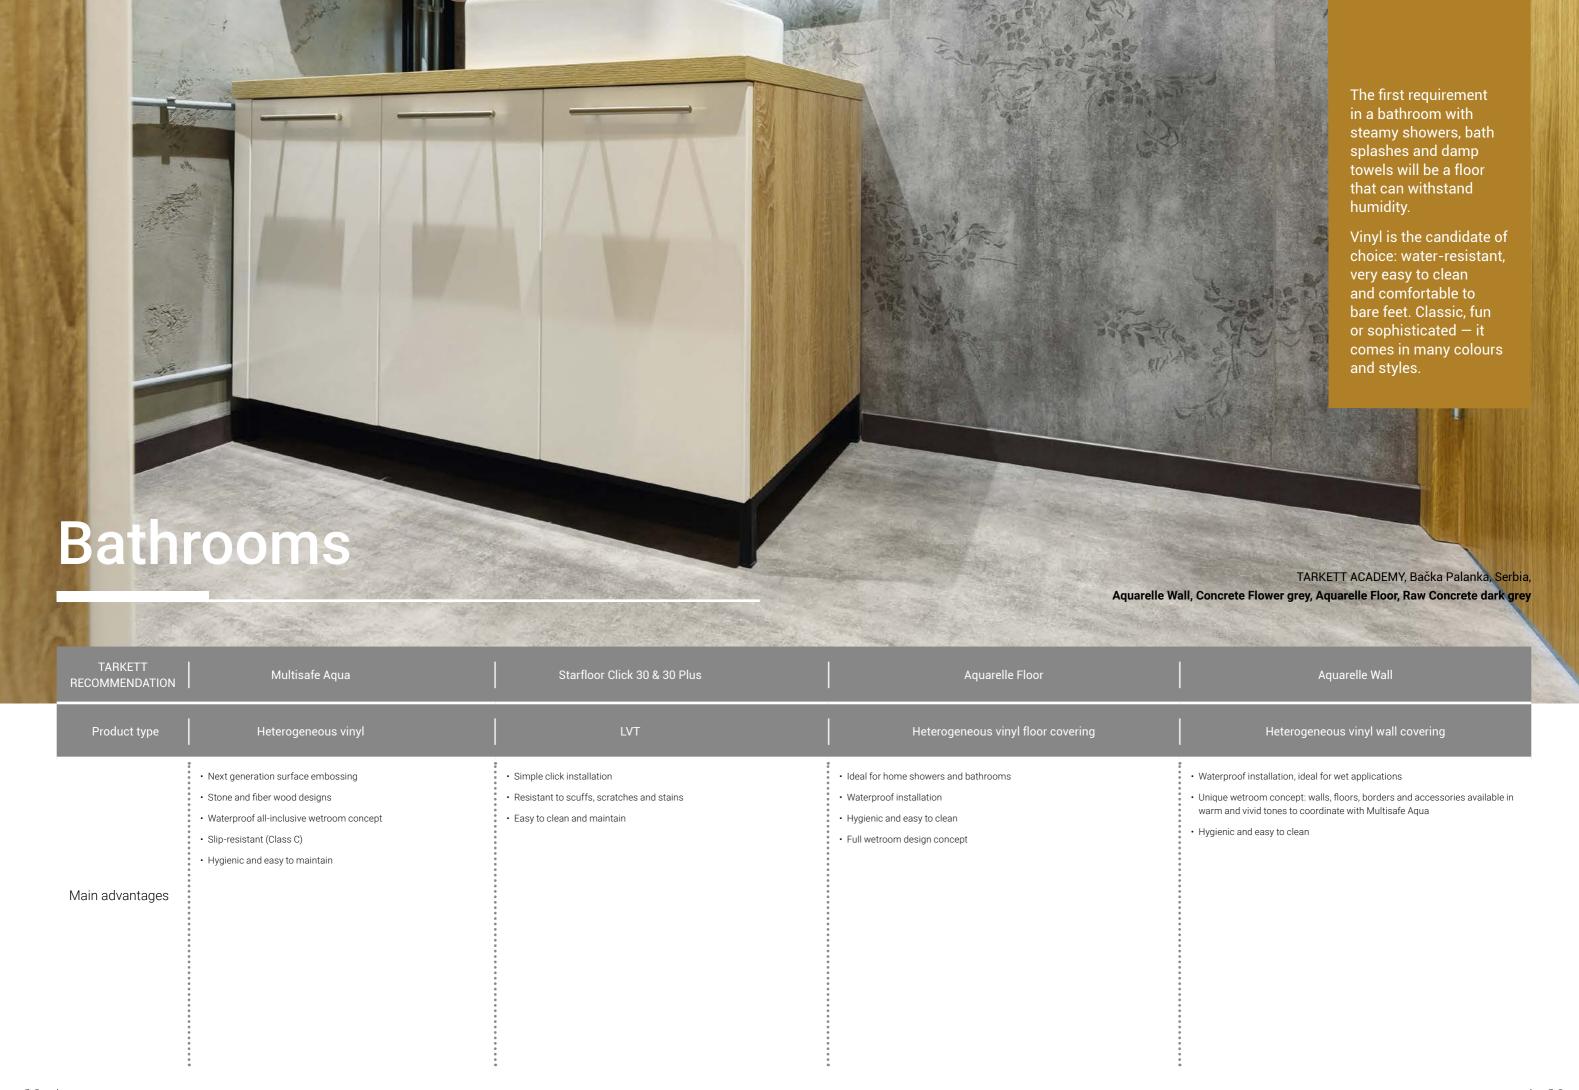

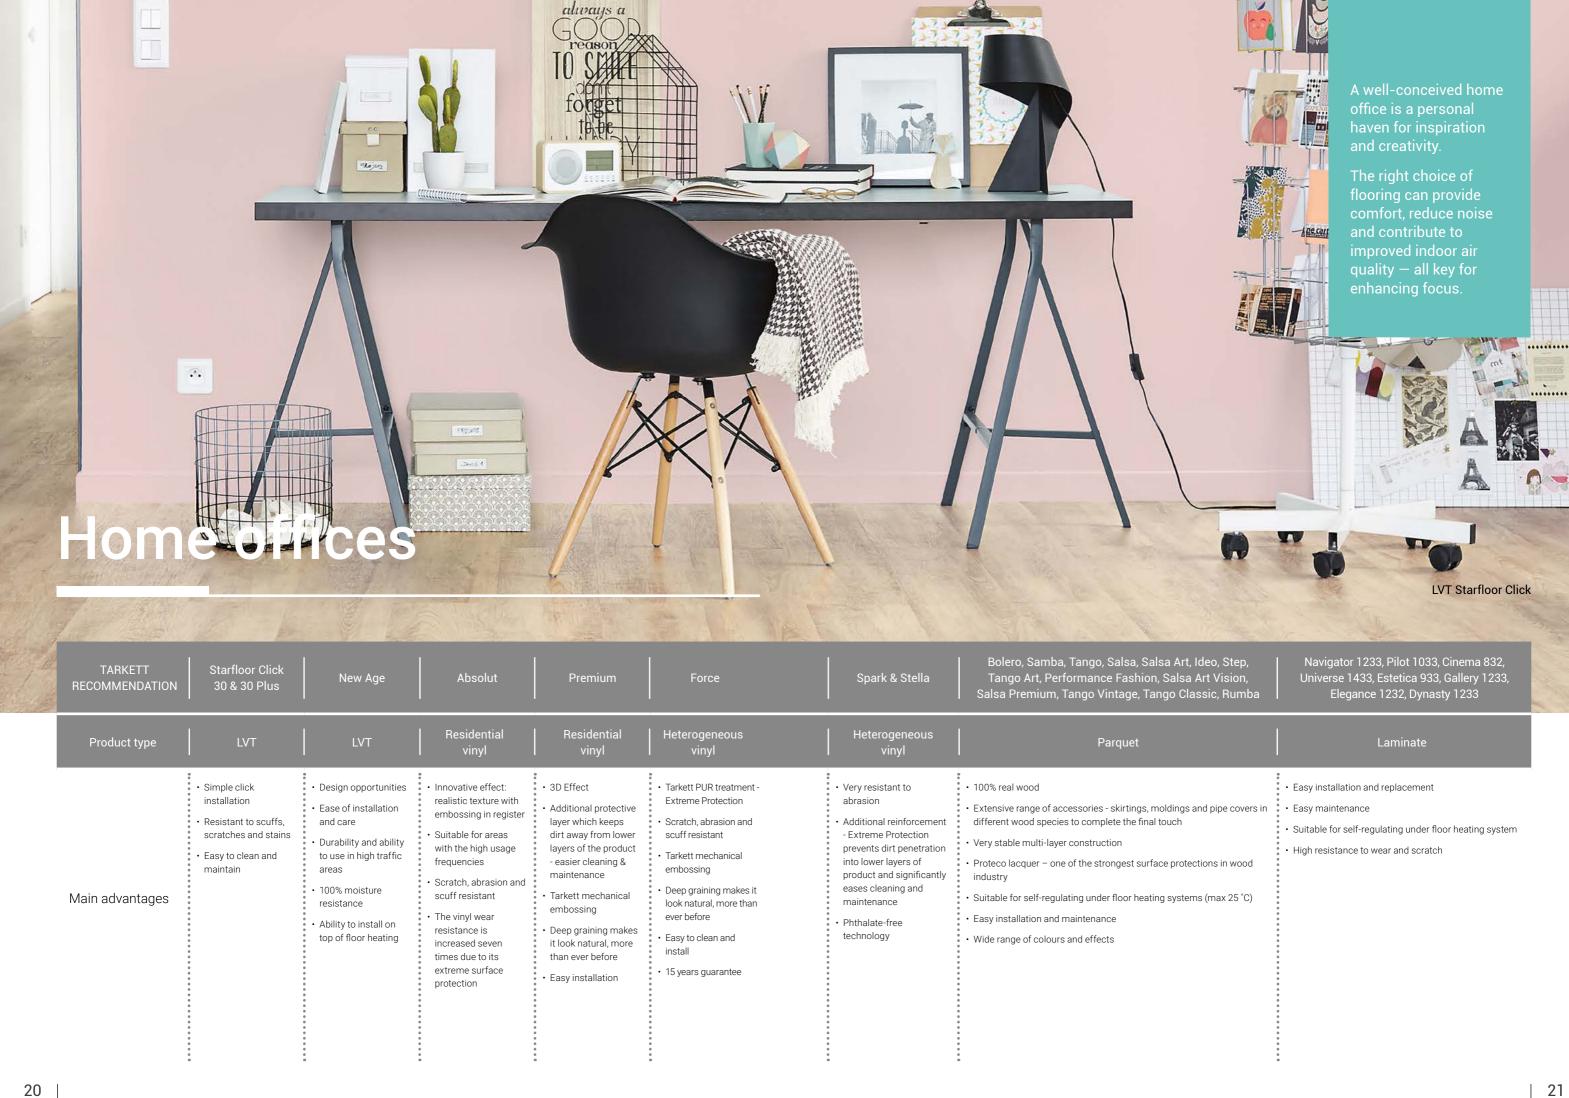

HILKL IV

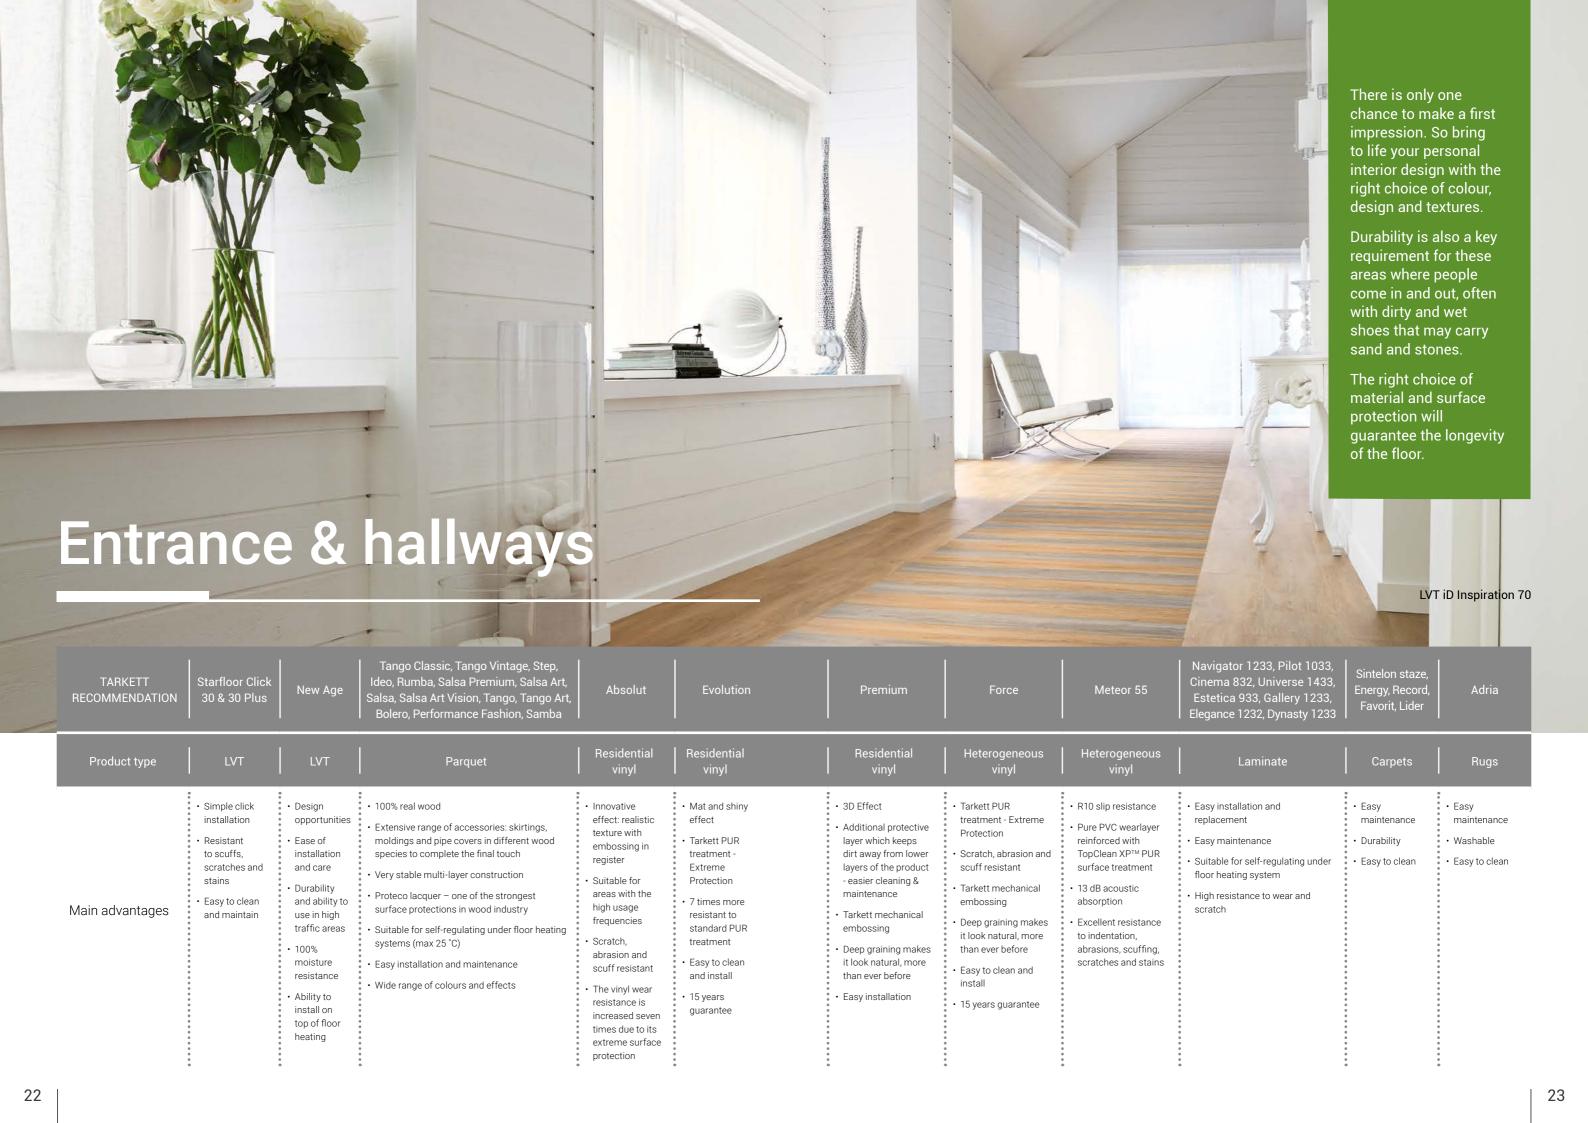



Technical data at a glance

		Starfloor Click 30 & 30 Plus	New Age	Premium	Legend	Evolution	Absolut	Exclusive 300	Force	Meteor 55	Spark
		LVT	LVT	Residential vinyl	Residential vinyl	Residential vinyl	Residential vinyl	Residential vinyl	Heterogeneous vinyl	Heterogeneous vinyl	Heterogeneous vinyl
Design		Available in 30 designs & colours	Available in 20 designs & colours	Available in 21 designs & colours	Available in 6 designs & colours	Available in 18 designs & colours	Available in 24 designs & colours	Available in 9 designs & colours	Available in 29 designs & colours	Available in 26 designs & colours	3 designs
Acoustic comfort	Impact sound reduction EN ISO 717/2	3 dB	6 dB	16 dB	17 dB	18 dB	16 dB	20 dB	10 dB	13 dB	
Wear layer thickness	ISO 24340	0.30 mm	0.40 mm	0.30 mm	0.50 mm	0.20 mm	0.45 mm	0.25 mm	0.60 mm	0.55 mm	0.70 mm
	Classification ISO 10874 (EN 685) domestic commercial	23 31	23 32	23 31	23 32	22	23 31	23 31	23 33	34	34
Durability & Resistance	Indentation ISO 24343-1 (EN 433)	0.08 mm	0.10 mm	0.35 mm	0.35 mm	0.35 mm	0.35 mm	0.35 mm	0.20 mm	0.05 mm	≤ 0.1 mm
	Reaction to fire EN 13501-1	Bfl-s1 loose laid on concrete and on wood	Bfl-s1 loose laid on concrete and on wood	Cfl-s1	Cfl-s1		Cfl-s1		Bfl-s1	Bfl-s1 glued on derivate wood panel	Bfl-s1
Easy and low cost	Surface treatment	PUR Extreme®	Extreme Protection	Extreme Protection	Extreme Protection	Extreme Protection	Extreme Protection	Extreme Protection	Extreme Protection	TopClean XP™	Extreme Protection
maintenance	No wax, no polish for life	+	+	+	+	+	+	+	+	+	•
Slip resistance	DIN51130	R9 / R10 depending on embossing		R10	R9	R9	R10	R10	R9/R10	R10	R10
	ISO 16000 TVOC ≤ 1000 μg/m³	≤ 100 µg/m³	-	-	-	-	-	≤ 100 µg/m³	-	≤ 100 µg/m³	-
Indoor air quality &	Phthalate-free technology	+	+	+	+	+	+	+	+	+	+
Environment	% recyclable	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
	% recycled content	-	-	-	-	-	-	-	-	17%	-
Installation system		Click	Glue down	Glue down rolls	Glue down rolls	Glue down rolls	Glue down rolls	Glue down rolls	Glue down rolls	Glue down rolls	Glue down rolls

		Stella	Veneto XF ^{2™} 2 mm	Multisafe Aqua	Aquarelle Floor	Aquarelle Wall
		Heterogeneous vinyl	Linoleum	Heterogeneous vinyl	Heterogeneous vinyl floor covering	Heterogeneous vinyl wall covering
Design		1 design in 10 colours	Available in 19 designs & colours	Available in 12 designs & colours	Available in 32 designs & colours	Available in 35 designs & colours
Acoustic comfort	Impact sound reduction EN ISO 717/2	-	5 dB		-	-
Wear layer thickness	ISO 24340	0.70 mm	-	0.55 mm	0.35 mm	0.12 mm
	Classification ISO 10874 (EN 685) domestic commercial	34	23 32	33	31	-
Durability & Resistance	Indentation ISO 24343-1 (EN 433)	≤ 0.1 mm	0.07 mm	≤ 0.10 mm	0.10 mm	-
	Reaction to fire EN 13501-1	Bfl-s1	Cfl-s1	Bfl-s1 glued over any A2fl or A1fl substrate (on cement); Cfl-s1 glued over any derivate wood substrate	Bfl-s1 glued on any derivate wood panel	C-s2, d0 on gypsum plasterboard A1 or A2-s1, d0 substrate
Easy and low cost	Surface treatment	Extreme Protection	XF ^{2TM}	TopClean XP™	TopClean XP™	TopClean XP™
maintenance	No wax, no polish for life	+	+	+	+	+
Slip resistance	DIN51130	R10	R9	-	R10	-
	ISO 16000 TVOC ≤ 1000 μg/m³	-	≤ 100 µg/m³	≤ 100 µg/m³	< 10 μg/m³	≤ 10 µg/m³
Indoor air quality &	Phthalate-free technology	+	+	+	+	+
Environment	% recyclable	100%	100%	100%	100%	100%
	% recycled content	-	36%	•	-	-
Installation system		Glue down rolls	Glue down rolls	Glue down	Glue down rolls	Glue down

					LAMINATE				
		NAVIGATOR 1233	PILOT 1033	UNIVERSE 1433	GALLERY 1233	DYNASTY 1233	ESTETICA 933	CINEMA 832	HOLIDAY 832
Dimensions (mm)	EN 13329	1292*194*12	1292*159*10	1292*194*14	1292*116*12	1292*159*12	1292*194*9	1292*194*8	1292*194*8
Supporting foundation (HDF)	EN 316	(density 875 kg/m³; +/- 20 kg/m³)							
Locking system	TC-lock	TC-lock (2G)							
Protection of edges	According TC 5536-001-59066253-2014	Tech-3S AquaStop	Tech-3S AquaStop	Tech-3S AquaStop	Tech-3S AquaStop	Tech-3S AquaSto	Tech-3S AquaStop	Tech-3S AquaStop	Tech-3S AquaStop
Forecasted service life		not less than 25 years	not less 25 years	not less 25 years	not less 25 years				
Class of usage	EN 13329	33	33	33	33	33	33	32	32
Resistance to abrasion	EN 13329 application E	AC5							
Impact resistance	EN 13329	IC3							
Resistance to cigarettes	EN 438-2	≥ 4	≥4	≥4	≥ 4	≥4	≥4	≥ 4	≥4
Thickness	EN 13329	12 mm; +/- 0.5 mm	10 mm; +/- 0.5 mm	14 mm; +/- 0.5 mm	12 mm; +/- 0.5 mm	12 mm; +/- 0.5 mm	9 mm; +/- 0.5 mm	8 mm; +/- 0.5 mm	8 mm; +/- 0.5 mm
Length	EN 13329	1292 mm; +/- 0.5 mm							
Width	EN 13329	194 mm; +/- 0.1 mm	159 mm; +/- 0.1 mm	194 mm; +/- 0.1 mm	116 mm; +/- 0.1 mm	159 mm; +/- 0.1 mm	194 mm; +/- 0.1 mm	194 mm; +/- 0.1 mm	194 mm; +/- 0.1 mm
Straightness of edges of upper layer	EN 13329	≤ 0.3 mm/m							
Clear gaps between panels	EN 13329	average ≤ 0.15 mm; maximal ≤ 0.20 mm							
Difference in height between panels	EN 13329	average ≤ 0.10 mm; maximal ≤ 0.15 mm							
Fire safety	C-RU.ПБ.25.В.04266	KM 5							
Class-formaldehyde	EN 717-1	E1							
Thermal resistance (m ² K)/W	EN12667:2001	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11
		LOGISTICS							
boards in pack		5 boards	6 boards	5 boards	5 boards	5 boards	7 boards	8 boards	8 boards
m² in pack		1.253 m ²	1.232 m ²	1.253 m²	0.749 m ²	1.027 m²	1.754 m²	2.005 m ²	2.005 m²
packs in pallet/m² in pallet		56 packs/70.168 m ²	75 packs/92.400 m ²	48 packs/60.144 m ²	84 packs/62.916 m ²	70 packs/71.89 m ²	56 packs/98.224 m²	56 packs/112.28 m ²	56 packs/112.28 m ²

Technical data at a glance

	LAMINAT	re	
		FIESTA 832	ELEGANCE 1232
Dimensions (mm)	EN 13329	1292*194*8	1292*194*12
Supporting foundation (HDF)	EN 316	(density 850-890 kg/m³)	(density 850-890 kg/m³)
Locking system	TC-lock	TC-lock (2G)	TC-lock (2G)
Protection of edges	According TC 5536-001-59066253-2014	Tech-3S AquaStop	Tech-3S AquaStop
Forecasted service life		not less than 25 years	not less than 25 years
Class of usage	EN 13329	32	32
Resistance to abrasion	EN 13329 application E	AC4	AC4
Impact resistance	EN 13329	IC2	IC2
Resistance to cigarettes	EN 438-2	≥5	≥ 5
Thickness	EN 13329	8 mm; +/- 0.5 mm	12 mm; +/- 0.5 mm
Length	EN 13329	1292 mm; +/- 0.5 mm	1292 mm; +/- 0.5 mm
Width	EN 13329	194 mm; +/- 0.5 mm	194 mm; +/- 0.5 mm
Straightness of edges of upper layer	EN 13329	≤ 0.3 mm/m	≤ 0.3 mm/m
Clear gaps between panels	EN 13329	average ≤ 0.15 mm; maximal ≤ 0.20 mm	average ≤ 0.15 mm; maximal ≤ 0.20 mm
Difference in height between panels	EN 13329	average ≤ 0.10 mm; maximal ≤ 0.15 mm	average ≤ 0.10 mm; maximal ≤ 0.15 mm
Fire safety	C-RU.ПБ.25.B.04266	KM5	KM5
Class-formaldehyde	EN 717-1	E1	E1
Thermal resistance (m ² K)/W	EN12667:2001	0.11	0.11
	LOGISTICS		
boards in pack		8 boards	6 boards
m² in pack		2.005 m ²	1.054 m ²
packs in pallet/m² in pallet		56 packs/112.28 m ²	65 packs/68.51 m ²

		PARQUET													
		Performance Fashion	Tango Vintage	Tango Art	Tango	Tango Classic	Step	Rumba	Ideo	Salsa Art Vision	Salsa Art	Salsa Premium	Salsa	Bolero	Samba
Dimensions	EN 13329	2215*164*14	2215*164*14	2215*164*14	2215*164*14	1200*164*14	1000*140*14 1000*164*14 1200*140*14 1200*164*14	1200*120*14	2283*194*14	2283*194*14	2283*194*14	2283*194*14	2283*194*14	1123*194*14	1123*194*14
Locking system		T-lock	T-lock	T-lock	T-lock	T-lock	T-lock	T-lock	T-lock	T-lock	T-lock	T-lock	T-lock	T-lock	T-lock
Thickness	EN 13329	14 mm	14 mm	14 mm	14 mm	14 mm	14 mm	14 mm	14 mm	14 mm	14 mm	14 mm	14 mm	14 mm	14 mm
Length	EN 13329	2215 mm	2215 mm	2215 mm	2215 mm	1200 mm	1000 / 1200 mm	1200 mm	2283 mm	2283 mm	2283 mm	2283 mm	2283 mm	1123 mm	1123 mm
Width	EN 13329	164 mm	164 mm	164 mm	164 mm	164 mm	140 / 164 mm	120 mm	194 mm	194 mm	194 mm	194 mm	194 mm	194 mm	194 mm
								LOGI	STICS						
boards in pack		6	6	6	6	6	6	6	6	6	6	6	6	6	6
m² in pack		2.18	2.18	2.18	2.18	1.182	0.840 / 0.984 / 1.008 / 1.182	0.864	2.658	2.658	2.658	2.658	2.658	1.307	1.307
m² in pallet		130.8	130.8	130.8	130.8	70.92	70.92 (164 x 1200) 70.56 (140 x 1200) 59.04 (164 x 1000) 50.40 (140 x 1000)	68.8	132.9	132.9	132.9	132.9	132.9	47.05	65.35

Technical data at a glance

				CARPET ROLLS								
TECHNICAL CHARACTERISTICS	NORM	MODENA	DRAGON	SENSA	EKONOMIK PLUS	GLOBAL URB	MERIDIAN URB	ENERGY	RECORD	FAVORIT	LIDER	SINTELON STAZE
Pile Content	ISO 1833	100% PP	100% PP	100% PP	100% PP	100% PP	100% PP	100% PP	100% PP	100% PP	100% PP	100% PP
Backing	ISO 1833	TERMO	TERMO	TERMO	RUBBER	RUBBER	RUBBER	RUBBER	RUBBER	RUBBER	RUBBER	RUBBER
Total Weight	ISO 8543	2150 g/m²	1650 g/m²	2000 g/m ²	860 g/m ²	1200 g/m²	1310 g/m²	1550 g/m²	1750 g/m²	1450 / 1750 g/m²	1450 / 1750 g/m²	1750 g/m²
Effective Pile Thickness	ISO 1766	13 mm	7.7 mm	10 mm	-	-	-	-	-	-	-	-
Total Thickness	ISO 1765	15 mm	10.5 mm	12 mm	3.5 mm	5 mm	5 mm	7.5 mm	8.5 mm	7.5 / 8.5 mm	7.5 / 8.5 mm	8.5 mm
Luxury Class	EN 1307	LC4	LC2	LC3	-	-	-	-	-	-	-	-

				RUGS										
TECHNICAL CHARACTERISTICS	RIO	DOLCE VITA	MONDO	CREATIVE	PLEASURE	VEGAS HOME	VEGAS POP	воно	TOSCANA	SAVANA PLUS	ADRIA	SOLID	PLAY	СІТУ
Pile Fibre	100% PP	100% PES	100% PP	100% PES	40% PES 60 % PP	100% PP	100% PP	80% PP 20% PES	100% PP	100% PP	100% PP	100% PP	100% PP	100% PP
Effective Pile Thickness	30 mm	25 mm	10 mm	11 mm	50 mm	12 mm	14 mm	11 mm	17 mm	30 mm	0 mm	8 mm	8 mm	8 mm
Total Weight	2070 g/m ²	2705 g/m²	2280 g/m ²	2750 g/m²	3155 g/m²	2780 g/m²	2590 g/m²	3210 g/m ²	3200 g/m ²	2170 g/m²	1250 g/m²	1955 g/m²	2125 g/m²	2125 g/m²


Our references




APARTMENTS VIP CASA, Zlatibor, Serbia, Parquet, Step Oak Baron, Tango Oak Java



SUN RESORT, Herceg Novi, Montenegro, LVT, New Age, Ambient & Mistero

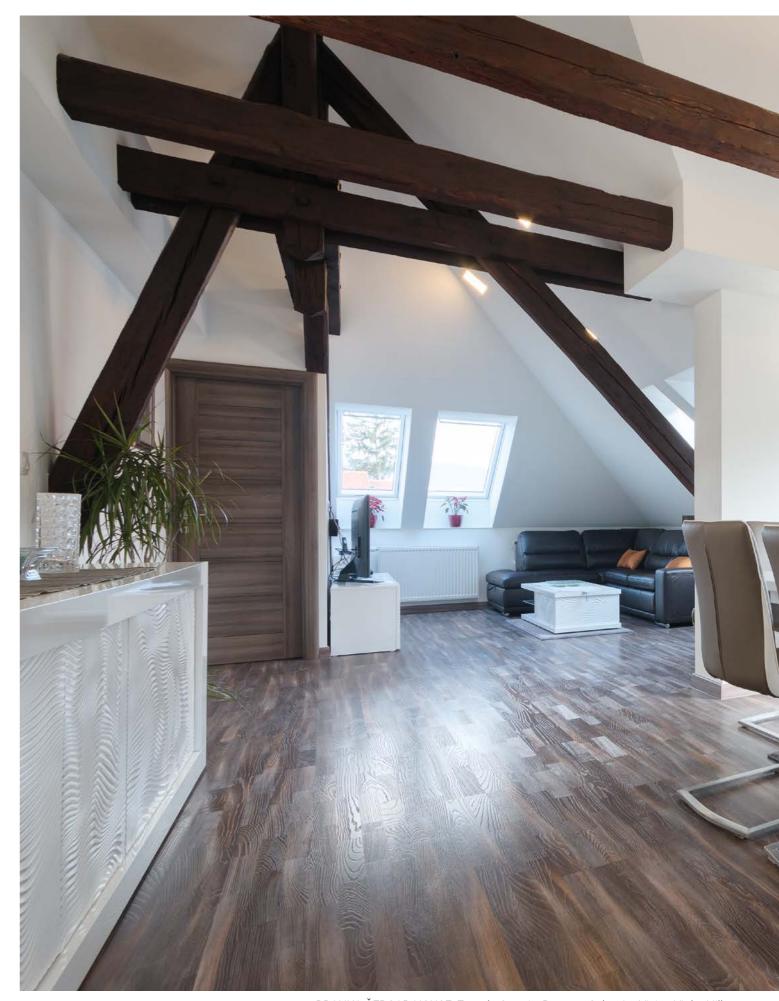

BRANKA ČERGAR HOUSE, Zagreb, Croatia, Parquet, Salsa Art Vision Violet Hill

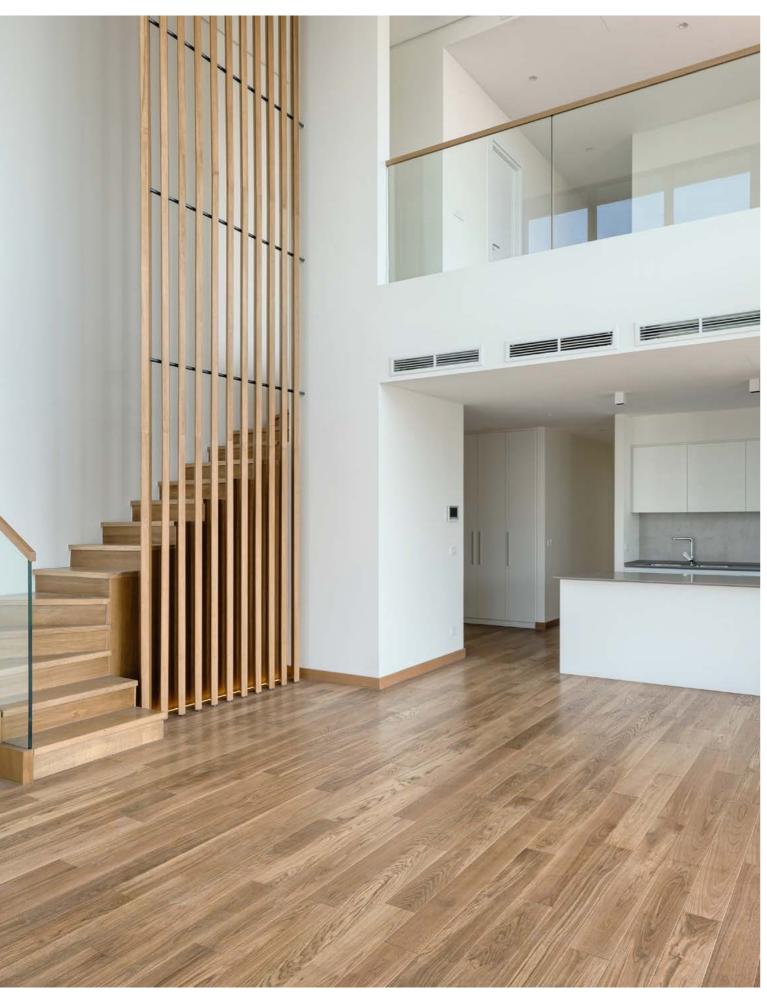

RESIDENTIAL BUILDING BELGRADE WATERFRONT, Belgrade, Serbia, Parquet, Step Oak Baron



RESIDENTIAL BUILDING SAVADA, Belgrade, Serbia, Parquet, Step, Oak Baron



RESIDENTIAL BUILDING FIDIJA, Petrovac, Montenegro, Parquet, Rumba

SERBIA: Tarkett SEE, Industrijska zona 8, 21400 Bačka Palanka, Phone: +381 21 7557 649, Fax: +381 21 750 133, www.tarkett.rs ROMANIA: Tarkett SEE, Willbrook Platinum Business & Convention Center, 172-176 Bucharest - Ploiest Road, Building "A", 3rd floor, 013697 Bucharest, Sector 1 Romania, Phone: +40 21 224 0124, www.tarkett.ro BULGARIA: 23A Dragan Tsankov Blvd., office building Tetrix, floor 1, office 7, Sofia, Phone: +359 2 986 7988, www.tarkett.bg CROATIA: Tarkett SEE, Buzinski prilaz 10, 10 000 Zagreb, Phone: +385 98 385 194, www.tarkett.br ROSNIA AND HERZEGOVINA: Tarkett SEE, Jovana Dužića 74, 78000 Rapia Luka www.tarkett.hr **BOSNIA AND HERZEGOVINA**: Tarkett SEE, Jovana Dučića 74, 78000 Banja Luka, Phone: +387 65 770 565, +387 65 402 221, www.tarkett.ba

