




TABLE OF CONTENTS

5	INTRODUCTION
6	MAIN REQUIREMENTS
8	A SOLUTION FOR EVERY SPACE
0	OPEN SPACES
2	PRIVATE OFFICES
4	CORRIDORS
6	RECEPTIONS & COMMON AREAS
8	STAIRCASES
0	STORAGE AREAS
2	RESTROOMS & TOILETS
4	SERVER ROOMS
6	FITNESS AREAS
8	CANTEENS & CAFETERIAS
0	CONFERENCE & MEETING ROOMS
)	TECHNICAL DATA AT A GLANCE

OUR REFERENCES

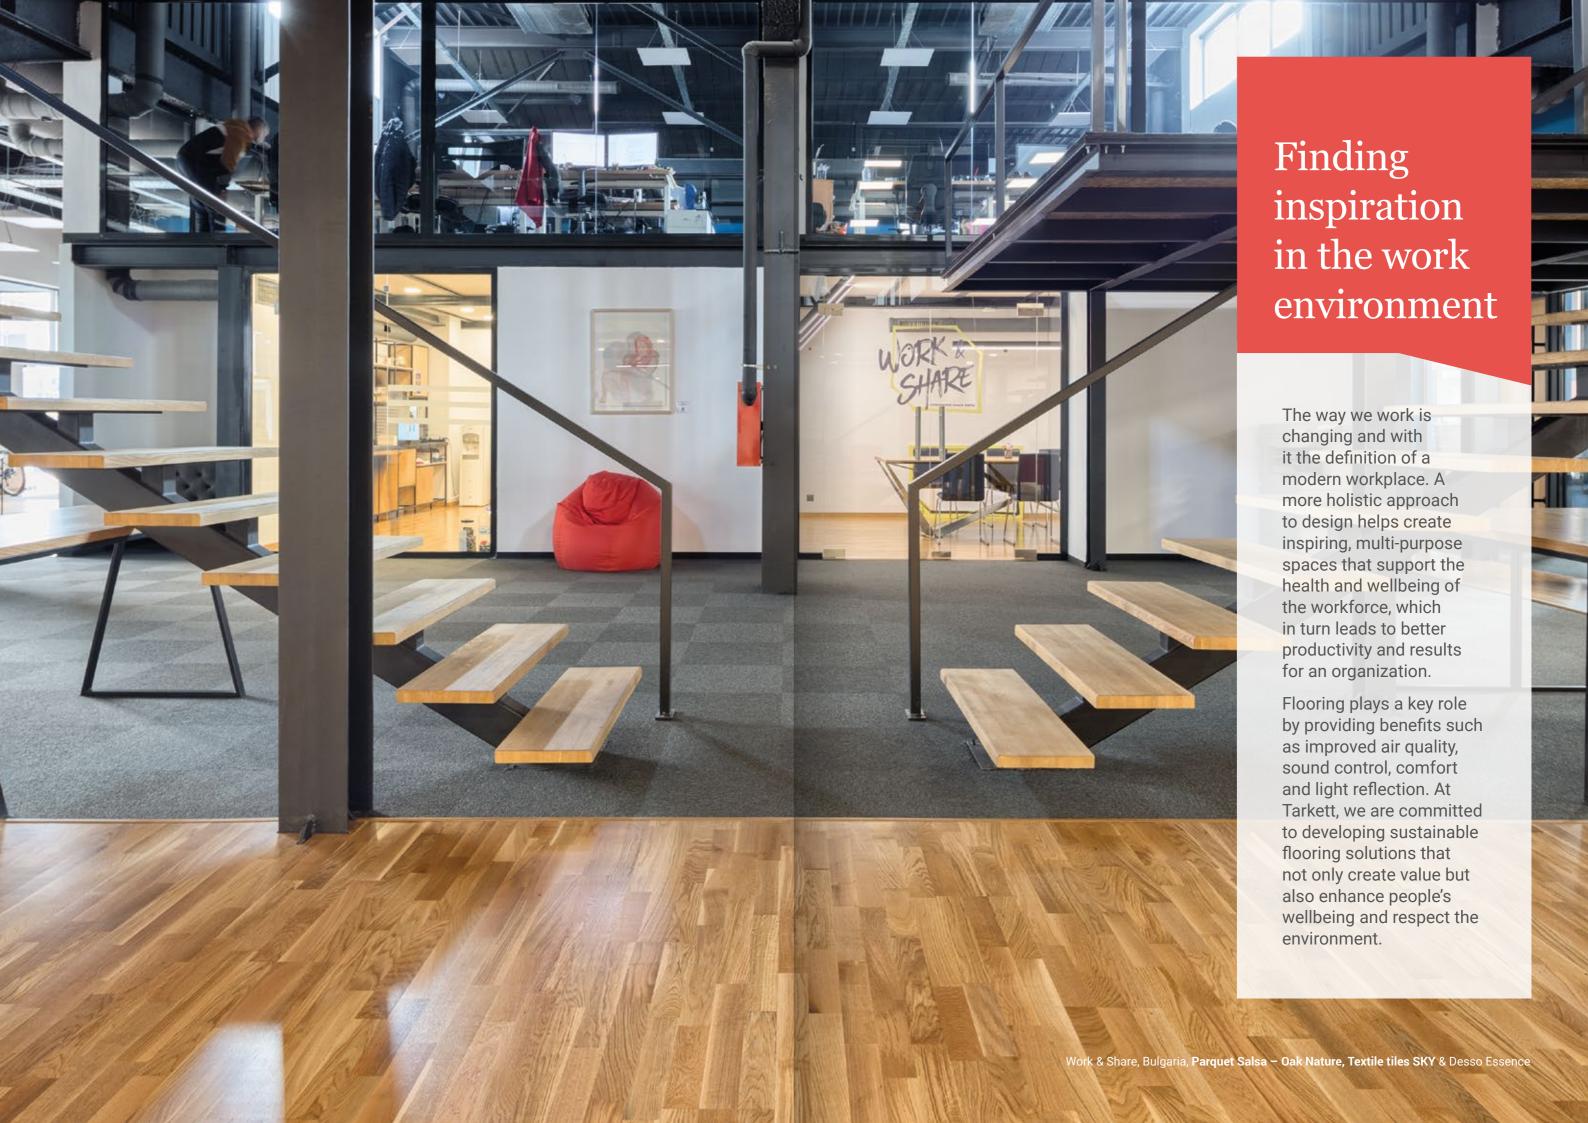

Main requirements



INDOR AIR QUALITY

Today most people spend around 90% of their time indoors, so workplace interiors that provide health and well-being are more important than ever.

- No harmful components
- The lowest VOC emissions
- No toxic pollutants



HYGIENE, EASY CLEANING & LOW-COST MAINTENANCE

CONTEXT: 80% of dirt comes from outside and 90% of micro-organisms are found in visible dirt*. For good hygiene, it's important to easily clean dirt and floor soiling. Not only that, but flooring maintenance represents 50-70% of a building's total maintenance budget. Facility managers require a solution that reduces their long-term costs.

SOLUTION: Tarkett strives to minimize your maintenance costs and assist daily cleaning:

- Reduce levels of dirt and moisture carried into the building to a minimum, with 3-step entrance mats
- Choose low-maintenance products that require no stripping, wax or polish, and assist cleaning in sensitive areas with coving

*source: WHO



DURABILITY & RESISTANCE

CONTEXT: Today, most people are spending more time in their offices than in their own houses. Offices run minimum 5 days per 8 hours weekly, and they have to stand up to rough treatment. Therefore it is important to select durable materials that will resist heavy traffic and do not require heavy maintenance.

SOLUTION: Minimize daily attacks and stresses by using Tarkett's highly resistant flooring, especially to abrasion and indentation



DESIGN CONCEPT

(Easy navigation and zoning)

CONTEXT: Different textures, designs and colours can be used to create walking paths and distinct zones, establishing places to work, to collaborate, to quietly concentrate, or to build a sense of community.

SOLUTION: Our broad portfolio of flooring solutions — including carpet, modular vinyl, wood, laminate and linoleum — can provide limitless design possibilities and opportunities to express a brand identity, as well as offer inspiring transitions from one area to another.

A WELL-DESIGNED ENTRANCE FOR LIGHTER MAINTENANCE

A well-designed entrance mat is key to reducing cleaning costs and increasing flooring durability.



- 1 Outside the building to get rid of most of the dirt on rough cleaning mats.
- 2 At the entrance to dry shoes with absorbing mats.
- **3** Inside the reception area, textile mats to absorb any remaining moisture from footwear.



SUSTAINABILITY COMMITMENT

CONTEXT: Sustainable building design is key to durable constructions that have minimal environmental impact, without compromising on quality of life. All building materials, including flooring, must meet specific norms to earn certification from one of the exacting ecobuilding systems around the world (LEED (US), BREEAM (UK), HQE (France), etc.).

SOLUTION: Tarkett is a leader in environmentally responsible manufacturing and sustainable product development with our 4 key pillars:

- Use better materials: natural, renewable and recycled resources, choose Cradle to Cradle products
- Use fewer resources: limit water, energy consumption and waste generation
- Create people-friendly spaces: lowest VOC emissions and phthalate-free technology
- Recycle program contributes to environmental protection



ACOUSTIC COMFORT

CONTEXT: Noise levels within a room can be a real issue, and need to be controlled for favourable work conditions and a positive brand image. Flooring is one of many construction materials that can reduce the amount of sound in a given space.

SOLUTION: To reduce noise and in accordance with building constraints, Tarkett offers a range of flooring solutions:

- to limit in-room noise linked to footsteps and furniture movements
- that ranges from class A to C




SLIP RESISTANCE

CONTEXT: Slipping can cause serious injuries. People are most exposed to falls in wet areas.


SOLUTION: Tarkett has a range of solutions that reduce the risk of slipping:

- Specific flooring for use in food and non-food areas
- Safety flooring that include many decors and colours to match with different office concepts



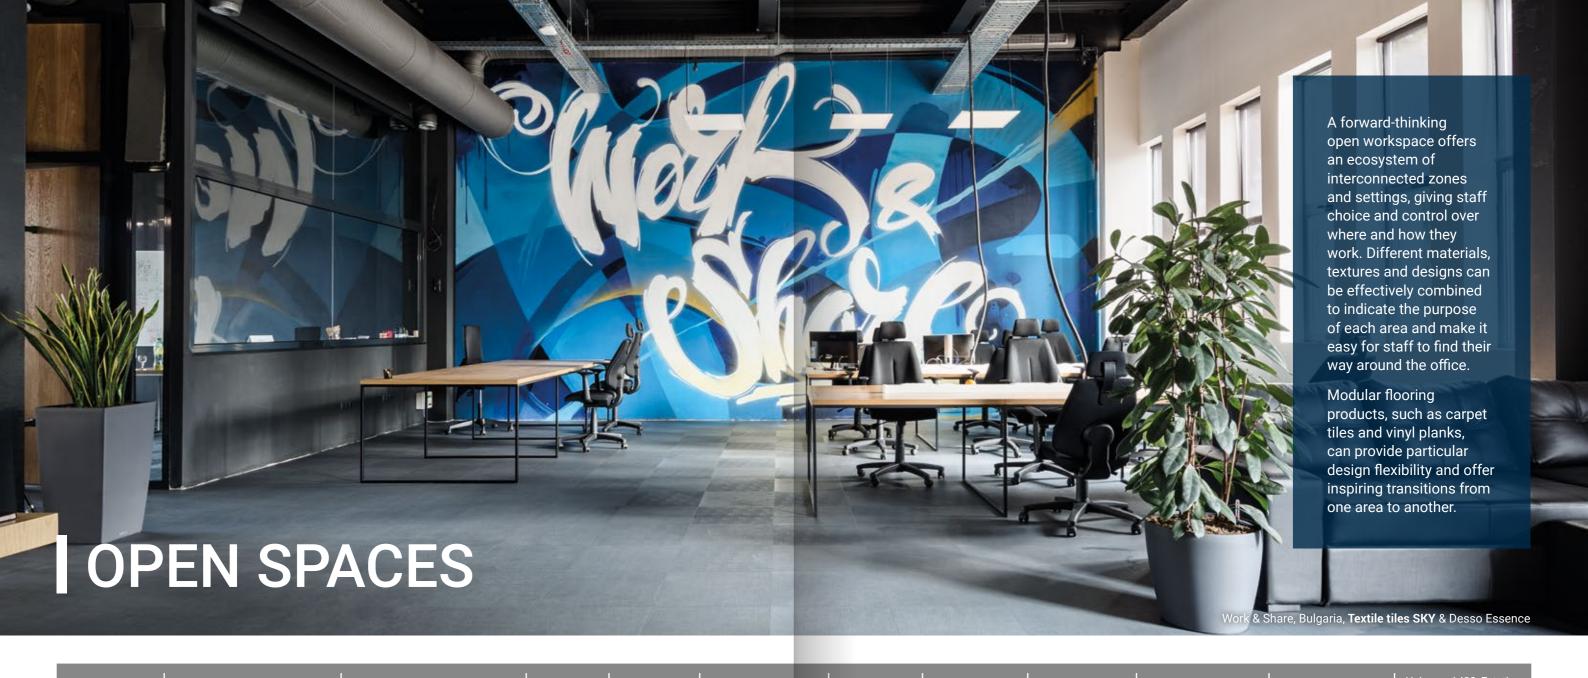

TARKETT RECOMMENDATION	Desso collections	Tarkett tiles collections	iD Click Ultimate	iD Square & iD Inspiration Loose-lay	iD Inspiration Click & Click Plus		iD Inspiration 70/55 & 70/55 Plus	iQ Collections (Optima, Megalit, Natural, Granit, Eminent)	Acczent Excellence 80 & Acczent Platinium 100	Stella & Spark	Collections 2.5 mm: Trentino XF ^{2TM} , Veneto XF ^{2TM} , Style Elle XF ^{2TM} , Style Emme XF ^{2TM}	Universe 1433, Estetica 933, Dynasty 1233, Gallery 1233, Navigator 1233, Pilot 1033
Product type	Textile tiles	Textile tiles	Rigid LVT	LVT	LVT		LVT	Homogeneous vinyl	Heterogeneous compact vinyl	Heterogeneous compact vinyl	Linoleum	Laminate
Main advantages	Endless design options with different colours, patterns and shapes Fast installation and easy (partial) replacement Installation can be phased to keep your business open to guests Cost effective: tiles are delivered in boxes, reducing transportation costs and making them easy to store on-site Flexibility: individual tiles can be replaced quickly and easily in-house if soiled or damaged Less waste: waste is significantly reduced compared to broadloom carpet	Plenty of different colours and patterns Fast installation and easy (partial) replacement Installation can be phased to keep your business open to guests Cost effective: tiles are delivered in boxes, reducing transportation costs and making them easy to store on-site Flexibility: individual tiles can be replaced quickly and easily in-house if soiled or damaged Less waste: waste is significantly reduced compared to broadloom carpet	High traffic & static indentation resistance Easy to clean Click system, easy to install and remove Good acoustic performance	Loose-lay vinyl tiles No permanent adhesive needed; fast and easy installation Excellent resistance to scuffing, soiling and staining Excellent acoustic efficiency Superior indentation resistance	Exclusive wood, stone and metal designs Fold-down vertical click installation Resistant to scuffs, scratches and stains Easy to clean and maintain	0 0 0 0 0 0 0	Boundless formats and colours Ideal for high traffic areas Highly resistant to scuffs, scratches and stains Easy to clean and maintain	Easy maintenance Extreme durability and outstanding flexibility iQ unique surface restoration system Lowest life cycle cost on the market	Heterogeneous flooring resistant to abrasion and furniture wheels Very wide range of colours and designs High indentation resistance because of compact backing TopClean XP™ reinforced surface treatment No wax, no polish for life Phthalate-free technology	Very resistant to abrasion, material made for commercial spaces Additional reinforcement Extreme Protection prevents dirt penetration into lower layers of product and significantly eases cleaning and maintenance Phthalate-free technology	2.5 mm thick Timeless marbled patterns in 60 colours Easy maintenance: no wax or polish for life Natural and sustainable Special possibility Bfl-s1	Easy installation and replacement Easy maintenance Suitable for self-regulating under floor heating system High resistance to wear and scratch

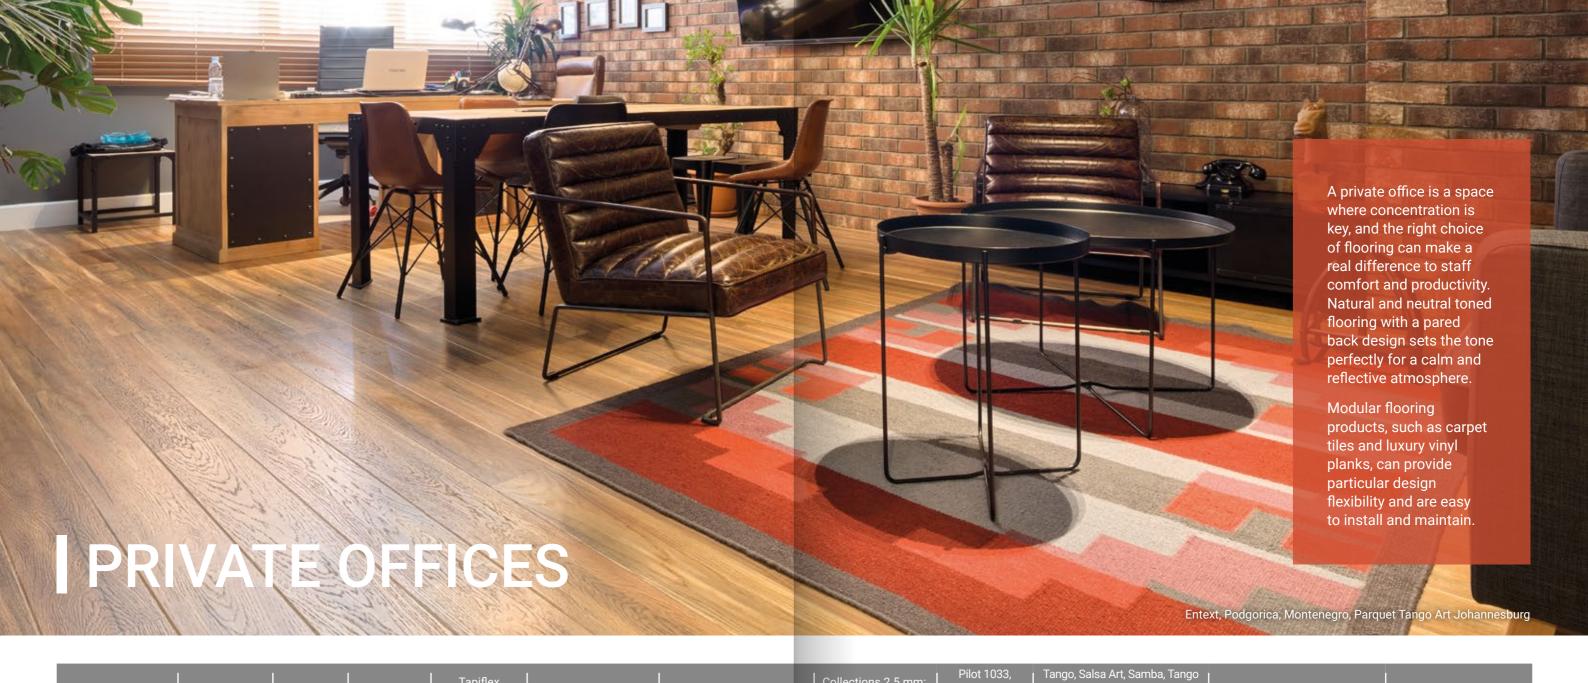

TARKETT RECOMMENDATIO	iD Square & iD Inspiration Loose-lay	iD Inspiration 70/55 & 70/55 Plus	iD inspiration Click & Click Plus	Excellence 80 & Tapiflex Platinium 100	Acczent Excellence 80 & Acczent Platinium 100	Force	Vene XF²™	lections 2.5 mm: eto XF²™, Trentino ™, Style Elle XF²™, yle Emme XF²™	Gallery 1233, Navigator 1233, Universe 1433, Dynasty 1233	Vintage, Tango Classic, Step, Ideo, Rumba, Salsa Premium, Salsa Art Vision, Tango Art, Performance Fashion	Desso collections	Tarkett tiles collections
Product type	LVT	LVT	LVT	Heterogeneous acoustic vinyl	Heterogeneous compact vinyl	Heterogeneous vinyl		Linoleum	Laminate	Parquet	Textile tiles	Textile tiles
Main advantages	Loose-lay vinyl tiles No permanent adhesive needed; fast and easy installation Excellent resistance to scuffing, soiling and staining Excellent acoustic efficiency Superior indentation resistance	Boundless formats and colours Ideal for high traffic areas Highly resistant to scuffs, scratches and stains Easy to clean and maintain	Exclusive wood, stone and metal designs Fold-down vertical click installation Resistant to scuffs, scratches and stains Easy to clean and maintain	Impact sound reduction Comfort under the feet Very wide range of colours and designs TopClean XP™ reinforced surface treatment Phthalate-free technology	Heterogeneous flooring resistant to abrasion and furniture wheels Very wide range of colours and designs High indentation resistance because of compact backing TopClean XP™ reinforced surface treatment No wax, no polish for life Phthalate-free technology	Tarkett PUR treatment Extreme Protection Scratch, abrasion and scuff resistant Tarkett mechanical embossing Deep graining makes it look natural, more than ever before Easy to clean and install	• Tin pat • Eas wa • Na sus	5 mm thick meless marbled itterns in 60 colours asy maintenance: no ax or polish for life stural and stainable secial possibility l-s1	Easy installation and replacement Easy maintenance Suitable for self-regulating under floor heating system High resistance to wear and scratch	100% real wood Extensive range of accessories: skirtings, moldings and pipe covers in different wood species to complete the final touch Very stable multi-layer construction Proteco lacquer – one of the strongest surface protections in wood industry Suitable for self-regulating under floor heating systems (max 25 °C) Easy installation and maintenance Wide range of colours and effects	Endless design options with different colours, patterns and shapes Fast installation and easy (partial) replacement Installation can be phased to keep your business open to guests Cost effective: tiles are delivered in boxes, reducing transportation costs and making them easy to store on-site Flexibility: individual tiles can be replaced quickly and easily in-house if soiled or damaged Less waste: waste is significantly reduced compared to broadloom carpet	Plenty of different colours and patterns Fast installation and easy (partial) replacement Installation can be phased to keep your business open to guests Cost effective: tiles are delivered in boxes, reducing transportation costs and making them easy to store on-site Flexibility: individual tiles can be replaced quickly and easily in-house if soiled or damaged Less waste: waste is significantly reduced compared to broadloom carpet



Busy workplace corridors need durable floors that can withstand heavy foot traffic and are easy to clean and maintain. In consideration of their proximity to private offices, think about choosing floors that are specifically designed to reduce noise. Additionally, designs that generate a sense of rhythm are an excellent choice to break up any visual monotony.

I CORRIDORS

GVC in Office Complex Expo 2000, Sofia, Bulgaria, Textile tiles Desso Fuse Create and Fields

TARKETT RECOMMENDATION	iD Inspiration 70/55 & 70/55 Plus	iD Click Ultimate	iD Square & iD Inspiration Loose-lay	Acczent Excellence 80 & Acczent Platinium 100	iQ (Megalit, Eminent, Optima, Granit, Natural)	Collections 2.5 mm: Veneto XF²™, Trentino XF²™, Style Elle XF²™, Style Emme XF²™	Desso collections	Tarkett tiles collections	Cove formers, caps
Product type	LVT	Rigid LVT	LVT	Heterogeneous compact vinyl	Homogeneous vinyl	Linoleum	Textile tiles	Textile tiles	Accessories
Main advantages	Boundless formats and colours Ideal for high traffic areas Highly resistant to scuffs, scratches and stains Easy to clean and maintain	High traffic & static indentation resistance Easy to clean Click system, easy to install and remove Good acoustic performance	Loose-lay vinyl tiles No permanent adhesive needed; fast and easy installation Excellent resistance to scuffing, soiling and staining Excellent acoustic efficiency Superior indentation resistance	Heterogeneous flooring resistant to abrasion and furniture wheels Very wide range of colours and designs High indentation resistance because of compact backing TopClean XP™ reinforced surface treatment No wax, no polish for life Phthalate-free technology	Easy maintenance Extreme durability and outstanding flexibility iQ Unik surface restoration system Lowest life cycle cost on the market	Easy maintenance: no wax or polish for life Natural and sustainable	Endless design options with different colours, patterns and shapes Fast installation and easy (partial) replacement Installation can be phased to keep your business open to guests Cost effective: tiles are delivered in boxes, reducing transportation costs and making them easy to store on-site Flexibility: individual tiles can be replaced quickly and easily in-house if soiled or damaged Less waste: waste is significantly reduced compared to broadloom carpet	Plenty of different colours and patterns Fast installation and easy (partial) replacement Installation can be phased to keep your business open to guests Cost effective: tiles are delivered in boxes, reducing transportation costs and making them easy to store on-site Flexibility: individual tiles can be replaced quickly and easily in-house if soiled or damaged Less waste: waste is significantly reduced compared to broadloom carpet	For perfect coving and easier cleaning For perfect finish and superior protection of the wall covering edge For better finishing and protection at the outer wall angle



TARKETT RECOMMENDATION	iD Square & iD Inspiration Loose-lay	iD Mixonomi	iD Inspiration 70/55 & 70/55 Plus	iD Supernature & Tattoo	iD Click Ultimate	Acczent Excellence 80 & Acczent Platinium 100	Ruby 70 & Meteor 70	Desso collections	Tarkett tiles collections	Tactile guide strips & Floorcraft
Product type	LVT	LVT	LVT	LVT	Rigid LVT	Heterogeneous compact vinyl	Heterogeneous compact vinyl	Textile tiles	Textile tiles	Accessories
Main advantages	Loose-lay vinyl tiles No permanent adhesive needed; fast and easy installation Excellent resistance to scuffing, soiling and staining Excellent acoustic efficiency Superior indentation resistance	Different kinds of shapes, variety of colours Unlimited combinations Customised floor design	Boundless formats and colours Ideal for high traffic areas Highly resistant to scuffs, scratches and stains Easy to clean and maintain	Fine textures of wood and stone for custom looks Non pattern-repeat effect Thousands of design possibilities Ideal for high traffic areas Resistant to scuffs, scratches and stains	High traffic & static indentation resistance Easy to clean Click system, easy to install and remove Good acoustic performance	Heterogeneous flooring resistant to abrasion and furniture wheels Very wide range of colours and designs High indentation resistance because of compact backing TopClean XP™ reinforced surface treatment No wax, no polish for life Phthalate-free technology	Excellent resistance to indentation and abrasion Easy maintenance Anti-slip resistance R10 Mix of mineral and wood effects Low VOC emissions contribute to better indoor air quality Combine low cost with premium feel for heavy traffic floors	Endless design options with different colours, patterns and shapes Fast installation and easy (partial) replacement Installation can be phased to keep your business open to guests Cost effective: tiles are delivered in boxes, reducing transportation costs and making them easy to store on-site Flexibility: individual tiles can be replaced quickly and easily in-house if soiled or damaged Less waste: waste is significantly reduced compared to broadloom carpet	Plenty of different colours and patterns Fast installation and easy (partial) replacement Installation can be phased to keep your business open to guests Cost effective: tiles are delivered in boxes, reducing transportation costs and making them easy to store on-site Flexibility: individual tiles can be replaced quickly and easily in-house if soiled or damaged Less waste: waste is significantly reduced compared to broadloom carpet	Contrasted and tactile strips provide better orientation for visually impaired people Logos and signage to ease wayfindings

16 | 17



TARKETT RECOMMENDATION	Tapiflex Stairs	Inside & outside stair corners	Warning tiles	Stair nose
Product type	Heterogeneous acoustic vinyl	Accessories	Accessories	Accessories
Main advantages	 Contrasted integrated stair noses with 35-81% contrast Class 34, wear layer 1 mm: excellent resistance to scratches, abrasion, scuffing and soiling 18 dB / sonority Class A Specially designed edges to increase slip resistance and safety TopClean XP™ PUR: easy, low-cost maintenance Give the whole building a coherent design by mixing and matching with Tarkett's other HE collections 	Corners designed to form a neat and attractive edge around the open end of a step by concealing the edge of the floor covering and stair edging Colour-coordinated with PVC stair nosing	Standardised and studded accessory to signal level changes to visually impaired people Several colours available to enhance contrast and lisibility	Flexibile PVC stair nose Cut to size on-site and fixed with adhesive before floor covering




TARKETT RECOMMENDATION	iD Click Ultimate	Premium (Eclipse & Primo)	Ruby Metec		Veneto XF ^{2TM} (3.2 mm)	Spark	Stella
Product type	Rigid LVT	Homogeneous vinyl	Heterog compac		Linoleum	Heterogeneous compact vinyl	Heterogeneous compact vinyl
Main advantages	High traffic & static indentation resistance Easy to clean Click system, easy to install and remove Good acoustic performance	High traffic, scratch and static indentation resistance Easy to clean Excellent life cycle cost	Excellent resistant and abrasion Anti-slip resistance Easy maintenance Mix of mineral and Low VOC emission better indoor air q Combine low cost feel for heavy-traf	e R10 d wood effects as contribute to uality with premium	Superior XF ^{2™} protection for extreme mechanical and chemical toughness The classical marbled linoleum solution with soft or intense pattern variations for a timeless effect Easy maintenance: no wax or polish for life Natural, recyclable flooring made from sustainable materials Contributes to better indoor air quality (Floor Score certified)	Very resistant to abrasion, material made for commercial spaces Easy cleaning and maintenance Additional reinforcement Extreme Protection prevents dirt penetration into lower layers of product and significantly eases cleaning and maintenance Phthalate-free technology	Additional reinforcement Extreme Protection Easy cleaning and maintenance R10 slip resistance Phthalate-free technology




TARKETT RECOMMENDATION	Multisafe Aqua	Primo Safe.T	Granit Safe.T	Aquarelle Floor	Aquarelle Wall HFS	Drain	Cove former & junction profile	Threshold transition or wetrooms
Product type	Heterogeneous vinyl	Homogeneous anti-slip vinyl	Homogeneous anti-slip vinyl	Heterogeneous vinyl	Vinyl wall covering	Accessories	Accessories	Accessories
Main advantages	Next generation surface embossing Stone and fiber wood designs Waterproof all-inclusive wet room concept Slip-resistant (Class C) Hygienic and easy to maintain	Slip-resistant R10 grip Easy to clean and maintain Multi-solution offer, combining design and functional options Coordinated welding rods for perfect finishing	Durable anti-slip R10 Watertight solution: sealed joints, impervious surface Safety Clean XP™ surface treatment Highly flexible ease coving	Fresh colours and modern designs Waterproof installation Hygienic and easy to clean Full wetroom design concept	High weld strength > 150/50 mm TopClean XP™ PUR reinforced surface Easy cleaning, hygienic	To make cleaning easier when using high-pressure cleaning device	Flexible junction profile to reduce thickness difference between floor and wall covering for a perfect junction and a watertight installation	Rubber or vinyl threshold: 2 available versions including one that uses hot welding



TARKETT RECOMMENDATION	iQ Granit SD	Linoleum SD	Primo SD
Product type	Homogeneous vinyl	Linoleum	Homogeneous vinyl
Main advantages	 Electrical resistance 10⁶≤R≤10⁸ Ohm Unique patented conductive iQ PUR Colour-coordinated with iQ Granit Static dissipative product 	 Static dissipation to R1 ≤ 10⁶ Ohm Made from natural and renewable materials Outstanding resistance to abrasion 	 Economical ESD protection Electrical resistance of R1 ≤ 10⁶ Ohm Colour-coordinated with Primo and Eclipse Premium

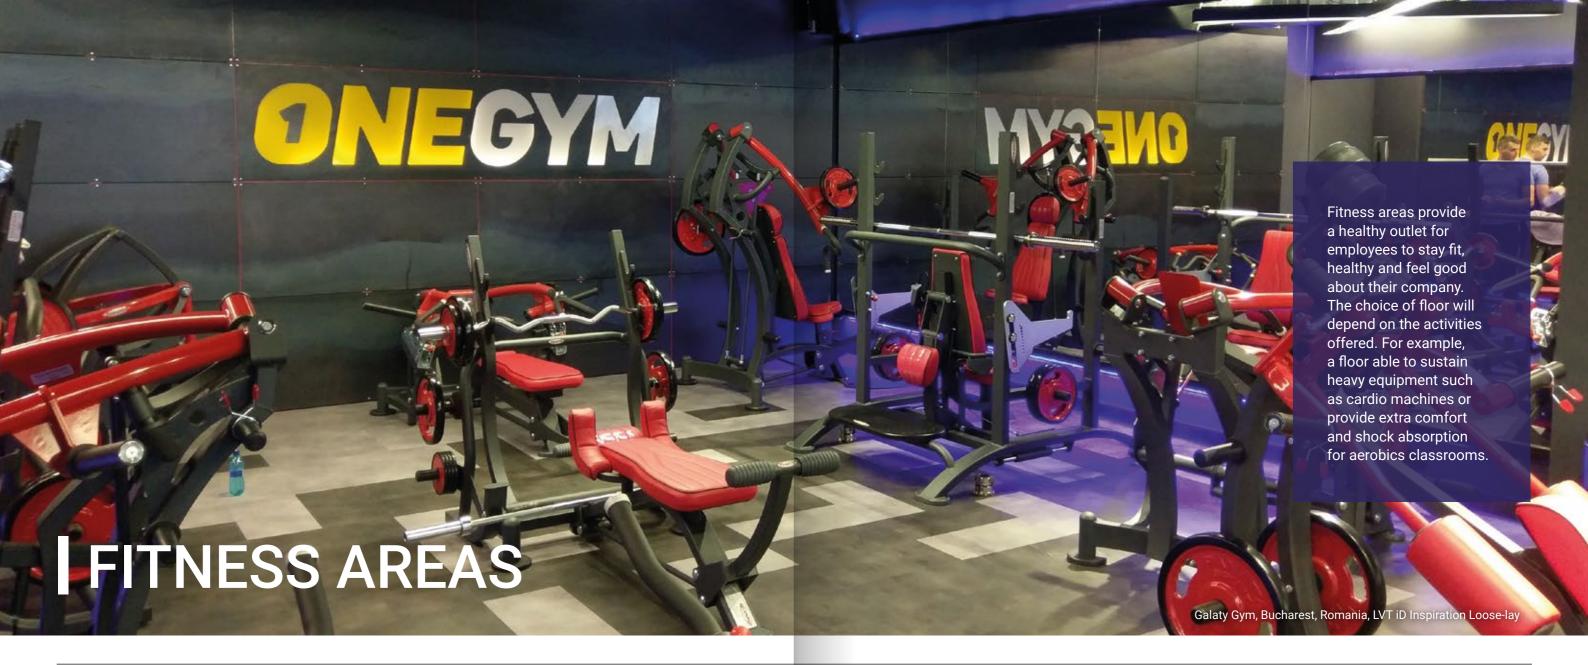

TARKETT RECOMMENDATION	iD Square & iD Inspiration Loose-lay	Tapiflex Excellence 80 & Tapiflex Platinium 100	Omnisports	Multiflex M (for fitness areas)
Product type	LVT	Heterogeneous acoustic vinyl	Sport vinyl	Sport parquet
Main advantages	No permanent adhesive needed; fast and easy installation Excellent resistance to scuffing, soiling and staining Excellent acoustic efficiency Superior indentation resistance	Impact sound reduction Comfort under the feet Very wide range of colours and designs TopClean XP™ reinforced surface treatment Phthalate-free technology	Shock absorption Resistance to heavy weights Easy to clean Indoor air quality	Multi-sports use Good performance (A4-compliant, EN 14904) Ideal for renovation (38 mm thick) Excellent underfoot and acoustic comfort Cost-effective maintenance

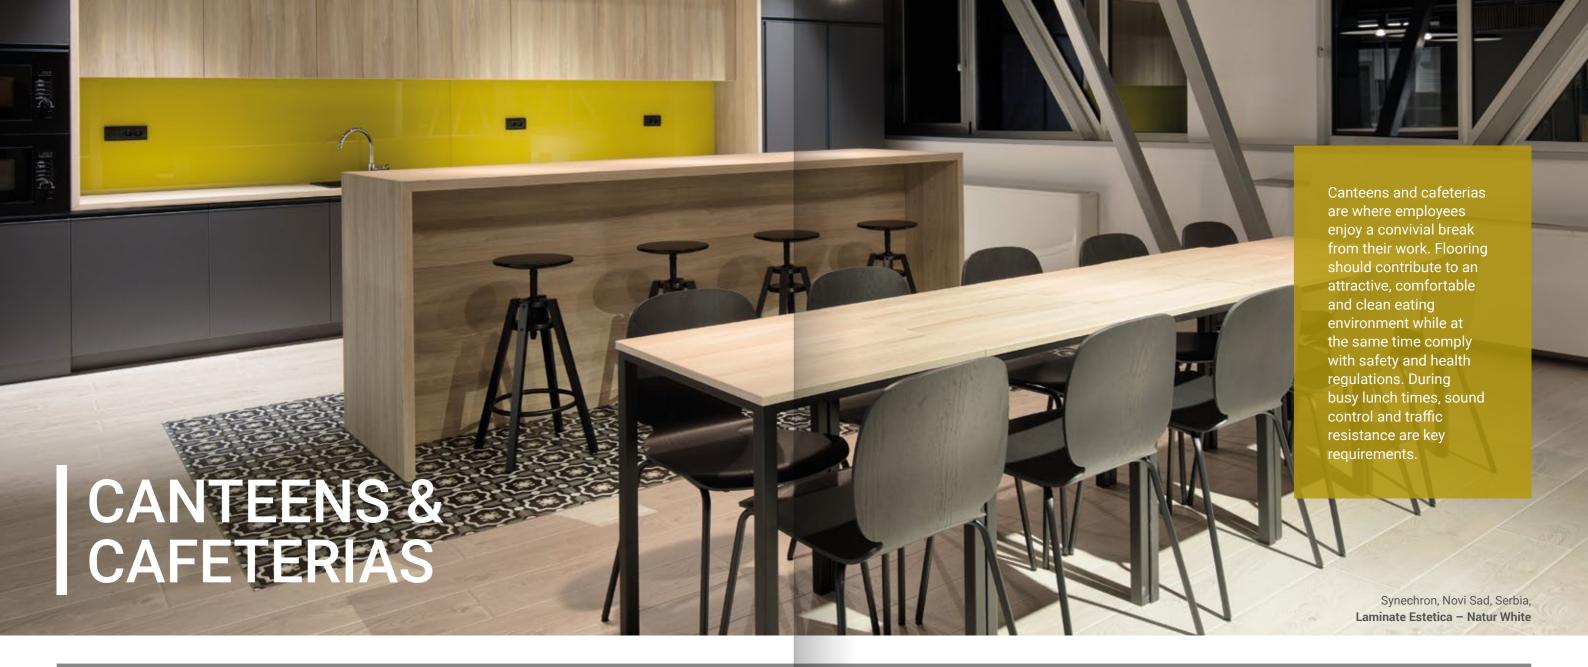

TARKETT RECOMMENDATION	iD Inspiration Click & Click Plus	iD Square & iD inspiration Loose-lay	iD Click Ultimate		Acczent Excellence 80 & Acczent Platinium 100	iQ (Megalit, Granit, Optima, Natural, Eminent)	Pilot 1033, Gallery 1233, Navigator 1233, Universe 1433	Skirtings, caps, corners
Product type	LVT	LVT	Rigid LVT		Heterogeneous compact vinyl	Homogeneous vinyl	Laminate	Accessories
Main advantages	Exclusive wood, stone and metal designs Fold-down vertical click installation Resistant to scuffs, scratches and stains Easy to clean and maintain	Loose-lay vinyl tiles No permanent adhesive needed; fast and easy installation Excellent resistance to scuffing, soiling and staining Excellent acoustic efficiency Superior indentation resistance	High traffic & static indentation resistance Easy to clean Click system, easy to install and remove Good acoustic performance	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Heterogeneous flooring resistant to abrasion and furniture wheels Very wide range of colours and designs High indentation resistance because of compact backing TopClean XP™ reinforced surface treatment No wax, no polish for life Phthalate-free technology	Easy maintenance Extreme durability and outstanding flexibility iQ Unik surface restoration system Lowest life cycle cost on the market	Easy installation and replacement Easy maintenance Suitable for self-regulating under floor heating system High resistance to wear and scratch	Wide range of colour-coordinated skirtings Perfect finish and superior protection of the wall covering edge Better finishing and protection at the outer wall angle with set-in corner Easier to maintain as it is welded to floor covering



TARKETT RECOMMENDATION	iD Inspiration Click & Click Plus	iD Inspiration 70/55 & 70/55 Plus	iD Square & iD Inspiration Loose-lay	iD Click Ultimate	Acczent Excellence 80 & Acczent Platinium Tapiflex tiles 65 (2.5 mm) Acczent Excellence 80 Tarkett tiles Collections Tarkett tiles Collections
Product type	LVT	LVT	LVT	Rigid LVT	Heterogeneous Heterogeneous Linoleum Textile tiles Textile tiles
Main advantages	Exclusive wood, stone and metal designs Fold-down vertical click installation Resistant to scuffs, scratches and stains Easy to clean and maintain	Boundless formats and colours Ideal for high traffic areas Highly resistant to scuffs, scratches and stains Easy to clean and maintain	No permanent adhesive needed; fast and easy installation Excellent resistance to scuffing, soiling and staining Excellent acoustic efficiency Superior indentation resistance	High traffic & static indentation resistance Easy to clean Click system, easy to install and remove Good acoustic performance	 Heterogeneous flooring resistant to abrasion and furniture wheels Very wide range of colours and designs High indentation resistance because of compact backing TopClean XP^w reinforced surface treatment No wax, no polish for life Phthalate-free technology Acoustic tile version ideal for heavy-traffic abrasion and furniture wheels Acoustic tile version ideal for heavy-traffic ideal for heavy-traffic abrasion and furniture wheels 12 colours Cost-effective maintenance in 60 colours in 60 colours colours, patterns and shapes Fast installation and easy (partial) replacement colours and patterns and shapes Fast installation and easy (partial) replacement Installation can be phased to keep your business open to guests Cost effective: tiles are delivered in boxes, reducing transportation costs and making them easy to store on-site Flexibility: individual tiles can be replaced quickly and easily inhouse if soiled or damaged Less waste: waste is significantly reduced compared to broadloom carpet

Technical data at a glance

For more information on Textile Tarkett and Desso collections, visit our website or Tarkett SEE selling points.

			iD Inspiration	:0				:D C		iQ collections (Optima,	Durantiana	A
		iD Inspiration 70/55 & 70/55 Plus	Loose-lay	iD Inspiration Click & Click Plus	iD Click Ultimate		iD Mixonomi	iD Supernature & Tattoo	iD Square	Megalit, Natural, Granit, Eminent)	Premium (Primo & Eclipse)	Acczent Excellence 80
		LVT	LVT	LVT	Rigid LVT		LVT	LVT	LVT	Homogeneous vinyl flooring	Homogeneous vinyl flooring	Heterogeneous compact vinyl
Design		75,000 possible options, mix of designs, formats, colours, embossings	22 original, inspiring designs	Available in 42 designs & colours	15 designs and colours		33 designs and colours, 10 different shapes	5 fine textures of wood and stone in 16 natural shades for each	50 contemporary patterns and decors	Plenty of colours and designs	66 colours, non-directional design	127 colours
Acoustic comfort	Impact sound reduction EN ISO 717/2	2 dB	8 dB	3 dB	19 dB		2 dB	2 dB	15 dB (±1 dB)	-	-	3 dB
Wear layer thickness	ISO 24340	0.70 mm (iD 70) 0.55 mm (iD 55)	0.55 mm	0.55 mm	0.70 mm		0.70 mm	0.70 mm	0.80 mm	-	-	0.80 mm
	Commercial Class EN 685 - ISO10874	34 (iD 70) 33 (iD 55)	33	33	34		34	34	34	34	34	34
	Indentation ISO 24343-1 (EN 433)	0.05 mm	≤ 0.10 mm	≤ 0.10 mm	≤ 0.05 mm		≤ 0.05 mm	≤ 0.05 mm	≤ 0.15 mm	0.02 mm	0.03 mm	≤ 0.03 mm
Durability & Resistance	Reaction to fire EN 13501-1	Bfl-s1 glued on wood panel and concrete	Bfl-s1 loose laid on wood panel and A2fl-s1 or A1fl class substrate	Bfl-s1 loose laid over concrete substrate	Bfl-s1		Bfl-s1 glued over concrete substrate Bfl-s1 glued over wood substrate	Bfl-s1 glued over concrete substrate Bfl-s1 glued over wood substrate	Bfl-s1 loose laid or glued over any A2fl or A1fl substrate (concrete) Cfl-s1 loose laid or glued over any derivate wood substrate	Bfl-s1	Bfl-s1	Bfl-s1 glued on derivate wood panel
Easy and low cost	Surface treatment	TopClean XP™	TopClean XP™	TopClean XP™	PUR Ultimate		TopClean XP™	TopClean XP™	TopClean XP™	iQ PUR	PUR Reinforced	TopClean XP™
maintenance	No wax, no polish for life	+	+	+	+		+	+	+	+	+	+
Slip resistance	DIN51130	R9/R10 (depending on embossing)	R9	R9/R10 (depending on embossing)	R9		R10	R9	R9	R9	R9	R9/R10
	ISO 16000 TVOC ≤ 1000 μg/m³	< 10 μg/m³	< 100 μg/m³	≤ 10 µg/m³	≤ 100 µg/m³		≤ 10 µg/m³	≤ 10 µg/m³	< 10 μg/m³	< 10 μg/m³	< 10 μg/m³	≤ 10 µg/m³
Indoor air quality & Environment	Phthalate-free technology	+	+	+	+		+	+	+	+	+	+
	% recyclable	100%	100%	100%	100%		100%	100%	100%	100%	100%	100%
	% recycled content	38%	-	-	-		32%	32%	3%	26%	26%	33%
Installation system		Glue down planks & tiles	Loose-lay	Click system	Click system		Glue down different shapes	Glue down different shapes	Loose-lay	Glue down rolls	Glue down rolls	Glue down rolls & tiles

Technical data at a glance

		Acczent Platinium 100	Tapiflex Excellence 80	Tapiflex Platinium 100	Tapiflex Tiles 65	Spark & Stella	Ruby 70 & Meteor 70	Force	Veneto XF ^{2TM} (2.5 mm), Trentino XF ^{2TM} , Veneto XF ^{2TM} Bfl (2.5 mm)	Veneto XF²™ (3.2 mm)	Style Elle XF ^{2TM} , Style Emme XF ^{2TM}	
		Heterogeneous compact vinyl	Heterogeneous acoustic vinyl	Heterogeneous acoustic vinyl	Heterogeneous acoustic vinyl	Heterogeneous compact vinyl	Heterogeneous compact vinyl	Heterogeneous vinyl	Linoleum	Linoleum	Linoleum	
Design		Available in 72 designs & colours	More than 100 colours with uni, wood & phosphorescents	Available in 71 designs & colours	Available in 12 designs & colours	Plenty of colours and designs	63 designs & colours	Available in 29 designs & colours	Plenty of colours and designs	Available in 9 designs & colours	Stylish linear design in 8 colours	
Acoustic comfort	Impact sound reduction EN ISO 717/2	9 dB	19 dB	17 dB	19 dB	-	Ruby 5 dB Meteor 7 dB	10 dB	≤ 6 dB	8 dB	6 dB	
Wear layer thickness	ISO 24340	1.02 mm	0.80 mm	1.02 mm	0.65 mm	0.70 mm	0.70 mm	0.60 mm	-	-	-	
	Commercial Class EN 685 - ISO10874	34	34	34	34	34	34	33	34	34	34	
Durability &	Indentation ISO 24343-1 (EN 433)	0.04 mm	0.10 mm	0.09 mm	0.12 mm	≤ 0.1 mm Ruby 0.02 mm Meteor 0.04 mm		0.20 mm	0.08 mm	0.10 mm	0.08 mm	
Resistance	Reaction to fire EN 13501-1	Bfl-s1 glued over any A2fl or A1fl substrate (concrete) Bfl-s1 glued over any derivate wood substrate	Bfl-s1 glued over any A2fl or A1fl substrate (concrete) Cfl-s1 glued over any derivate wood substrate	Bfl-s1 glued over any A2fl or A1fl substrate (concrete) Cfl-s1 glued over any derivate wood substrate	Bfl-s1 glued over a Class A2fl-s1 or A1fl substrate	Bfl-s1	Bfl-s1 glued on derivate wood panel	Bfl-s1	Cfl-s1 (Veneto XF ^{2™} , Trentino XF ^{2™}) Bfl-s1 (Veneto XF ^{2™} Bfl)	Cfl-s1	Cfl-s1	
Easy and low cost	Surface treatment	TopClean XP™	TopClean XP™	TopClean XP™	TopClean XP™	Extreme Protection	TopClean XP™	X-TREME	XF ^{2TM}	XF ^{2TM}	XF ^{2TM}	
maintenance	No wax, no polish for life	+	+	+	+	+	+	+	+	+	+	
Slip resistance	DIN51130	R9	R9/R10	R9	R9	R10	R10	R9/R10	R9	R9	R9	
	ISO 16000 TVOC ≤ 1000 μg/m³	≤ 10 µg/m³	≤ 10 µg/m³	≤ 10 µg/m³	≤ 10 µg/m³		≤ 100 µg/m³		≤ 100 μg/m³	≤ 100 µg/m³	≤ 100 µg/m³	
Indoor air quality &	Phthalate-free technology	+	+	+	+	+	+	+	+	+	+	
Environment	% recyclable	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	
	% recycled content	29%	21%	21%	29%	-	Ruby 31% Meteor 14%	-	36%	36%	30%	
Installation system		Glue down rolls	Glue down rolls or tiles	Glue down rolls	Glue down tiles	Glue down rolls	Glue down rolls	Glue down rolls	Glue down rolls	Glue down rolls	Glue down rolls	

Technical data at a glance

	Multiflex M
	Sport parquet
Wood species	Beech, OAK, Maple
Format Type	Plank
Length	2281 mm
Width	194 mm
Surface treatment	Proteco Lacquer
Locking system	2-lock
Reaction to fire	Dfl-s1
Underfloor heating	Suitable (maximum 27°C)
FIBA Certificate	Yes
Shock absorption	A4 (≥ 55% < 75%)
Items per box	6
Surface per box	2.660 m²


		Omnisports Reference Multi-Use	Granit safe.T	Linoleum SD	iQ Granit SD	Primo SD	Tapiflex Stairs	Aquarelle Floor	Aquarelle Wall HFS
		Indoor sports vinyl	Slip resistant homogeneous vinyl flooring	Static Dissipative linoleum	Static Dissipative homogeneous vinyl	Static Dissipative homogeneous vinyl	Heterogeneous acoustic vinyl	Heterogeneous vinyl	Heterogeneous vinyl wall covering
Design		Available in 24 designs & colours	Available in 16 designs & colours	Plenty of colours and designs	Available in 14 designs & colours	Available in 8 designs & colours	Available in 22 designs & colours	Available in 32 designs & colours	Available in 32 designs & colours
Acoustic comfort	Impact sound reduction EN ISO 717/2	65 dB	-	6 dB	-	-	18 dB	-	-
Wear layer thickness	ISO 24340	-	-	-		-	1.0 mm	0.35 mm	0.12 mm
	Commercial Class EN 685 - ISO10874	-	34	34	34	34	34	31	-
Durability &	Indentation ISO 24343-1 (EN 433)	0.10 mm	0.02 mm	0.08 mm	0.02 mm	0.03 mm	0.17 mm	0.10 mm	-
Resistance	Reaction to fire EN 13501-1	Cfl-s1	Bfl-s1	Cfl-s1	Bfl-s1	Bfl-s1	Bfl-s1 glued over any A2fl or A1fl substrate (concrete) Cfl-s1 glued over any derivate wood substrate	Bfl-s1 glued on any derivate wood panel	B-s2 d0 on non metal A1 or A2-s1, d0 class substrate
Easy and low cost	Surface treatment	TopClean XP™	Safety Clean XP™	XF ^{2TM}	iQ PUR	PU Standard	TopClean XP™	TopClean XP™	TopClean XP™
maintenance	No wax, no polish for life	+	+	+		+	+	+	+
Slip resistance	DIN51130	-	R10	R9	R9	R9	R10	R10	-
	ISO 16000 TVOC ≤ 1000 μg/m³	≤ 10 µg/m³	≤ 10 μg/m³	≤ 100 μg/m³	≤ 10 μg/m³	≤ 10 µg/m³	< 10 μg/m³	< 10 μg/m³	≤ 10 µg/m³
Indoor air quality &	Phthalate-free technology	+	+	+	+	+	+	+	+
Environment	% recyclable	100%	100%	100%	100%	100%	100%	100%	100%
	% recycled content	14%	-	18%	-	26%	25%	-	-
Installation system		Glue down	Glue down	Glue down	Glue down	Glue down	Glue down	Glue down rolls	Glue down

 $\frac{36}{3}$

				L			
		NAVIGATOR 1233	PILOT 1033	UNIVERSE 1433	GALLERY 1233	DYNASTY 1233	ESTETICA 933
Dimensions (mm)	EN 13329	1292*194*12	1292*159*10	1292*194*14	1292*116*12	1292*159*12	1292*194*9
Supporting foundation (HDF)	EN 316	(density 875 kg/m³; +/- 20 kg/m³)	(density 875 kg/m³; +/- 20 kg/m³)				
Locking system	TC-lock	TC-lock (2G)	TC-lock (2G)				
Protection of edges	According TC 5536-001-59066253-2014	Tech-3S AquaStop	Tech-3S AquaStop				
Forecasted service life		not less than 25 years	not less than 25 years				
Class of usage	EN 13329	33	33	33	33	33	33
Resistance to abrasion	EN 13329 application E	AC5	AC5	AC5	AC5	AC5	AC5
Impact resistance	EN 13329	IC3	IC3	IC3	IC3	IC3	IC3
Resistance to cigarettes	EN 438-2	≥ 4	≥4	≥ 4	≥ 4	≥ 4	≥4
Thickness	EN 13329	12 mm; +/- 0.5 mm	10 mm; +/- 0.5 mm	14 mm; +/- 0.5 mm	12 mm; +/- 0.5 mm	12 mm; +/- 0.5 mm	9 mm; +/- 0.5 mm
Length	EN 13329	1292 mm; +/- 0.5 mm	1292 mm; +/- 0.5 mm				
Width	EN 13329	194 mm; +/- 0.1 mm	159 mm; +/- 0.1 mm	194 mm; +/- 0.1 mm	116 mm; +/- 0.1 mm	159 mm; +/- 0.1 mm	194 mm; +/- 0.1 mm
Straightness of edges of upper layer	EN 13329	≤ 0.3 mm/m	≤0.3 mm/m				
Clear gaps between panels	EN 13329	average ≤ 0.15 mm; maximal ≤ 0.20 mm	average ≤0.15 mm; maximal ≤0.20 mm				
Difference in height between panels	EN 13329	average ≤ 0.10 mm; maximal ≤ 0.15 mm	average ≤0.10 mm; maximal ≤0.15 mm				
Fire safety	C-RU.ПБ.25.B.04266	KM 5	KM 5				
Class-formaldehyde	EN 717-1	E1	E1	E1	E1	E1	E1
Thermal resistance (m²K)/W	EN12667:2001	0.11	0.11	0.11	0.11	0.11	0.11
		LOGISTICS					
boards in pack		5 boards	6 boards	5 boards	5 boards	5 boards	7 boards
m² in pack		1.253 m ²	1.232 m ²	1.253 m ²	0.749 m²	1.027 m²	1.754 m²
packs in pallet/m² in pallet		56 packs/70.168 m ²	75 packs/92.400 m ²	48 packs/60.144 m ²	84 packs/62.916 m ²	70 packs/71.89 m²	56 packs/98.245 m²

							PARQUET									
		Performance Fashion	Tango Vintage	Tango Art	Tango	Tango Classic		Step	ldeo	Rumba	Salsa Art Vision	Salsa Art	Salsa Premium	Salsa	Bolero	Samba
Dimensions (mm)	EN 13329	2215*164*14	2215*164*14	2215*164*14	2215*164*14	1200*164*14	П	1000*140*14 1000*164*14 1200*140*14 1200*164*14	2283*194*14	1200*120*14	2283*194*14	2283*194*14	2283*194*14	2283*194*14	1123*194*14	1123*194*14
Locking system	T-lock	T-lock	T-lock	T-lock	T-lock	T-lock		T-lock	T-lock	T-lock	T-lock	T-lock	T-lock	T-lock	T-lock	T-lock
Thickness	EN 13329	14 mm	14 mm	14 mm	14 mm	14 mm		14 mm	14 mm	14 mm	14 mm	14 mm	14 mm	14 mm	14 mm	14 mm
Length	EN 13329	2215 mm	2215 mm	2215 mm	2215 mm	1200 mm		1000 / 1200 mm	2283 mm	1200 mm	2283 mm	2283 mm	2283 mm	2283 mm	1123 mm	1123 mm
Width	EN 13329	164 mm	164 mm	164 mm	164 mm	164 mm		140 / 164 mm	194 mm	120 mm	194 mm	194 mm	194 mm	194 mm	194 mm	194 mm
					Lo	OGISTICS										
boards in pack		6	6	6	6	6		6	6	6	6	6	6	6	6	6
m² in pack		2.18	2.18	2.18	2.18	1.182		0.840 / 0.984 / 1.008 / 1.182	2.658	0.864	2.658	2.658	2.658	2.658	1.307	1.307
m² in pallet		130.8	130.8	130.8	130.8	70.92		70.92 (164 x 1200) 70.56 (140 x 1200) 59.04 (164 x 1000) 50.40 (140 x 1000)	132.9	68.8	132.9	132.9	132.9	132.9	47.05	65.35


Our references

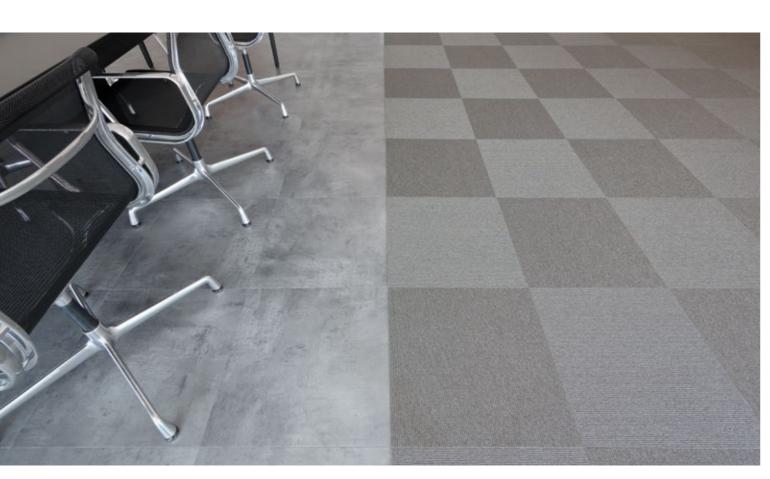

DBA, Novi Sad, Serbia, Parquet Salsa Natur, Textile tiles Sky, LVT iD Inspiration 70



AXA, Brussels, Belgium, Desso Fields Palatino Tweed

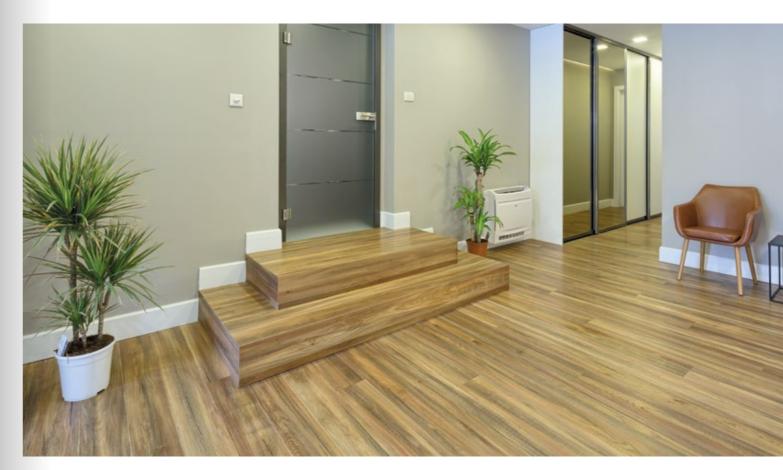

Entext, Podgorica, Montenegro, Parquet Tango Oak Schwarzwald



FSD, Novi Sad, Serbia, LVT iD Inspiration 70 - Vintage Zinc




Partena Promeris, Brussels, Belgium, Airmaster Atos, Airmaster Sphere, Desert Airmaster, Textile Desso




Deloitte, Zaventem, Belgium, Desso Essence Stripe Palatino



NTT Data, Novi Sad, Serbia, Textile tiles SKY

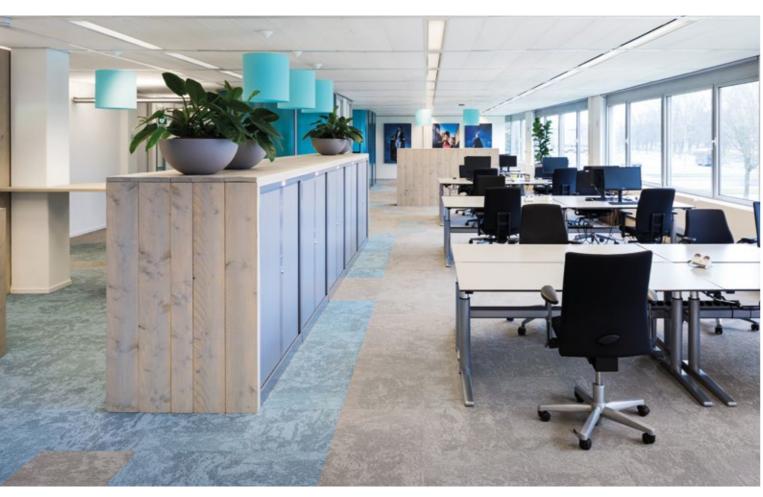


Municipality of Breda, The Netherlands, Airmaster Sphere, Desert Airmaster, Rock, Textile Desso

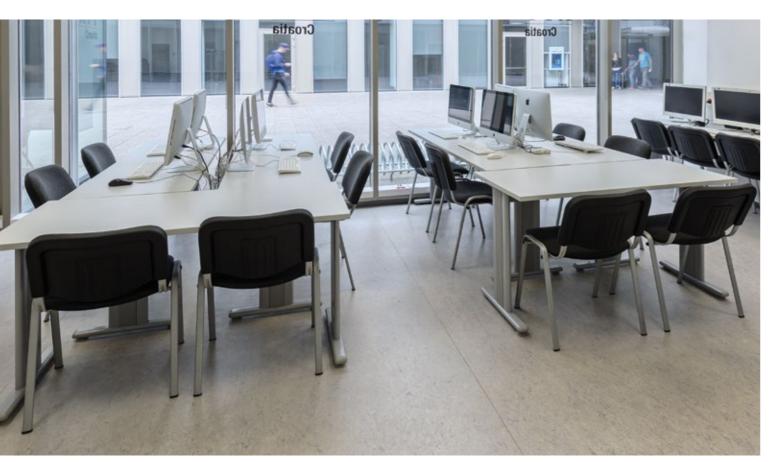

Rochester Institute of Technology (RIT), Zagreb, Croatia, Linoleum Veneto $xf^{2^{TM}}$ 2.5 mm




Petrans, Ljubljana, Slovenia, LVT iD Inspiration 55

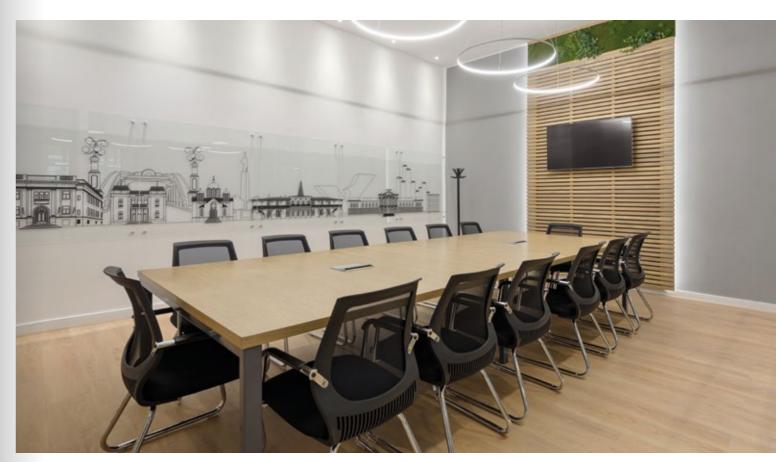

SCGM, Kragujevac, Serbia, LVT Starfloor Click 55 – Modern Oak



NLP office, Sofia, Bulgaria, LVT iD Essential 30

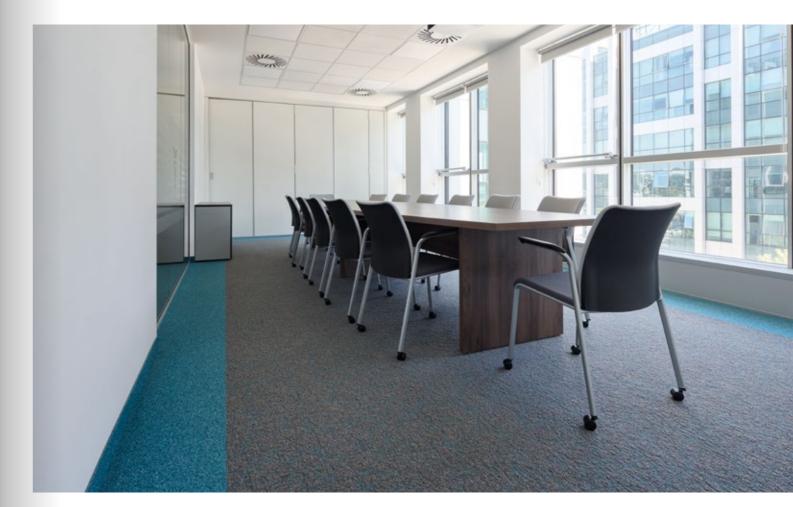

Worldwide Clinical Trials, Belgrade, Serbia, Textile tiles Desso Essence, Salt & Rock



Tarkett Office, Zagreb, Croatia, Multiproduct (LVT iD Square)

SERBIA: Tarkett SEE, Industrijska zona 8, 21400 Bačka Palanka, Phone: +381 21 7557 649, Fax: +381 21 750 133, www.tarkett.rs ROMANIA: Tarkett SEE, Willbrook Platinum Business & Convention Center, 172-176 Bucharest - Ploiest Road, Building "A", 3rd floor, 013697 Bucharest, Sector 1 Romania, Phone: +40 21 224 0124, www.tarkett.ro BULGARIA: 23A Dragan Tsankov Blvd., office building Tetrix, floor 1, office 7, Sofia, Phone: +359 2 986 7988, www.tarkett.bg CROATIA: Tarkett SEE, Buzinski prilaz 10, 10 000 Zagreb, Phone: +385 98 385 194, www.tarkett.hr BOSNIA AND HERZEGOVINA: Tarkett SEE, Jovana Dučića 74, 78000 Banja Luka, Phone: +387 65 770 565, +387 65 402 221, www.tarkett.ba

