



Designed
for Life



WATERPROOF



CLEANS EASILY



ULTIMATE
DURABILITY



EASY TO INSTALL



QUIET



NO TEMPERATURE LIMITS






The beauty of better engineering.

ProGen™ is a radical leap forward in flooring technology – a rigid core construction engineered from the inside, out – designed to outperform the rigors of daily wear. It holds up beautifully to the demands of busy, active households – from kids and pets to water and dirt. ProGen also handles sunlight and extreme temperature changes, resisting buckling, denting and warping.

With beautiful, authentic-looking designs, an easy, no-mess installation, and guaranteed long-term wear, ProGen promises a better experience every step of the way.

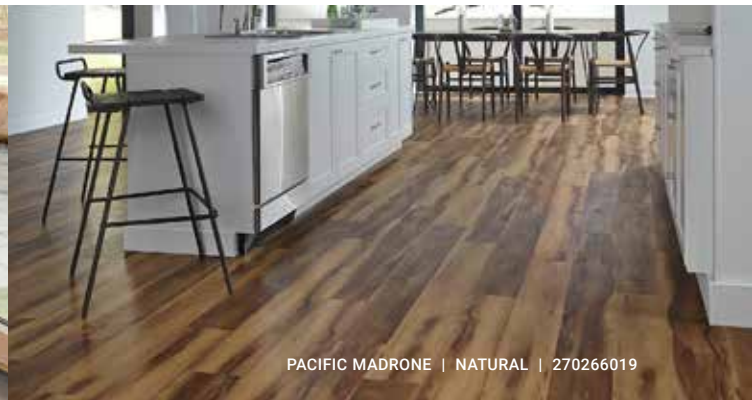

WATERPROOF



CLEANS EASILY



ULTIMATE
DURABILITY



EASY TO INSTALL



QUIET



NO TEMPERATURE LIMITS

Thermal Stability

Use in any room in the home. ProGen is designed to handle wide temperature fluctuations from windows and sunlight.

Easy Installation

Its easy Uniclic® system is faster than traditional installation systems, saving you time and money.

Durable

Resists the stresses of modern life from children to high heels to heavy furniture.

Waterproof

Safe to use in kitchens and bathrooms for a modern look throughout the home.

Rigid Core

Overcomes subfloor imperfections, unlike traditional luxury vinyl tile.

Quiet

IIC rating of 68 means superior sound absorption to drastically improve overall comfort.

ProGen's next-generation technology is designed to stand up to the demands of modern life—and whatever is thrown, dropped, spilled or scraped on it. Because ProGen is durable, waterproof, dimensionally stable, and easy to install, it can be used in any room—including all-season rooms with extreme temperature changes and rooms that are most prone to moisture and spills, like kitchens and baths.



New, Trend-Setting Designs

Make your design visions a reality through a variety of on-trend designs.



Realistic Embossing




Modern Painted Bevels



Installation

Floating Floor	Quick and Simple Angle-Angle Click
Above/At/ Below Grade	✓
No Acclimation	✓
3-Seasons Room	✓
No Temperature Limitations	✓
Acoustic Rating	Total IIC of 68 (6" Concrete Slab + Suspended Ceiling)

Dimensional Stability and Durability

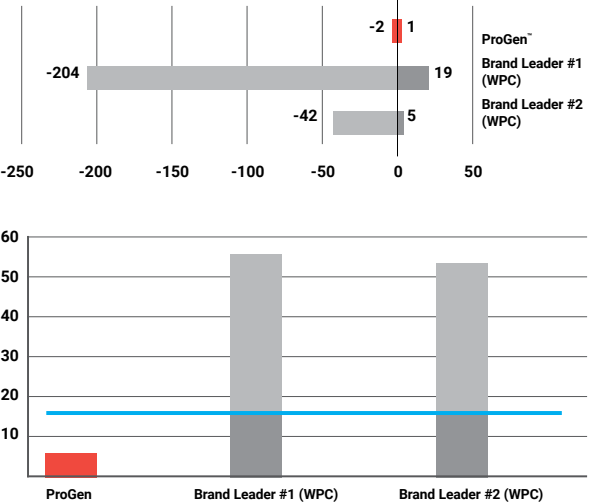



Durham Pine | Sun-Toned
270264014



Red Oak | Ginger
270264016



Rock Maple | Medio
270264012



Durham Pine | Tavern
270264013



Stained Maple | Carmine
270264015



Vista Oak | Limed Natural
270265015



Cerused Oak | Powder
270265013



Stokes Range | Relic
270265018



Tannin Walnut | Gris
270265016



Cerused Oak | Denim
270265014



Aurora Oak | Starry Night
270265020



Brushed Pine | Sorrel
270265019



Stokes Range | Dusk
270265017



West Oak | Loft
270266022



West Oak | Drift
270266024



West Oak | Natural
270266021



Spicebark Hickory | Fumed
270266016



Pacific Madrone | Natural
270266019



Spicebark Hickory | Comino
270266017



West Oak | Mountane
270266023



North Shore Pine | Cascade
270266020



Milled Oak | Copper
270266018

 Painted Bevel

Matching Accessories:



T-Mold



Universal Reducer



Stair Nose




Flush Mount Stair Nose


A Selection of Stone Patterns.




Fleury Travertine | Verona
270288000

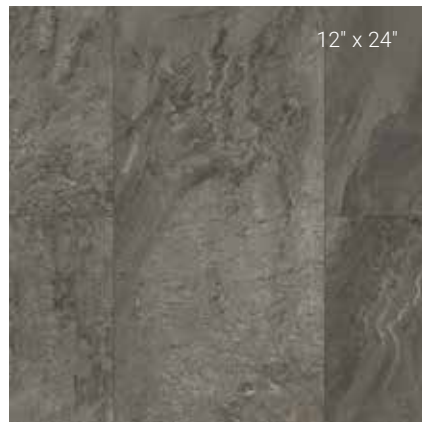


Villa Slate | Spire
270288001

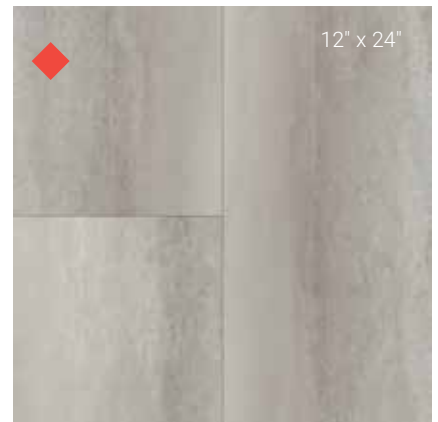

Arcadian | Featherstone
270288002

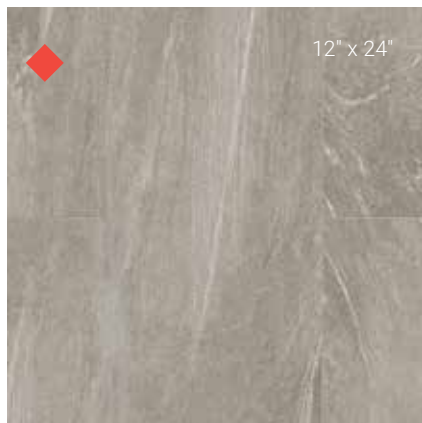

Pavestone | Luxor
270288003

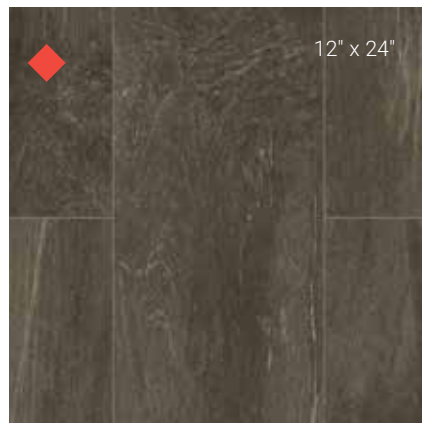

Pavestone | Cambria
270288004



Outland Path | Brindle
270282009



Marble Nouveau | Ibis
270282006



Quartzite | Dune
270282007



Quartzite | Ashen
270282008





SPECIFICATIONS

Total Thickness	5 mm			
ProGen Core™ Technology	4 mm			
Acoustical Backing Layer	1 mm IXPE			
Wear Layer Thickness	20 mils			
Material	Phthalate Free, 100% Virgin Material			
Reusable Content	100% Reclaimable			
Plank Size	5" x 48"	7" x 60"	9" x 24"	12" x 24"
Sq. Ft. per Carton	26.68 sq. ft.	29.61 sq. ft.	20.96 sq. ft.	28.03 sq. ft.
Planks per Carton	16	10	14	14
Cartons per Pallet	56	40	64	54
Lbs. per Carton	42 lbs.	45 lbs.	33.5 lbs.	45 lbs.
ASTM F2199 (Dimensional Stability)	Passes			
ASTM F1914 (Residual Indentation)	Passes (PSI Equivalent > 5,000 lbs.)			
ASTM F1514 (Heat Stability)	Passes			
ASTM F1515 (Light Stability)	Passes			
ASTM E2179 (Impact Sound Reductions)	Δ IIC \geq 20 dB			
IIC Impact Sound Reduction Rating	68			
ASTM F925 (Resistance to Chemicals)	Passes			
ASTM D5116 (VOC Requirements)	Passes < 0.1 mg/m ³			
Scratch/Scuff/Abrasion Properties	Excellent			
Phillips Castor Chair @ 100 lbs.	Passes @ 25,000 cycles			
Installation System	Uniclic®			
Certification	FloorScore® Certification			
Residential Warranty	Lifetime			
Light Commercial Warranty	15-Year			
3-Seasons Warranty	10-Year			



CERTIFIED BY
SCS Global Services

Tarkett North America

30000 Aurora Road
Solon, OH 44139
USA: 1-877-TARKETT (1-877-827-5388)
Canada: 1-877-436-6267

www.tarkettna.com

ON THE FRONT COVER:
PAVESTONE | CAMBRIA | 270288004

©2020 Tarkett North America
02/2020
Printed in USA
27015700020