Johnsonite

0

Triumph and Inertia® RUBBER SPORTS FLOORING

The starting lineup of sports flooring.



With heroic strength and all-star comfort, Johnsonite's rubber sports flooring is built for high-energy spaces. Triumph is designed with a 3/8" thickness to resist ice skates, golf cleats and dropped weights. For less extreme areas, Inertia's ¼" thickness offers acoustical control, comfort and durability. Both are available in identical colorways to allow design coordination and value engineering throughout the entire facility. That's teamwork at its best.

It's all about teamwork.



Floating flexibility.

a a 8


SlideLock®

MULTI-FUNCTIONAL + SPORTS FLOORING

With a patented hidden locking system and no need for adhesive, SlideLock improves the speed and flexibility of project installations, while maintaining access to mechanicals below the subfloor. Tiles are locked together using a seam roller, and individual tiles can easily be removed and replaced, without use of special tools. This glueless floating system is ideal for both permanent installations, and as a temporary flooring solution.







3/8"

TRIUMPH

Never hurts to start off a few steps ahead. And that's what you get with Triumph flooring. Tough, flexible and performance-ready, this floor is engineered to hold up under constant traffic, sports activities and heavy sporting equipment. Made of 3/8" rubber, Triumph absorbs noise and resists impact, shock, spikes and skates. It's ideal for any high-energy application. And with a wide range of solid and patterned colors, everybody wins.

APPLICATIONS

- fitness centers
- workout rooms
- ski lodges
- ice rinks 1
- weight rooms
- golf course
- indoor facilities1
- correctional facilities⁴ - dressing rooms² locker rooms² pro shops²

- daycare centers

production areas⁵

- assembly and

- indoor stadium tunnels²
- physical therapy rooms³
- retail, office and public areas

TRIUMPH WITH HAMMERED TEXTURE	Thickness	Speckled	Mesto®	Prima [®] Marbleized [∞] and Olio [®]	Solid Colors
Square Edge Tile 24" x 24"	3/8"	20 colorways available	6 colorways available	SO	SO
Interlocking Tile 24" x 24" (23" x 23" net)	3/8"	20 colorways available	6 colorways available	SO	SO
SlideLock® Tile 24" x 24" net (studded back)	3/8"	20 colorways available	6 colorways available	SO	SO

Matching accessories available in solid colors (not skate and spike resistant).


For more detailed information regarding product features, installation, maintenance, specifications and case study installations, visit tarkett.com.


Interlocking tiles may be used where lightweight rolling loads are present.

Rolling traffic is not permitted over SlideLock tile.

SO = Special Order

- ¹ Specify Square Edge or Interlocking only ² Specify Square Edge or Interlocking for
- ice skate blade and spike traffic
- ³ Specify Square Edge or Interlocking for wet areas ⁴ Specify Square Edge only
- ⁵ Triumph is not oil and grease resistant
- Note: SlideLock requires different maintenance than Square Edge and Interlocking profiles.

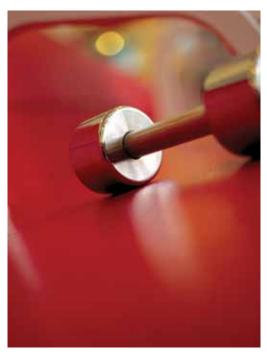



INERTIA[®]

Let's end the rival between price and performance. This 1/4" rubber floor provides a more affordable alternative to Triumph, for applications that don't involve such extreme activity. Identical to Triumph aesthetically, Inertia also blends with it seamlessly. This allows you to achieve various levels of functionality within highperformance areas. Now that's an accomplishment you simply can't beat.

APPLICATIONS

- fitness centers
- workout rooms
- ski lodges

locker rooms¹

- dressing rooms¹
- physical therapy rooms ² retail, office and

• indoor stadium tunnels 1

- public areas

pro shops¹

NERTIA WIT HAMMERED TEXTURE Square Edge Tile 24" x 24" 20 colorways 6 colorways 1/4" SO available available (smooth back) Interlocking Tile 24" x 24" (23" x 23" net) 1/4" SO SO SO SlideLock® Tile 24" x 24" net (studded back) 3/8" SO SO SO

Matching accessories available in solid colors (not skate and spike resistant).

For more detailed information regarding product features, installation, maintenance, specifications and case study installations, visit tarkett.com.

Interlocking tiles may be used where lightweight rolling loads are present.

Rolling traffic is not permitted over SlideLock tile.

Note: SlideLock requires different maintenance than Square Edge and Interlocking profiles

SO = Special Order

for wet areas

 correctional facilities daycare centers assembly and

production areas³

•

na® lized")lio®	Solid Colors
)	SO
)	SO
)	SO

¹ Specify Triumph Square Edge and Interlocking for ice skate blade and spike traffic

² Specify Square Edge and Interlocking

³ Inertia is not oil and grease resistant



TRIUMPH / INERTIA[®] - STANDARD SPECKLED





49 Beige WB *

LB2 Great Plains WB

LB4 Mottled Egg WG 24 Grev Haze WG *


29 Moon Rock WG *

LD7 Lunar Explorer WG



LE4 Log Cabin CB 80 Fawn CB *

KJ6 Grey Area CG 38 Pewter CG * LC7 Best Seller CG 23 Vapor Grey CG



LB9 Rainstorm WG Charcoal WG



KJ9 Forestation 86 Hunter Green



KL3 Bright Sun

KJ2 Tidal

58 Windsor Blue *

KL2 Passion TB6 Flame











LB8 Vortex B 40 Black B *

KN3 Bluer

VN5 The Blues *

TRIUMPH / INERTIA® - STANDARD MESTO

KJ8 Strong Blue

VN5 The Blues 7



KN6 Plainer WB

49 Beige WB *






KJ1 Marino

18 Navy Blue >

KN2 Expedition WG 29 Moon Rock WG *



20 Charcoal WG *



KN4 Tree Top 86 Hunter Green *



For more than 140 years, Tarkett has been committed to the design of great spaces. For us, this means making conscious choices every day for human and planet health, ensuring that present and future generations are able to thrive. We call this philosophy Tarkett Human-Conscious DesignSM. And it drives everything we do.

Cradle to Cradle principles guide our eco-design approach on the basis of five criteria: material health, product circularity, renewable energy and climate requirements, water stewardship, and social fairness.

At Tarkett North America, we're committed to using healthier materials, protecting indoor air quality, and reducing our carbon emissions by 30% by 2030. Our goal is to establish a circular economy by designing out waste and pollution, keeping materials in use, and regenerating natural systems-for the good of people and planet.

Our commitment is founded on three central pillars:



CIRCULAR ECONOMY Closing the loop on waste, preserving our planet's natural resources and reducing the impact on climate change.



GOOD MATERIALS Subjecting ourselves to relentless scientific scrutiny and offering radical transparency about our products.



Cradle to Cradle Certified® is a certification mark licensed by the Cradle to Cradle Products Innovation Institute.





SPECKLED

KJ8 Strong Blue



MESTO KN3 Bluer

It's all about teamwork. For optimal coordination, Triumph and Inertia® are available in

identical colorways. Choose from 20 Standard Speckled and 6 Mesto® colorways, all in


our hammered texture. Solid colors are also available by special request.



KJ3 Brownout




INDOOR AIR QUALITY A commitment to your health and well-being. Creating healthy indoor spaces with the highest standards of Indoor Air Quality.

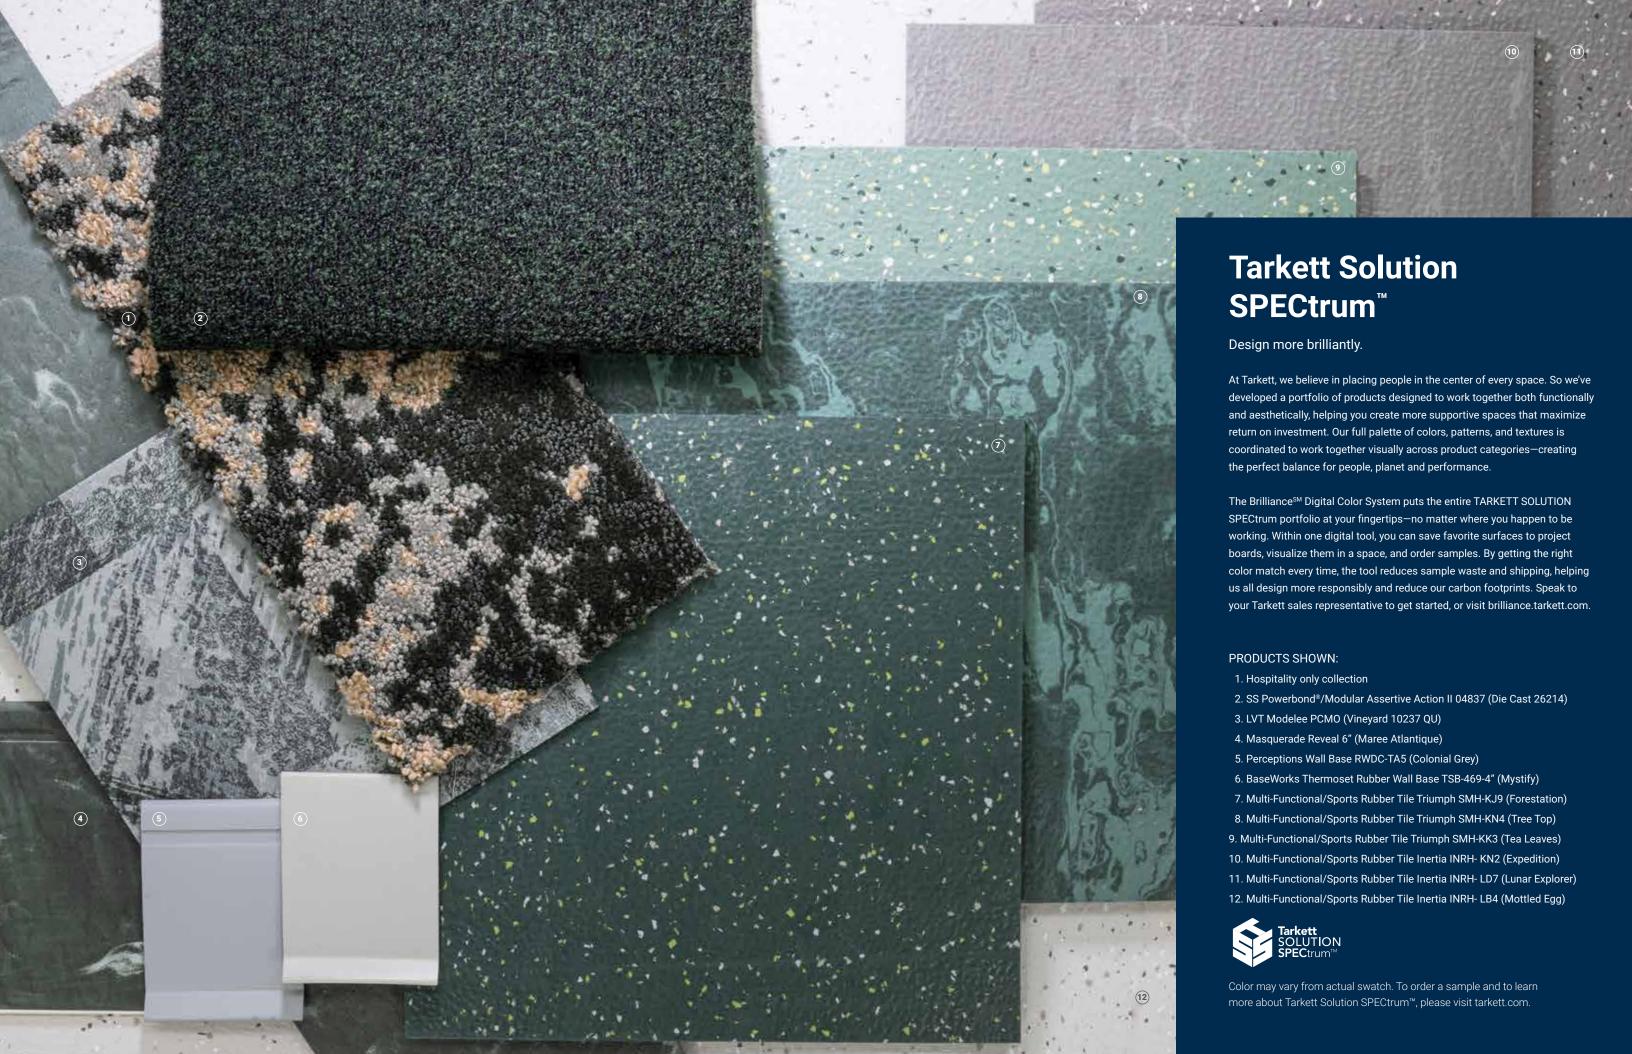

TRIUMPH INERTIA RUBBER SPORTS FLOORING					
TECHNICAL DATA	STANDARDS	TRIUMPH	INERTIA		
Type of Floor Covering	ASTM F 1344	Rubber Floor Tile	Rubber Floor Tile		
Classification – Tile	ASTM F 1344	Class 1-A and 1-B	Class 1-A and 1-B		
Total Thickness	ASTM F 373	3/8" (9.5 mm)	1/4" (6.35 mm)		
Static Load Limit	ASTM F 970	250 psi, ≤ 0.005 inches	250 psi , ≤ 0.005 inches		
Impact Sound Transmission	ASTM E 492	59 (IIC)	57 (IIC)		
Resistance to Heat	ASTM F 1514	ΔE ≤ 8.0	ΔE ≤ 8.0		
Hardness	ASTM D 2240	> 70 Shore A	≥ 85 Shore A		
Dimensional Stability	ASTM D 2199	≤ 0.15%	≤ 0.15%		
Abrasion Resistance	ASTM D 3389	< 1g loss after 1,000 cycles	< 1g loss after 1,000 cycles		
Slip Resistance	ASTM D 2047	SCOF ≥ 0.5	SCOF ≥ 0.5		
Flame Resistance	ASTM E 648	Class 1	Class 1		
Smoke Density	ASTM E 662	< 450	< 450		
Chemical Resistance	ASTM F 925	Good	Good		
Tile Size	ASTM F 2055	Square Edge Tile 24" x 24" (61 cm x 61 cm) Standard Interlocking Tile 24" x 24" (23" x 23"/ 58 cm x 58 cm net) Standard SlideLock Tile 24" x 24" (61 cm x 61 cm) Standard	Square Edge Tile 24" x 24" (61 cm x 61 cm) Standard SlideLock Tile 24" x 24" (61 cm x 61 cm) Standard		
Quantity (per carton)		3 tiles 12 sq. ft. (1.1 m ²)	4 tiles 16 sq. ft. (1.49 m ²)		
Weight (per carton)		36 lbs (16.3 kg)	34 lbs (15.4 kg)		
Colors		26	26		
Surface Textures		Hammered	Hammered		
Please visit tarkett.com for the	most updated speci	fications, and installation, cleaning and mainten	ance instructions.		

How to Order: Product Code - Color Number - Thickness (Example: INRH - 49 - 1/4')

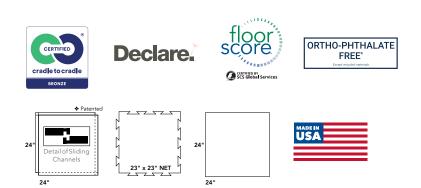

 Tarkett North America

 30000 Aurora Rd

 Solon, OH 44139

 800.899.8916

 tarkett.com