

WETROOM CONCEPT ACCESSORIES

Tarkett provides a wide range of accessories for your wetroom installation.

DRAINS AND GRATINGS

DRAINS

Horizontal



FREJA 50
Ø150 1416 002



MINIMAX S-SERIES
Ø215 1416 013



PVC SIPHON FOR RENOVATION - MINIMAX 40
Ø130 1416 010



PVC SIPHON FOR RENOVATION - MINIMAX 50
Ø130 1416 006



SIPHON ODEN 75
Ø150 1416 015 **NEW**

DRAINS

Vertical



SIPHON BRAGE 75
Ø150 1416 005



SIPHON BRAGE 50
Ø150 1416 004



SIPHON DUSCH BRUNN
Ø150 1416 001



STAINLESS STEEL SIPHON (INOX 40)
Ø130 1416 007



SAFE
Ø150 1416 014

DRAINS

Rectangular - Dimensions : Length: 600, 900mm / Width: 130mm

When choosing a gully, three factors to consider are drain type (horizontal or vertical), diameter and outflow.



Side low outlet Siphon Vinyl Plus
Chess Ø50 side low 900mm 26697 101



Side outlet Siphon Vinyl Plus
Chess Ø75 side low 600mm 26689 101



Side outlet Siphon Vinyl Plus
Chess Ø50 side low 600mm 26687 101

GRATINGS

Stainless Steel




Drop
Ø130 26651 001
Ø150 26650 001
GRID SR 150 26652 002



Art Deco
Ø130 1417 013
Ø150 1417 010

White PVC



Drop
Ø150 26657 001



Standard
Ø150 1417 001



Hole for pipe
Ø130 26659 001

Matt Black PVC **NEW**



Drop
Ø150 26657 002

Water Traps



Brage/Oden water trap
Ø125 1417 005



Freja water trap
Ø130 1417 007



Duschbrunn water trap
Ø130 1417 008



Nood water trape (all drain)
Ø130 1417 024 **NEW**



Nood water trap minimax 40
1417 019

The NOOD Water Trap

The NOOD is a dry water trap that opens on contact with water and closes automatically afterwards. It protects against bad odours and bacteria and is ideal for use in hospitals.

Purus Accessories



Support
1417 004



Clamping ring: 150mm
1417 002



Locking set - stainless-steel grating
1417 006



Locking set - stainless-steel grating, safety-rated
1417 021



Purus white knife
diam. 150 1417 003



Purus Blue knife
diam. 130 1417 012
Extra Blades x5 1417 016

COVER FORMERS

■ **PA15**
For enhanced hygiene in wall corners


PA 15 (15x15 mm) / ref. 2661 7001

■ **PA20 & PA30**
For added strength at the most vulnerable point between wall and floor

PA 20 (20x20 mm) / ref. 1441 000
PA 30 (30x30 mm) / ref. 1442 000

■ **PA 20 SA **NEW****
Self-adhesive cover former for quicker installation

PA 20 SA (20x20mm) / ref. 1441001



NEW ■ **Aquasens tape** Pre-cut double sided tape for coving - 25 m length 160 mm height - ref. 2666 7000

THRESHOLD TRANSITIONS

■ Available in flexible rubber (RTS)

■ Available in rigid PVC (PTS)



Grey
RAL: 7036
NCS: 4500-N



White
RAL: 9003
NCS: 0502 R




Dark grey
RAL: 7016
NCS: 8005 B



Beige
RAL: 1011
NCS: 3040 Y

References

RTS  Available in one colour Grey / ref. 1255 748

PTS  Available in three colours Grey / ref. 2666 4001
Dark grey / ref. 2666 4002
Beige / ref. 2666 4004

Flexible Threshold (WTS)


■ Flexible

■ Can be welded

■ Easier for wheelchairs

■ Reduce door fitting => reduce installation time

■ All the advantages of PVC and rubber without the drawbacks



PVC FLEXIBLE THRESHOLD WTS1 **NEW**
Available in one colour Grey Clay
L 2m x W 7/12 cm x H 1 cm
ref. 26666 000



Grey Clay
RAL: 7004
NCS: 2502-Y

FLEXIBLE JUNCTION PROFILES


Designed to ensure a perfect watertight seal between coved floor covering and wall covering.

NEW **PJ 30 SA (30 mm) - Junction profile**
30 Self Adhesive / ref. 1418 003

References

PJ 30 (30 mm) / ref. 1418 001

NEW PJ 30 SA (30 mm) - Junction profile
30 Self Adhesive / ref. 1418 003




NEW FOCUS ON OUR NEW COVING INSTALLATION SYSTEM


- Unique, market-first solution
- Faster, hassle-free installation
- Glueless and odourless
- No need for special tools
- No mess
- No added costs

Junction profile PJ 30 in self-adhesive **NEW** ref. 1418003

Pre-cut double sided tape **NEW** ref. 26667000

Coving profile PA 20 in self-adhesive **NEW** ref. 1441001

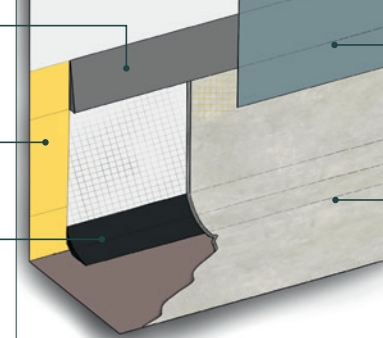

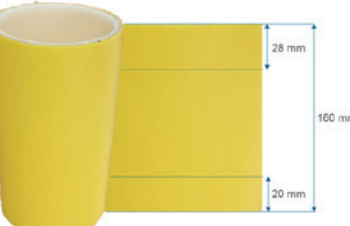

Pre-cut double sided tape 160 mm - 26667000



A GUIDE TO ACCESSORIES

When choosing a gully, three factors to consider are drain type (vertical or horizontal), diameter and outflow. These factors are determined by the architect based on customer needs and sub-floor type, whether for renovation or new build.

Drain	SAP code	Diameter (mm)	Features	Integrated accessoires	Other compatible accessories in the range	SAP code
	FREJA 50 - HORIZONTAL	1416002	150	Bigger gully with 50mm outlet. General purpose with no specific site constraints other than the side outlet.	Included: Stainless-steel grating - Drop 150 Stainless-steel grating - Art Deco 150 Stainless-steel grating - SR 150	Plastic grating - Standard 150 1417001 Plastic grating - Drop 150 White/Black 26657001 / 26657002 Plastic grating - Hole for pipe 150 26660001 Inox grating - Drop 150 26650001 Inox grating - Art deco 150 1417010 Inox grating - SR 150 26652002 Water Trap RAN Plastic 1417005 Purus knife 150 1417003 NOOD Water Trap 1417024 Clamping ring 1417002
	BRAGE 75 - VERTICAL	1416005	150	75mm diameter outlet. Maximises flow for vertical outlets.	Included: Clamping ring 1417002, plastic grating 26657001 and a standard water trap	Plastic grating - Standard 150 1417001 Plastic grating - Drop 150 White/Black 26657001 / 26657002 Plastic grating - Hole for pipe 150 26660001 Inox grating - Drop 150 26650001 Inox grating - Art deco 150 1417010 Inox grating - SR 150 26652002 Water Trap RAN Plastic 1417005 Purus knife 150 1417003 Nood Water Trap 1417024 Clamping ring 1417002
	BRAGE 50 - VERTICAL	1416004	150	50mm diameter. Compact design ensuring fast flow for vertical outlets.	Included: Clamping ring 1417002, plastic grating 26657001 and a standard water trap	Plastic grating - Standard 150 1417001 Plastic grating - Drop 150 White/Black 26657001 / 26657002 Plastic grating - Hole for pipe 150 26660001 Inox grating - Drop 150 26650001 Inox grating - Art deco 150 1417010 Inox grating - SR 150 26652002 Water Trap RAN Plastic 1417005 Purus knife 150 1417003 NOOD Water Trap 1417024 Clamping ring 1417002
	STAINLESS STEEL SIPHON (INOX 40) - VERTICAL	1416007	130	For use in secure environments, such as prisons or psychiatric hospitals.	Included: 1 drain + 3 screws for the clamping ring + 1 screw to lock the grating + grating	NA
	DUSCH BRUNN - VERTICAL	1416001	150	The outlet must be pushed into the gully. Extremely compact design. Incompatible with NOOD water trap.	Included: Clamping ring 1417002, plastic grating 1417001 and water trap 1417008	PVC Grating Drop 150 White/Black 26657001 / 26657002 Plastic grating - Hole for pipe 150 26660001 Inox grating - Drop 150 26650001 Inox grating - Art deco 150 1417010 Inox grating - SR 150 26652002 Purus knife 150 1417003 Clamping ring 1417002
	NEW ODEN 75 - HORIZONTAL	1416015	150	Maximises flow for horizontal outlets.	Included: Grating Water Trap Automatic clamping ring	Plastic grating - Standard 150 1417001 Plastic grating - Hole for pipe 150 26660001 Inox grating - Drop 150 26650001 Inox grating - Art deco 150 1417010 Inox grating - SR 150 26652002 Water Trap RAN Plastic 1417005 Purus knife 150 1417003 NOOD Water Trap 1417024 Clamping ring 1417002
	PVC DRAIN FOR RENOVATION - MINIMAX 4	1416010	130	Smaller format without water trap. Ideal as part of a system with a separate drain connected to a main outlet.	Included: Clamping ring 1417018 Plastic grating 26658001	Purus knife 130 1417012 Plastic grating - Hole for pipe 130 26659001 Inox grating - Drop 130 26651001 Inox grating - Art deco 130 1417013 NOOD Water Trap for Minimax 1417019
	PVC DRAIN FOR RENOVATION - MINIMAX 50	1416006	130	Reduced height perfect for where space is limited, such as in renovations.	Included: Clamping ring 1417018, Plastic grating 26658001 Nood water trap 1417019	Plastic grating - Standard 130 26659001 Inox grating - Art deco 130 1417013 Inox grating - Drop 130 26651001 Purus knife 130 1417012
	MINIMAX S-SERIE	1416013	215	Solution solving. Ideal for renovation project. Save time in floor preparation and installation	Included: Inox-steel clamping ring No gratings included.	Grating S-Series Minimax plastic 26660002
	SAFE	1416014	150	Compact design with small outlet. Can withstand freezing temperatures, useful in unheated spaces. Ideal as an extra outlet in bathrooms and wetrooms. Not for use in showers or other high-outflow environments.	Included: Odour trap Automatic clamping ring Grating	Clamping ring 1417002

TOOLS REQUIRED

CODE	TYPE OF TOOL	FLOOR	WALL	JANSER	ROMUS
1	Hot air gun	X	X	226 110 000	95 047
2	Corner roller	X	X	224 400 123	95 135
3	Wall groover or adjustable groover		X		95 125
4	Guide rule		X	262 601 000	91 580
5	High speed hot air nozzle -	X	X	224 700 300	95 030
5	High speed nozzle	X	X	224 400 300	
5	Tarkett super high speed welding nozzle (Ref. 1258 012)		X		
6	Quarter moon knife	X	X	262 621 000	95 140
7	Adjustable trimmer	X	X	262 625 000	95 150
8	Traditional blowtorch	X	X	224 962 000	95 074
8	("welder")	X	X	224 818 000	95 080
9	or special wall seam plane (studded flooring)	X	X	262 626 500	95 172
9	or trimming tool slim		X	262 609 100	
9	or "slim" or "trim" trimmer		X	262 609 300	
10	90° angle template	X			95 445
10	and flat angle template for coving	X			95 446
11	Scriber or		X	222 430 000	95 430
11	combined scriber/markings gauge		X	262 130 000	
12	Swan neck nozzle or	X		224 810 040	95 039
12	Corner finishing nozzle	X		224 810 050	
13	Trimming gouge	X		262 610 000	95 160
14	Cork wedge / squeegee	X	X	262 380 000	93 145
15	Stainless-steel trowel		X		93 150
16	Mozart knife	X	XX	262 636 000	95 130

SPECIAL TOOLS

FOR GROOVING: NEW


Master turbo groover

ref. 1258100

Master turbo groover (2pcs)

ref. 1258101

- Fast grooving
- Secure grooving: consistent depth of grooving regardless of pressure applied

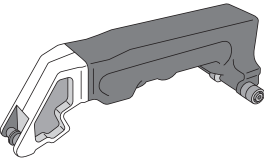


FOR WALLCOVERING NEW

WELDING:

Turbo detail nozzle

ref 1258102

- Easy, safe wall welding
- No risk of burning the wall covering

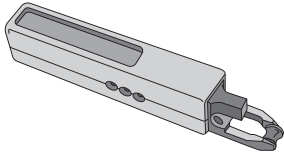

FOR HORIZONTAL NEW

INSTALLATION OF WALLCOVERING:

Wall unroller

ref. 1562010

- Fast, safe installation
- Up to 20% less installation time
- Less muscle fatigue for installers



RECOMMENDED ADHESIVES

Tarkett regularly tests the main adhesives on the market to check that they are compatible with its products. The manufacturer is responsible for the quality of the adhesives and the installer for their use according to the manufacturer's instructions.

Acrylic adhesive should be applied using a fine-toothed spatula TKB A4 (d.p.t 200 . 250 g/m²) for Aquarelle Wall HFS and TKB A2 (d.p.t environ 300 g/m²) for Multisafe Granit, Granit Safe. T and Multisafe Optima. Consideration should be given to the local climate in relation to tack time, drying etc.

