


# Tarkett know-how at the service of marine

Celebrating 140 years of expertise, Tarkett has established itself as a renowned global leader in the flooring industry. Our unwavering commitment to excellence and worldwide presence allows us to offer you unparalleled products and comprehensive support tailored to your requirements.

With a focus on bespoke solutions, Tarkett covers every aspect from design to customer service, ensuring that each Marine project receives the utmost attention. We understand the unique demands of the Marine sector and proudly provide a diverse range of flooring solutions including Carpet, LVT, and Linoleum.

For over three decades, we have been a trusted partner in the Marine industry, consistently exceeding industry standards. Our collaborations with esteemed companies such as Princess Cruises, Carnival Cruises Group, and MSC Group exemplify our dedication to delivering comprehensive services.

Ultimately, our aim is to become your go-to partner for all your Marine flooring needs. Count on us to provide the expertise, quality, and support necessary for your success.

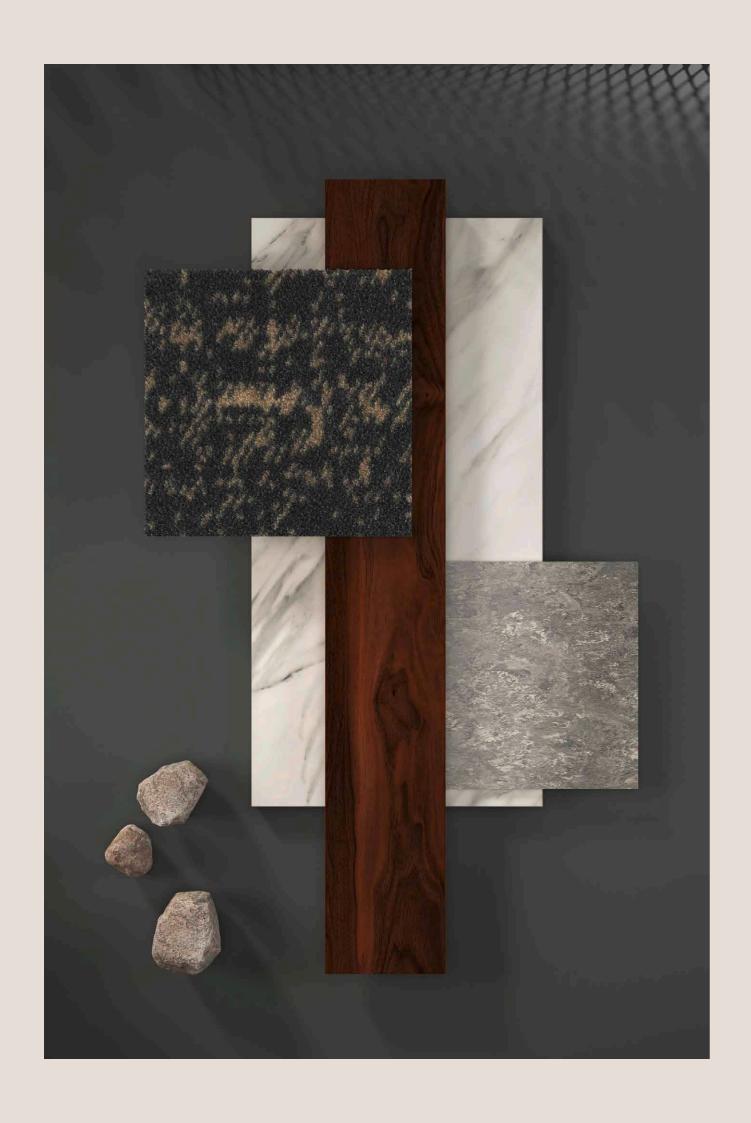

# The ultimate hard and soft flooring solution provider





Embark on a journey where spaces come to life.




We skillfully merge resilient and carpet flooring, offering a seamless blend of functionality and style, ranging from standard options to tailor-made solutions.








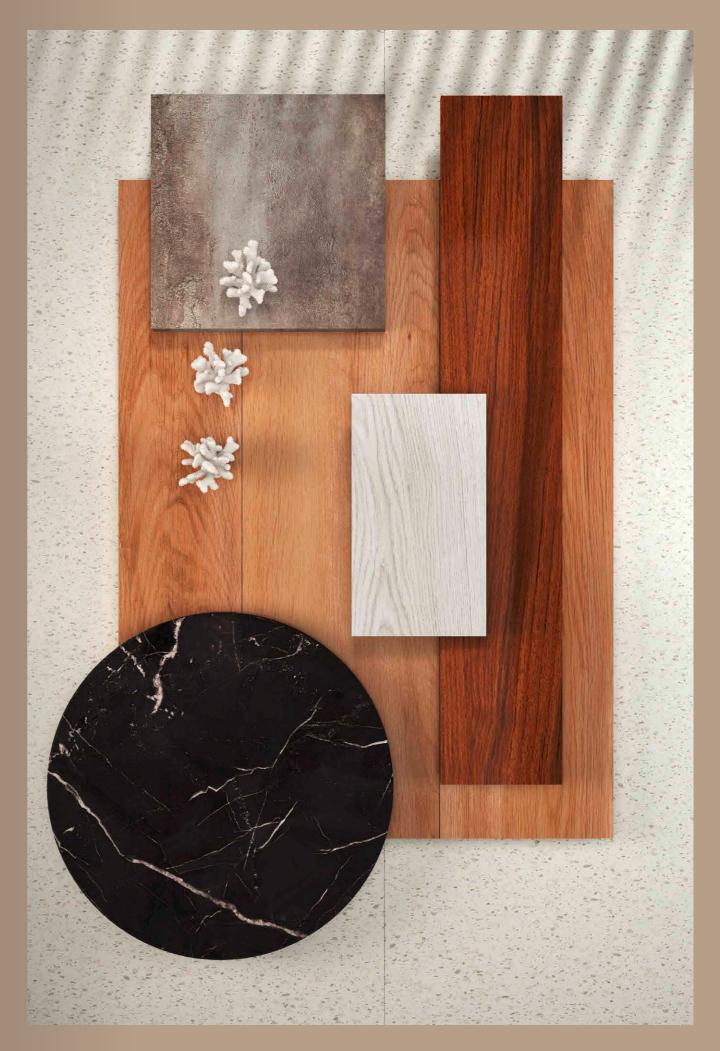

# Create an incredible and memorable experience

iD Inspiration Marine is a collection of premium Luxury Vinyl Tiles designed specifically to bring authentic and realistic styles to your ships.

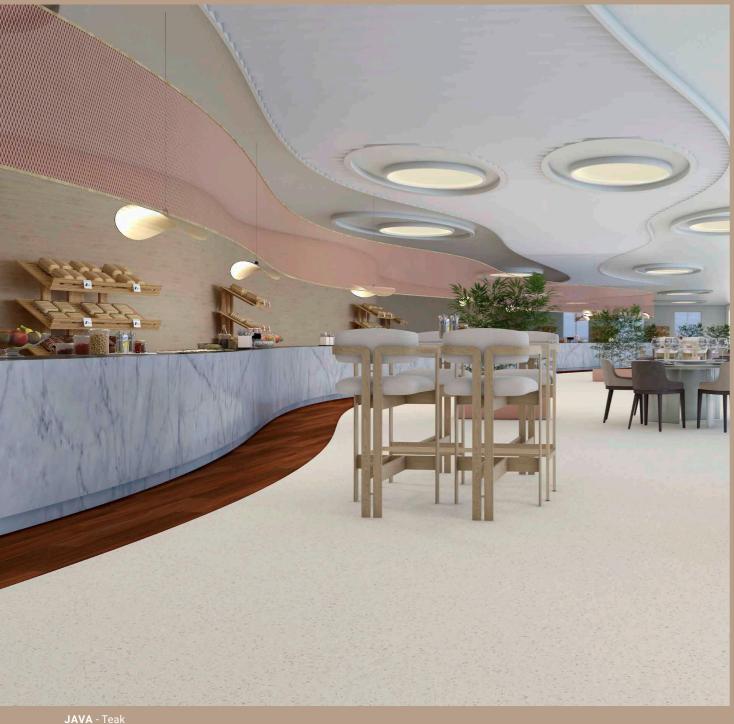

## 16 styles (in stock & made-to-order)

Create a warm and inviting atmosphere in your cabins with our range of **classic** and **elegant wood designs**. Indulge in the timeless charm, reminiscent of a cozy home setting. Stand out from the crowd by incorporating our **cement, terrazzo, and marble** styles into bars, restaurants, and all public areas of your ships.

## PUR surface treatment


Experience the ultimate realism with our PUR matt finish and high-definition printing, which provide a visually stunning representation of the natural materials.

## CUSTOMIZE your ambiance

Our collection offers compatibility for mixing and matching different styles.

Unleash your creativity as you combine various styles and designs, allowing you to create unique zones and dynamic spaces. Complete the ambiance of your vessel with our range of additional decorative accessories.

## 3 formats

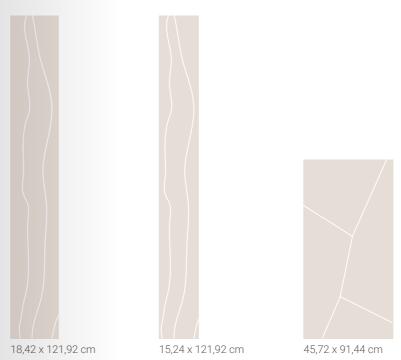


# Meeting the highest industry safety standards



iD Inspiration Marine is meticulously designed to cater the distinct needs of marine settings, adhering to the most stringent industry standards for fire safety. It is certified as per IMO/ MED regulations (IMO Part 2 /5 Compliant).

Furthermore, iD Inspiration Marine boasts an R10 slip resistance rating, providing maximum security and stability for everyone on board.

Rest assured that our IMO-certified flooring solutions guarantee the utmost safety, comfort, and style for your cruise ship.

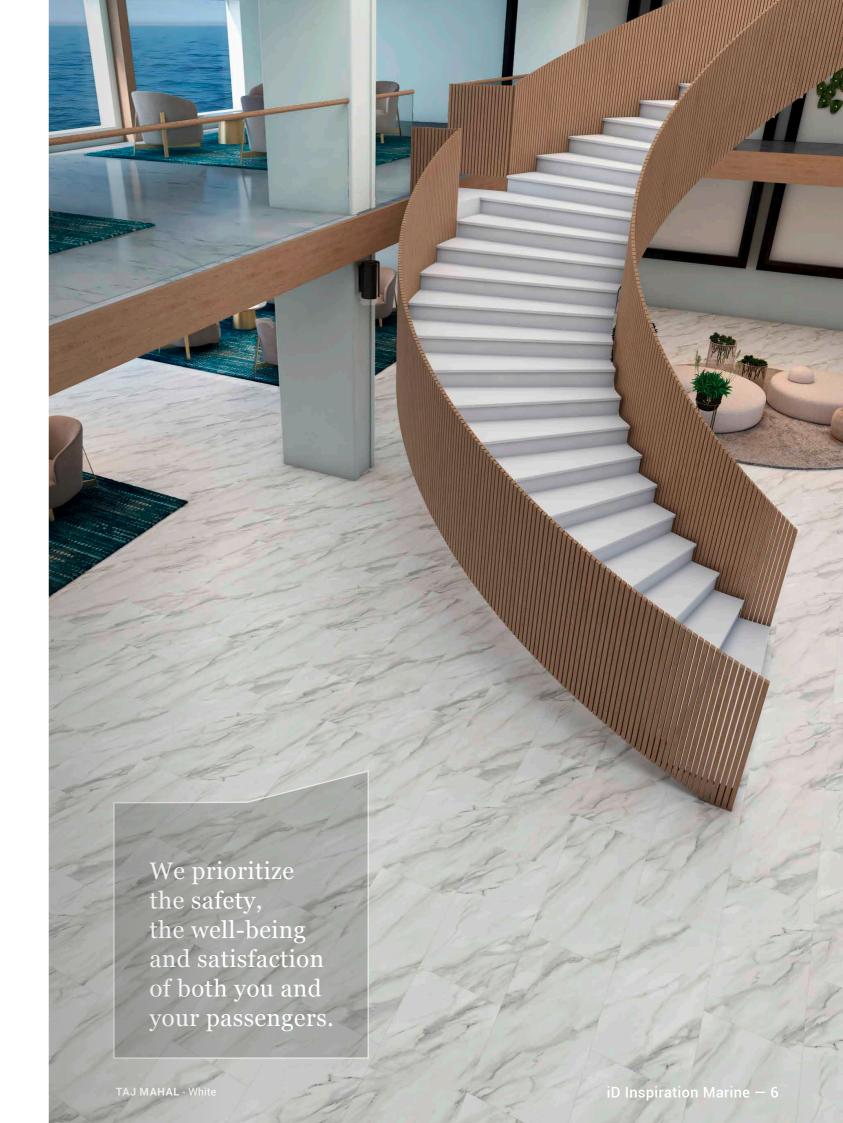



# Streamline your experience


We take pride in offering a wide selection of décor options that cater to every taste, with the added benefits of Luxury Vinyl Tile: its exceptional durability and effortless maintenance.

These qualities make LVT an ideal choice for cruise ships, where longevity and ease of upkeep are of paramount importance.



## Durable. Reliable. Lasting.

- 0.55 mm wear layer ensuring high-traffic resistance and timeless beauty for an extended life-span.
- Proven anti-static and scratch-resistant properties
- . 10-year commercial warrant



## Suitable for wetrooms

- Waterproof collection, making it ideal for bathrooms in cabins and any wet areas.
- Slin resistance R1



## Glue down

- A unique and customized appearance through the combination of various side-by-side designs.
- Enhanced stability: strong bond to subfloor, no shifting or movement over time.



## Hassle-free solution

- PUR surface treatment guarantees an easy maintenance and provides excellent stain resistance
- . Simple cleaning with neutral detergent and warm water

# Design overview

## 16 great designs

## 3 formats



## **Planks**






# **Tiles**









# Experience a world of wood-inspired.









# Malmö

Are you looking for tranquility and calm?

Discover the peaceful ambiance of Malmö and the serene Nordic style it offers. Immerse yourself in the elegance of sober oak flooring, featuring gentle and airy hues that evoke the cool softness of Scandinavia.



Dimensions: 18,42 x 121,92 cm









Accessories recommendation (see more details p 24)

Light Natural Oak Skirting: 26646069 Feature stripes: Black 1421001

**Grey Oak** Skirting: 26646015 Feature stripes: Silver 1421002

Sand Oak

Skirting: 26646096

Feature stripes: Eggshell 1421013









# **Tortuga**

In the Tortuga design, nature's embrace is unmistakable, as time and natural elements intertwine. This flooring, with its natural shade and weathered silvery hue, carries the spirit of resilience. True to its name, it invites you on a journey of pirate dreams and hidden treasures.


Driftwood

260058016

Accessories recommendation (see more details p 24)
Skirting: 26646010

Skirting: 26646010 Feature stripes: Copper 1421012 Dimensions: 18,42 x 121,92 cm



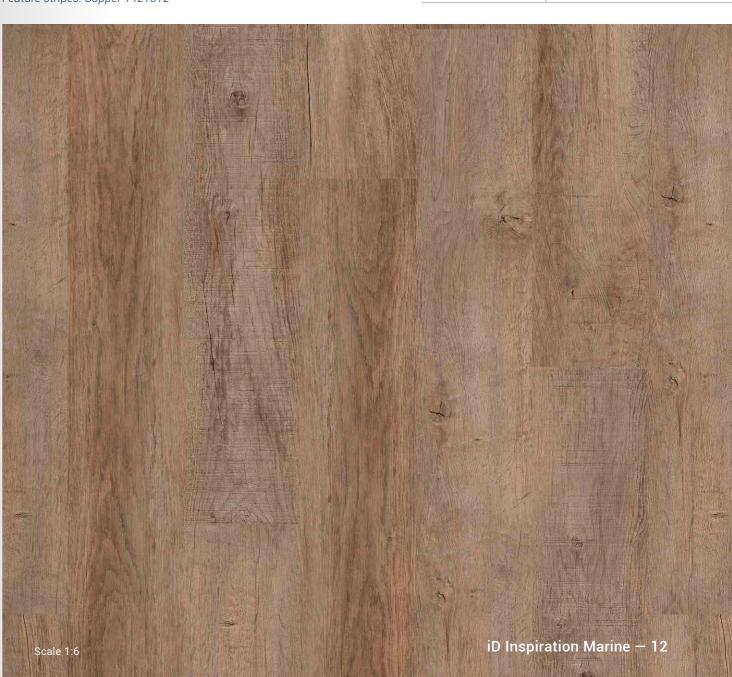


## **Nantes**

A short stopover at the shipyards!

Nantes is showcasing its finest parquet flooring. Delicate rusticity and natural colours echo the quintessence of tradition and luxury "à la française"!



Dimensions: 18,42 x 121,92 cm



Golden Oak

260058013



**Natural Oak** 

260058014



**Blond Oak** 

260058015



Accessories recommendation (see more details p 24)

**Golden Oak** Skirting: 26646028 Feature stripes: Copper 1421012

Natural Oak Skirting: 26646028 Feature stripes: Dark Grey 1421009

Blond Oak

Skirting: 26646026

Feature stripes: Black 1421001







Transport yourself back to the awe-inspiring moment when English navigators first encountered the pristine lands of Virginia.


They were left speechless by the majestic splendor of the renowned Virginia walnut.


Walnut

260059008

Accessories recommendation (see more details p 24) Skirting: 26646063 Feature stripes: Gold 1421003 Dimensions: 15,24 x 121,92 cm

2,5 mm \_

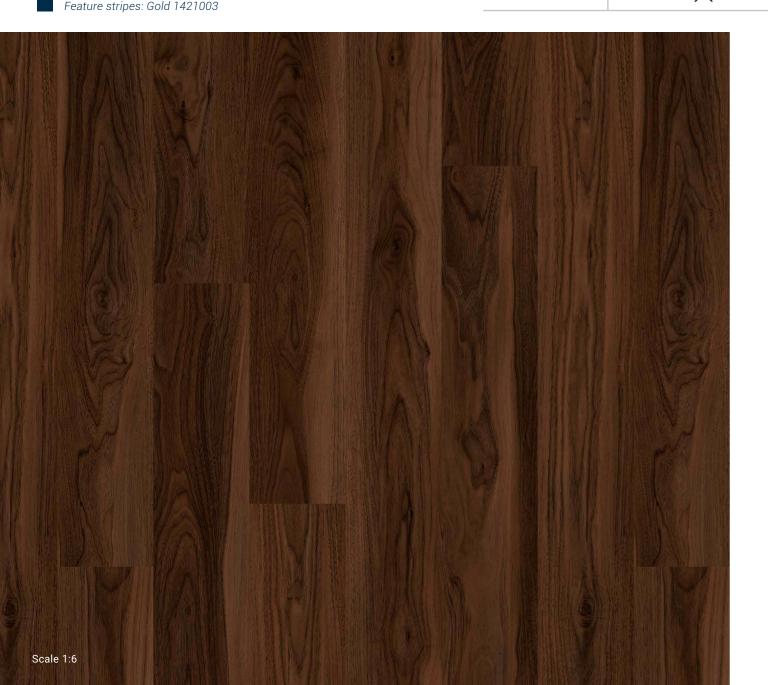

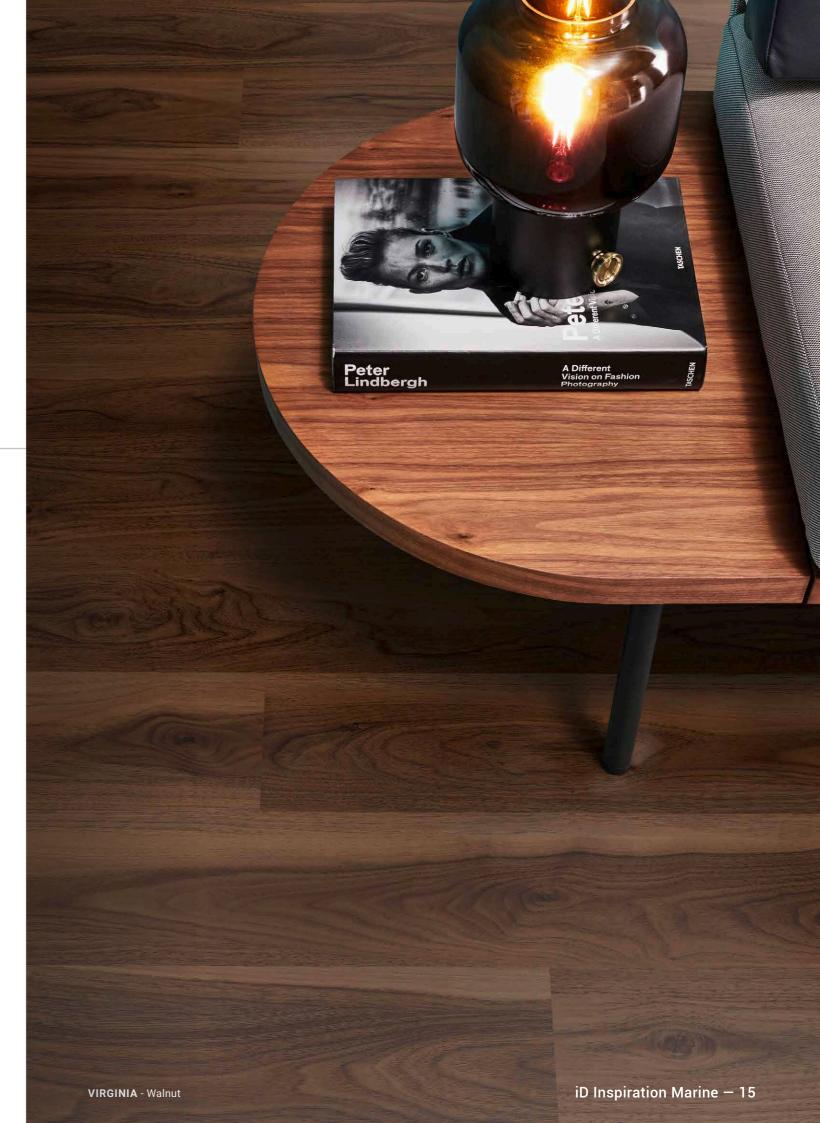



## Java


The cultural richness of Indonesia embodied within our design Java! Enveloped in lush forests, the island of Java proudly holds the title of the world's largest teak producer.

Renowned for its exceptional quality, the "djati songgoh" teak, favored by the navy, is meticulously cultivated here. Our Java design is a perfect illustration of this.

Teak 260059009

Accessories recommendation (see more details p 24) Skirting: 26646050 Feature stripes: Black 1421001 Dimensions: 15,24 x 121,92 cm



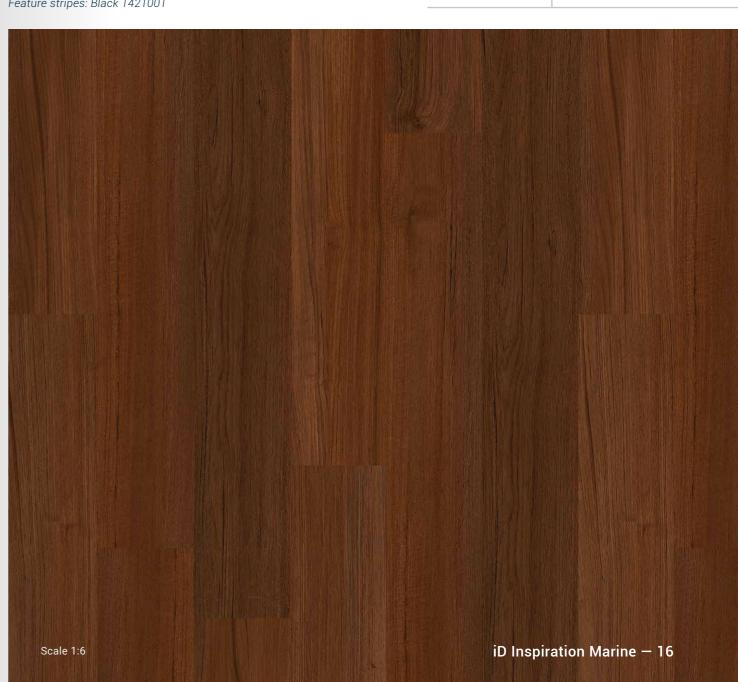

# Step into a world of stone-inspired elegance.

Step into a world of stone-inspired elegance. Each design transports you to a unique destination, from the majestic white marble of the Taj Mahal in India to the captivating allure of French Polynesian pearls embodied in Black Pearl. Uncover the vibrant essence of Cuba with La Habana and embrace the concrete elegance of Manhattan. Discover the love and beauty of Venice with San Marco, and delve into the rich industrial heritage of Liverpool. Let these stone-inspired designs bring the timeless beauty of nature and the richness of history into your cruise ship.



## Concrete

## **MANHATTAN**





Down **260057001** 

Sunset **260057002** 

## Marble

**TAJ MAHAL** 



White 260057003

**BLACK PEARL** 



Black **260057004** 

LA HABANA



Grege **260057005** 

## **Terrazzo**

SAN MARCO



Light **260057006** 

## **Metal Plate**

## **LIVERPOOL**




Rust **260057007** 

# Manhattan

Behold the essence of Manhattan!

The gateway to the Big Apple, Manhattan reveals its polished concrete, kissed by the clouds of dreams that have graced its streets. From sunrise to sunset, this design embodies the radiant glow of the sun casting its majestic light upon the island city.

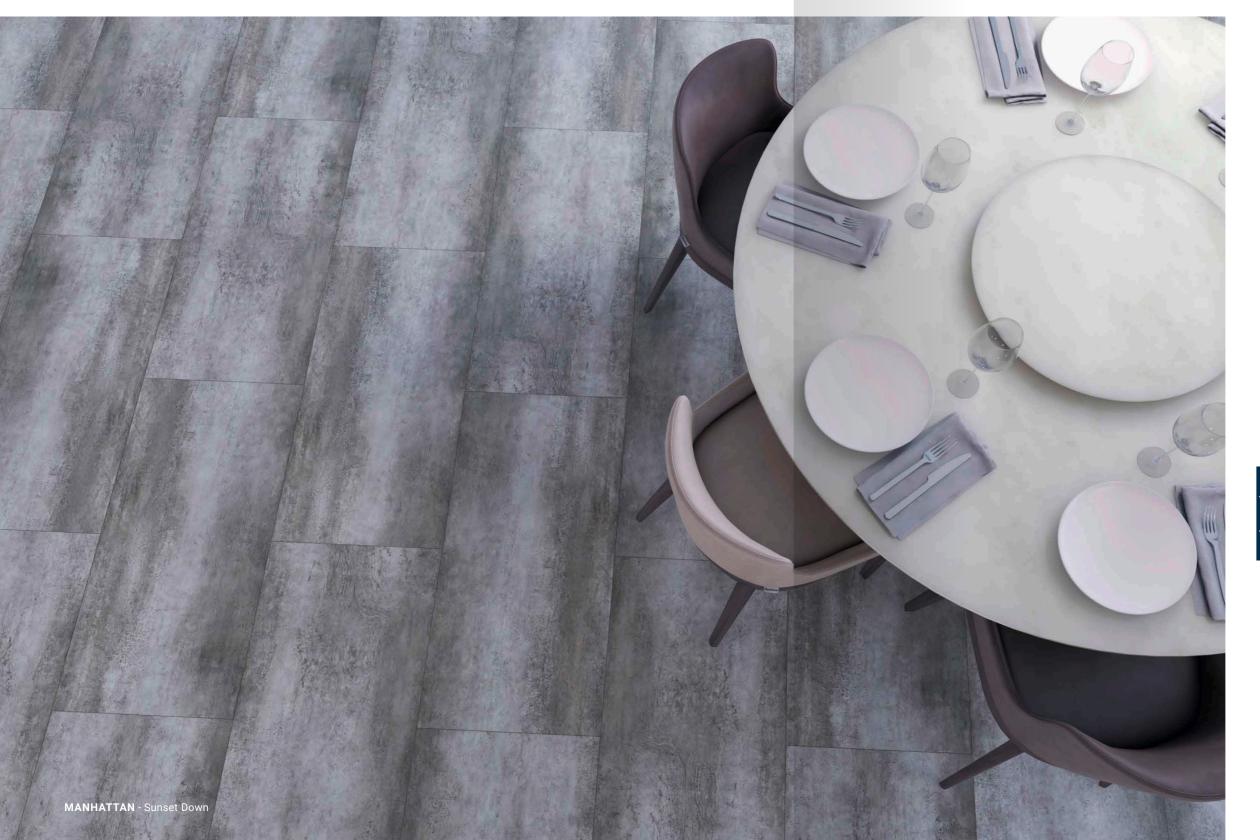

Dimensions: 45,72 x 91,44 cm

260057001 Down



260057002 Sunset



Accessories recommendation (see more details p 24)

**Down**Skirting: 26646033
Feature stripes: Dark Grey 1421009

**Sunset** Skirting: 26646032

Feature stripes: Silver 1421002





iD Inspiration Marine — 19



# Taj Mahal


Taj Mahal design will take you on a journey to the enchanting wonders of India!

Delight in the exquisite beauty of the delicate shades of white marble that are said to have stirred envy in Emperor Shah Jahan when he constructed the world-renowned mausoleum, the Taj Mahal. This remarkable design, inspired by the architectural masterpiece itself, exudes timeless elegance.

White 260057003

Accessories recommendation (see more details p 24) Skirting: 26646044 Feature stripes: Gold 1421003 Dimensions: 45,72 x 91,44 cm

2,5 mm

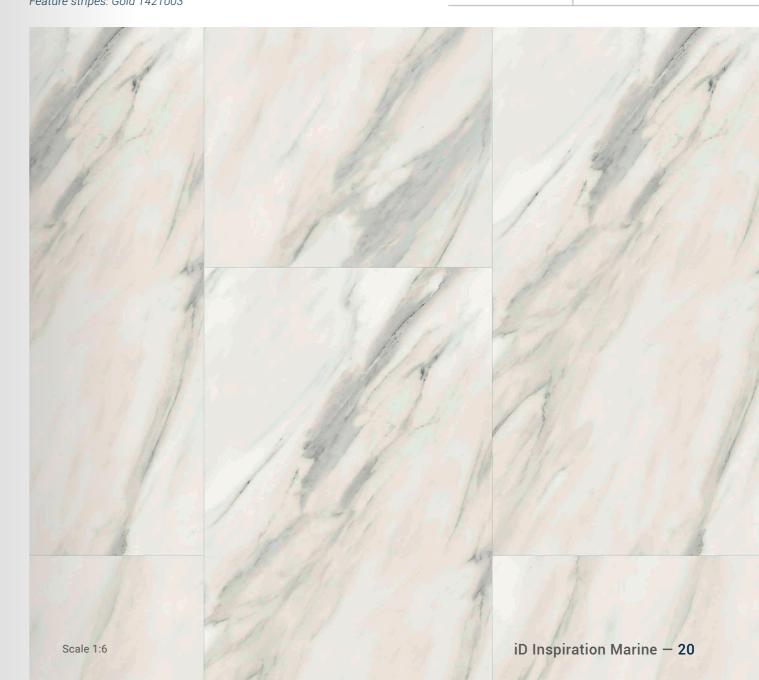

# **Black Pearl**


Unveil the allure of Black Pearl, inspired by the fabulous pearls of French Polynesia.


Turquoise waters, white sands, and elegant marbling are captured in this anthracite décor, reminiscent of fabulous Tahitian pearls.

Black 260057004

Accessories recommendation (see more details p 24) Skirting: 26646068 Feature stripes: Gold 1421003 Dimensions: 45,72 x 91,44 cm



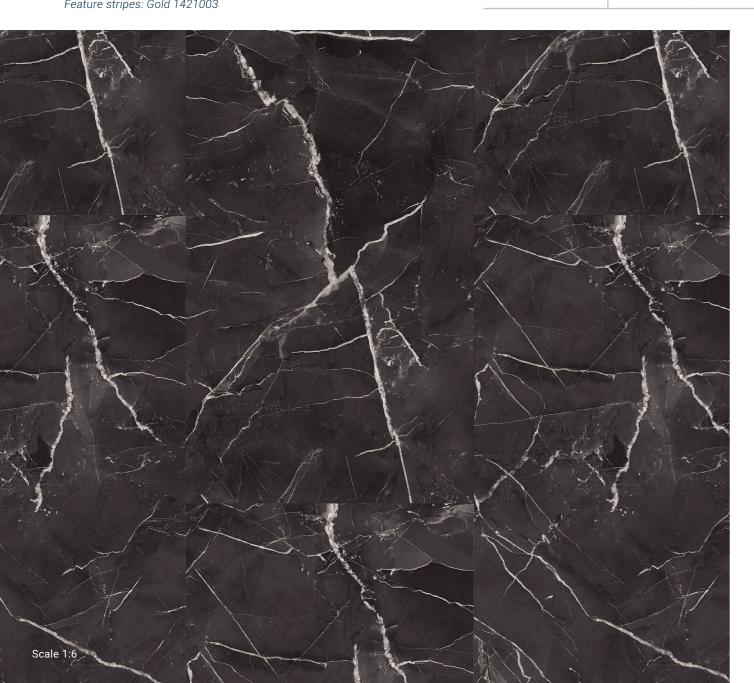

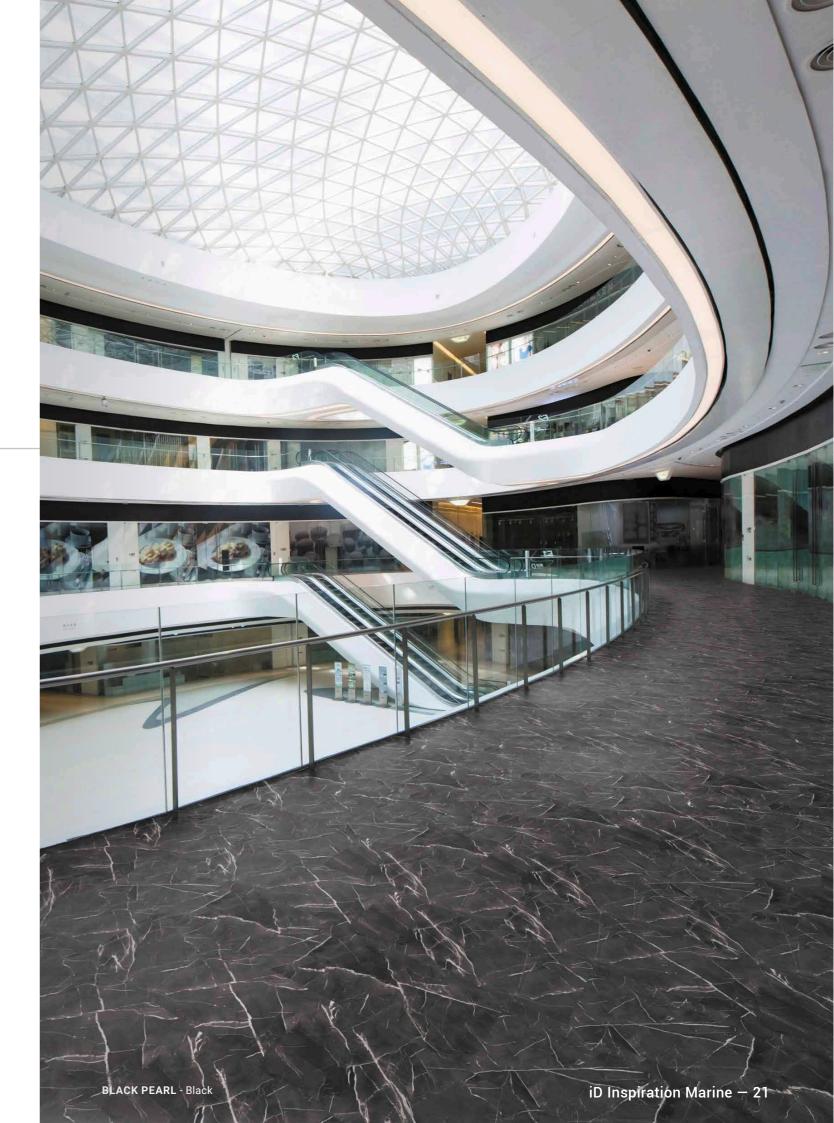



# La Habana

Get ready to submerge yourself in the vibrant essence of Cuba with our La Habana design!


260057005

Inspired by the majestic Spanish marble, Emperador, it recalls the captivating aroma of rum and tobacco, akin to Havana's golden era.

Grege

Accessories recommendation (see more details p 24) Skirting: 26646073 Feature stripes: Eggshell 1421013 / Taupe 1421007 Dimensions: 45,72 x 91,44 cm



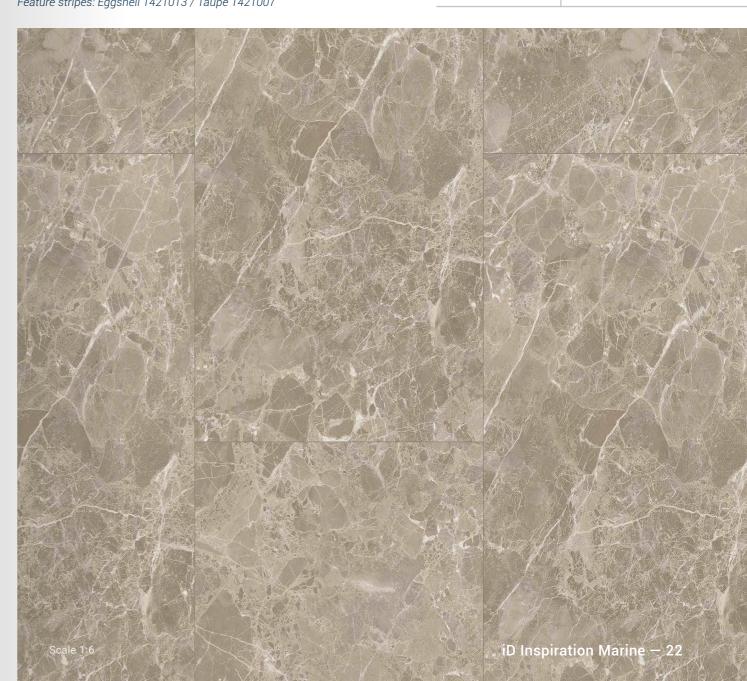

# San Marco

Welcome to the captivating world of Venice, where love and beauty intertwine! Our design pays homage to this city of the doges, renowned as the birthplace of Veneziano terrazzo. Join us in Piazza San Marco, where you can marvel at the magnificent terrazzo flooring of the doge's Palace, a true testament to venetian splendor.

Ligh


t 260057006

Accessories recommendation (see more details p 24) Skirting: 26640700 Feature stripes: Gold 1421003 Dimensions: 45,72 x 91,44 cm

2,5 mm



Scale 1:6 SAN MARCO - Light iD Inspiration Marine — 2

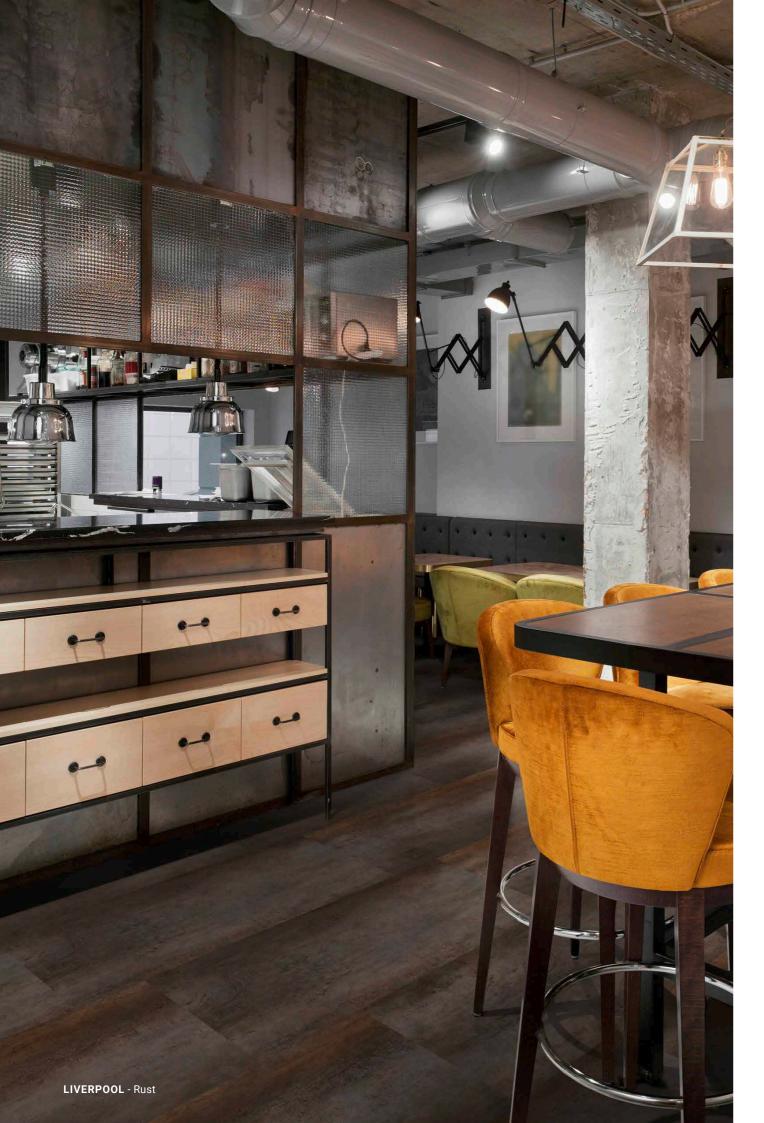


# Liverpool

Echos of industry are the essence of our captivating design Liverpool. Experience the metallic noise and billowing smokestacks that echo the city's industrial heritage. Just like this metal sheet, the floors of Liverpool have been traversed by generations of hardworking dockers, leaving behind a legacy of resilience and hard work. It serves as a poignant reminder of the port city's glorious industrial past.

Rust 260057007

Accessories recommendation (see more details p 24) Skirting: 26646025 Feature stripes: Black 1421001 / Copper 1421012 Dimensions: 45,72 x 91,44 cm



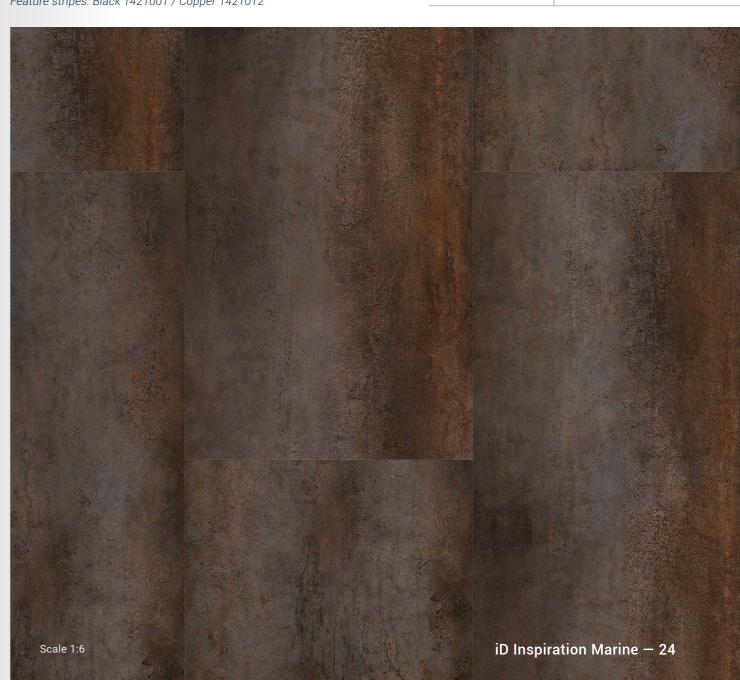

## Accessories


## **STOP TRANSITION PROFILES**

## **FLEXIBLE RAMP PROFILE FOR ROLLS**


Bendable aluminium profiles used to form a join between different types of floor coverings.

Can be manually curved on site to accomodate shaped and radius designs.

Select FT 2.5 height for compact floors. To be glued.



Silver	FT 2.5 mm		
	1456 000		
Delivery	10 units of 2.5 lm		





## **RECOMMENDED SKIRTINGS**

Decorative set-on skirtings with recommended colours to coordinate with your décors.

- Waterproof
- Total thickness: 10 mm
- Length: 1,95 m (2.02 for plain white)
- Items per box: 5 (10 for plain white)

Manhatan	Down	Patina Concrete Medium Grey	26646033	H 60 mm × L 1,95 m
Manhatan	Sunset	Patina concrete Light Grey	26646032	H 60 mm × L 1,95 m
Taj Mahal	White	Carrara Grande White	26646044	H 60 mm × L 1,95 m
Black Pearl	Black	Marquina Grande Black	26646068	H 60 mm × L 1,95 m
La Habana	Grege	Sediment Beige	26646073	H 60 mm × L 1,95 m
San Marco	Light	Plain White	26640700	H 60 mm × L 2,02 m
Liverpool	Rust	Oxide Black Steel	26646025	H 60 mm × L 1,95 m
Malmö	Light Natural Oak	Nomad Oak Linen	26646069	H 60 mm × L 1,95 m
Malmö	Grey Oak	Scandinavian Oak Medium Grey	26646015	H 60 mm × L 1,95 m
Malmö	Sand Oak	<b>Delicate Oak</b> Sugar	26646096	H 60 mm × L 1,95 m
Nantes	Golden Oak	Rustic Oak Warm Natural	26646028	H 60 mm × L 1,95 m
Nantes	Natural Oak	Rustic Oak Warm Natural	26646028	H 60 mm × L 1,95 m
Nantes	Blond Oak	Rustic Oak Beige	26646026	H 60 mm × L 1,95 m
Virginia	Walnut	Chestnut Smoke	26646063	H 60 mm × L 1,95 m
Tortuga	Driftwood	English Oak Brown	26646010	H 60 mm × L 1,95 m
Java	Teak	American Walnut Marron	26646050	H 60 mm × L 1,95 m

## LVT FEATURE STRIPS

Our selection of decorative strips for LVT enables you to add a unique touch to your luxury vinyl tile flooring pattern. **Total thickness:** 2 mm

Black	1421 001
Silver	1421 002
Gold	1421 003

Copper	1421 012
Eggshell	1421 013
Taupe	1421 007

Dark Grey	1421 009
Royal Blue	1421 011
Red	1421 010

## Installation


### **IMPORTANT!**

- Make sure all specifications and instructions are followed carefully.
- Contact your Tarkett representative if you are unsure about any part of the installation.
- This information is subject to change due to continuous improvement.
- •Use the same shade number for each continuou surface.
- Store the boxes in small neat piles (max. 5 boxes high).
- Let the flooring acclimatise at least 24h before laying at room temperature (minimum 15°c).
- The subfloor must be flat, level, clean, without marks (no felt pen, marker, etc.), sound, dry, solid, hard, smooth and not exposed to moisture. Absorbency must be checked and adjusted to have moderately absorbent subfloor.
- •Use only adhesives recommended by Tarkett and developed for LVT installation. Always follow the adhesive manufacturer's instructions and recommendations.
- For specific areas with sunlight exposure (winter garden...), select an adapted adhesive recommended by manufacturers.
- The work must be completed with an inspection: ensure that the newly laid floor is free from adhesive residues.

## A - PREPARATION AND IMPORTANT INFORMATION PRIOR TO INSTALLATION

#### A1. Acclimatization


It is important to store the planks for at least 24 hours before installation at a minimum room temperature of 15°C /see each country regulations/. This temperature should be maintained throughout the installation.



### A2. Room temperature conditions

The minimum temperature of the subfloor should be 12°C and room temperature 15°C. The recommended relative humidity inside the room should be 35-65% (see each country regulations).

Planks should be stored flat in their packages, in small neat piles (max. 5 boxes high).



#### A3. Subfloor condition

The subfloor must be level, flat, clean, free from marks (no felt pen, marker of any type, ballpoint pens, paint, etc., that could cause discoloration due to migration) sound, dry, solid, hard, smooth (the absorbency must be checked) and not exposed to moisture.



- 1111 - 2% CM\*


The preparation/dryness of the subfloor and installation procedures should all be in accordance with the current relevant Standard within the country of use. The dryness of a solid subfloor should be below the maximum moisture level permitted when tested in accordance with that Standard.

E.g. in the UK, the relative humidity of concrete surfaces must be below 75%, and less than 2% with the CCM method. In North America, ASTM F-170 recommends

a water-to-cement ratio of 0.40 to 0.45.

Before selecting a smoothing compound, check what type of traffic the floorcovering will be subjected to once installed. Latex smoothing compounds are not suitable for areas that will receive heavy traffic, especially heavy, narrow wheeled traffic (see EN 12529, Castors and wheels). Check levelling compound

compatibility and follow the instructions of the levelling compound manufacturer.




**Note:** exclusion of liability (adhesives, levelling compounds, etc.) Although Tarkett may list a selection of adhesive, levelling compound and surface damp-proof membrane manufacturers and types, we do not guarantee the products listed. The list of products and manufacturers is not guaranteed complete or current. Tarkett will accept no liability for any of these products failing to perform in conjunction with any of its products. It is the responsibility of the adhesive, levelling compound and surface damp-proof membrane manufacturer and flooring contractor to ensure the products being used are appropriate for use and applied in accordance with the manufacturers' recommendations.

## A.4 Underfloor heating

It is imperative that underfloor heating systems have been previously commissioned and found to be functioning correctly before installation of the floorcovering.

Ensure that the underfloor heating system is switched off 48 hours before installation of the

floorcovering commences and remains off for at least 48 hours after installation is completed. While the underfloor heating system is off, an Alternative heating source should be provided, if required, to ensure that the installation area is kept at a constant temperature of 15-28°C. Gradually increase the temperature over a number of days by only a few degrees per day until the desired room temperature is reached.



The temperature should never exceed the floorcovering industry's agreed maximum of 27°C on the underside of the floorcovering (the adhesive line).


#### **B-INSTALLATION**

#### **B1.** Laying direction

Before starting to install tiles/planks, determine the type of laying taking into account the shape of the room and the design to be laid.


Important! Before laying the first rows of tiles, check that:

- the cut tiles closest to the walls are more than 10 cm wide;
- at doorways and corners, the cut tiles are not less than half a whole tile.



## Tiles

- Tiles are marked on the reverse with arrows.
   Tiles should be laid in a checkerboard pattern.
- Installation should start from the center of the room and finish on the sides (walls).




#### **Planks**

Install planks in the same direction to avoid matte/shiny reflection of the surface.

→ | → | → | ↓ | → | ↓

- Stagger each row of planks to ensure that the end joints do not coincide with the previous row installed.
- •For wooden pattern, avoid to install planks with the same design next to each other.





iD Inspiration Marine - 26


## Installation


#### **B.2 Gluing**













• Glue with an acrylic adhesive emulsion recommended by Tarkett. Apply about 250 g/m² using the recommended trowel (A1 according TKB norm).


Always follow the adhesive manufacturer's instructions and respect adhesive drying and working time.





For more details on gluing, please refer to the separate sheet: Adhesive recommendations https://media.tarkett- image.com/docs/BR\_INT\_recommended\_adhesives.pdf

- •In case of particular conditions, ie. Significant temperature variation (veranda, winter garden...) or heavy traffic, bi-component adhesive could be required.
- Place the tiles or planks tight edge to edge.
- After manual pressing, use a heavy roller in both directions to ensure final bonding.









•We recommend to use adhesive dedicated to IMO usage.

## **C - AFTER INSTALLATION**


IMPORTANT! Wait 48 to 72 hours before allowing any foot traffic or moving in furniture.


### C 1. Protection of installation

- If building work is carried out after installation, the floor should always be protected by covering it with hardboard or plywood sheeting.
- Masking tape must not be stuck directly to the floor.
- Never subject a newly installed floorcovering to heavy wheeled traffic at an early stage, as this will force adhesive from beneath the floorcovering.

#### C.2 Initial site clean

- •An initial site clean is always recommended before the new floorcovering is commissioned.
- Residual adhesive should be removed with methylated spirits and a clean cloth.
- Lightly soiled floors: vacuum, sweep or damp mop the area to remove loose dirt and building dust. A combined machine is very effective for large areas (combined scrubber/dryer with cylindrical brushes for safety flooring).







Note: Although Tarkett may list a selection of adhesive, levelling compound and surface damp- proof membrane manufacturers and types, we do not guarantee the products listed. The list of products and manufacturers is not guaranteed complete or current. Tarkett will accept no liability for any of these products failing to perform in conjunction with any of its products. It is the responsibility of the adhesive, levelling compound and surface damp-proof membrane manufacturer and flooring contractor to ensure the products being used are appropriate for use and applied in accordance with the manufacturers' recommendations. If any doubts or clarifications should be needed, please contact your local Tarkett representative for further information.

## Maintenance

#### **GENERAL ADVICE**

- Clean the floorcovering regularly as this is more cost effective and hygienic than occasional heavy duty cleaning.
- Always follow dosage instructions carefully.
- Wipe up any grease and spilt oil immediately, as it may damage the surface.
- Resilient floors are damaged by solvents.
- Black rubber wheels and rubber feet can discolour the floorcovering. All chair and table legs should have good quality feet. Felt feet are not recommended in commercial interiors. Hard plastic is preferred.
- Remember that light colours need more frequent cleaning.

#### PREVENTIVE CARE



#### **Entrance matting**

About 80% of surface soiling that has to be cleaned off is brought from outside.

And 90% of that soiling can be avoided by an effective and correctly dimensioned entrance mat.

The less dirt that comes in through the entrance, the lower the maintenance requirements.

### **DAILY AND REGULAR CLEANING**



#### Dry mopping

Remove dust and dirt with dry mop.



#### Vacuum cleaning

To remove dust and loose dirt. Recommended for large areas andinitial site cleaning.



#### Damp mopping

Use a mop dampened with water or detergent solution. It is essential that water does not stay on the floor or leave a film. The floor should be virtually dry after 15-20 seconds.



#### Combined machine with brush

Industrial machine-cleaning (large areas).
Use diluted neutral detergent.
Adjustable speed 300-500rpm. Use nylon brush not white/beige pad!



### Manual brush

Brush (with medium brushes).



#### Rotowash with brushes

Spray diluted detergent and clean with water or water+detergent.



### Spot and stain removal

Treat stains immediately. Hand spot using a white/red nylon pad with neutral detergent (solvents should not be used). Work from the outside of the mark towards its centre. Rinse and wipe afterwards with clean water.

## **PERIODICAL CLEANING**



#### **Light soiling: Spray Cleaning**

Mix water and neutral detergent in the container tank. Suitable speed 300-500rpm. Red pad is recommended.



#### Heavy soiling: Rotowash

Clean with the cylindrical scrubbing machine (spray detergent diluted with water through the machine).

### If needed:



#### Dry buπin

When necessary, dry buff to recover gloss. White-beige pad. Suitable speed is 500-1000rpm.

If any doubts or clarifications should be needed, please contact your local Tarkett representative for further information

iD Inspiration Marine - 27

# **Technical datasheet**

Classification	Norm	Tarkett value
Norm product specification	ISO 19322	Floor coverings based on thermoplastic polymers
Technical Characteristics	Norm	Tarkett value
Surface treatment		PUR
Total thickness	EN ISO 24346	2.50 mm
Wear layer thickness	EN ISO 24340	0.55 mm
Total weight	EN ISO 23997	4100 g/m²
Technical Performances	Norm	Tarkett value
Fire rating	IMO Resolution	MSC 307(88) Part 5 MSC 307(88) Part 2
	Maritime Approvals	United States Coast Guard & the International convention for Safety Of Life At Sea (Wheelmark certified)
Wet slip resistance	EN 16165	Class R10
Castor chair test	ISO 4918	No damage
Dimensional stability	EN ISO 23999	≤ 0.15 %
Residual indentation	EN ISO 24343-1	≤ 0.10 mm
Thermal resistance	EN ISO 10456	0.02 m <sup>2</sup> •K/W
Colour fastness to light	EN ISO 105-B02	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Sustainability Performances	Norm	Tarkett value
TVOC after 28 days	ISO 16000	≤ 10 µg/m³
Recycled content		15 %
Dimensions and designs	Norm	Tarkett value
Plank (installed size)		San Marco / Malmö / Nantes / Tortuga 18.42 x 121.92 cm 15 planks/box – 3.37 m²/box Virginia / Java 15.24 x 121.92 cm 18 planks/box – 3.34 m²/box
Tile (installed size)		45,72 x 91,44 cm 8 tiles/box = 3.34 m <sup>2</sup>
Number of designs		6 in stock 10 on request (please contact your local Marine Team)

The above information is subject to modification for the benefit of further improvement. (08/2024).

According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.












2812/2024 164.117/ERO2812/MED1004Rev.1



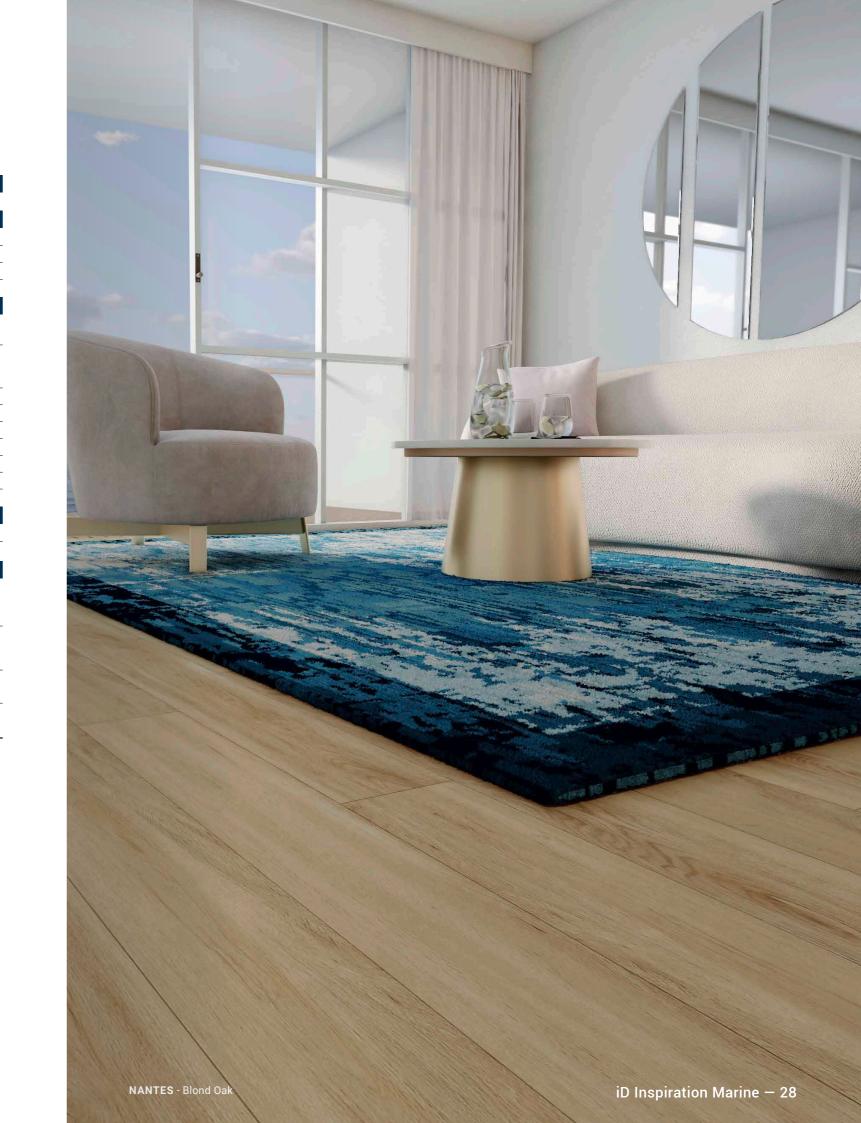



■ WESTERN EUROPE: Austria: Tarkett Holding GmbH - Tel. +43 1 716 440 • Belgium: Tarkett Belux Spri - Tel. +32 52 26 24 11 • Denmark: Tarkett A/S - Tel. +45 43 9 0 60 11 • Finland: Tarkett Oy - Tel. +37 900 • France: Tarkett SAS - Tel. +33 1 41 20 42 49 • Germany: Tarkett Holding GmbH - Tel. +49 621 68172 300 • Greece: Tarkett Monoprosopit Ld - Tel. +30 210 6745 340 • Italy: Tarkett S.A. - Tel. +35 21 427 64 20 • Spain: Tarkett S.A. - Tel. +35 21 427 64 20 • Spain: Tarkett Flooris S.L. - Tel. +43 914 951 400 • Sweden: Tarkett Sverige AB - Tel. +46 771 25 19 00 • Switzerland: Tarkett Holding GmbH - Tel. +41 43 233 79 24 • Turkey: Tarkett Turkey: Tel. +90 212 213 65 80 • United Kingdom: Tarkett Lid - Tel. +44 (0) 1622 854 040 ■ EASTERN EUROPE: Ballic Countries: Estonia: Tel. +377 373 75 515808 • Larkia: Tel. +371 26 112014 ± Lithusnia: Tel. +370 37 78 26220 • Creech Republic: Tarkett Turkey: Tel. +90 212 213 65 80 • United Kingdom: Tarkett Lid - Tel. +44 (0) 1622 854 040 ■ EASTERN EUROPE: Ballic Countries: Estonia: Tel. +370 373 75 515808 • Larkia: Tel. +371 26 112014 ± Tel. +44 (0) 1622 854 040 ■ EASTERN EVROPE: Ballia: Tarkett Kazakhstan: Tel. +770 772 79 00 99 • Poland: Tarkett Polska Sp. zo. o. - Tel. +48 22 16 09 231 • Russian Federation: ZoO Tarkett RUS - Tel. +795 775 3737 • Slovakia: Tarkett Polska Sp. zo. o. o. organizacina zlovka: Tel. +421 2 48291 317 • South East Europe: Tarkett Sec. Tel. +381 21 7557 649 (44) 569 12 21 • Ukraine: Tarkett University of the Sec. Tel. +380 12 557 649 (44) 569 12 21 • Ukraine: Tarkett University of the Sec. Tel. +380 12 557 649 (44) 569 12 21 • Ukraine: Tarkett Holding Kong Limited: Tel. +852 2511 8716 • India: Tarkett Holding Pvt. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 • Polsta Frainett Holding Kong Limited: Tel. +852 2511 8716 • India: Tarkett Holding Pvt. Ltd. - Tel. +86 (346 1585 ■ AFRICA: Tarkett Inc. - Tel. +1 41 435 4073 • North East Asia: Tarkett Holoring Singapore Pte. Ltd. - Tel. +65 6346 1585 ■ AFRICA: Tarkett Inc. - Tel. +1 713 869 5311 7 1 1 1 1 1 1 1 1 1

Designs and photos used in this brochure are for illustration purposes only. Images are not contractual images and do not stand for product recommendation. Due to evolution of standards, characteristics indicated in the text and images are not binding only after confirmation by our departments.

Design: Gecko. Photos: Shutterstock. 3D: Studio 3D Visuals

www.professionals.tarkett.com



