


Your space. Your story. Your iD.

LUXURY VINYL TILES

At Tarkett, innovation is guided by a simple belief: flooring shapes how we live, work, and feel. With the iD range, creativity leads every project. Once the first intuitive choice is made, formats, textures, and installation methods unfold naturally. This intelligent range transforms complexity into clarity, empowering architects, designers and installers to shape each project with ease and intention.

iD – the All-in-One by Tarkett

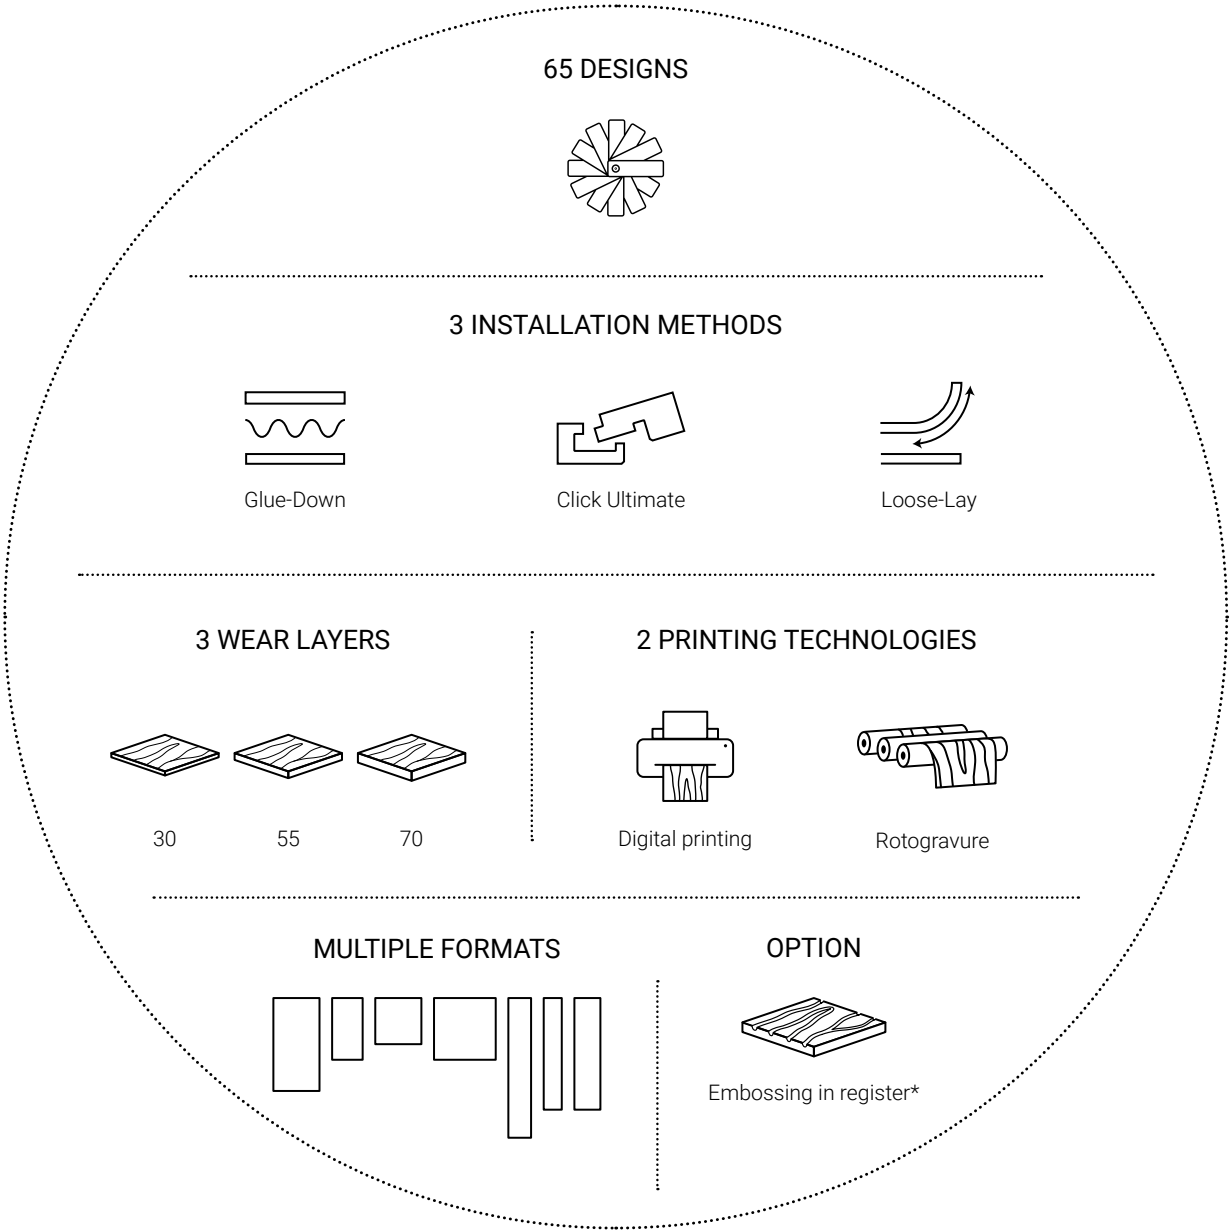


Design freedom

Design is about vision and possibility. The “All-in-One” concept brings these together, giving you complete creative freedom. Each design comes in multiple formats and installation methods, so you choose the look and the rest follows.

The range centres on two complementary collections: **iD Naturals**, inspired by nature and elevated by advanced **digital printing** for exceptional realism, and **iD Classics**, offering a timeless, curated aesthetic for enduring spaces.


1. CHOOSE A DESIGN

65 designs available



2. SELECT AN INSTALLATION METHOD

GD GLUE-DOWN



CU CLICK ULTIMATE



LL LOOSE-LAY



3. CHOOSE A WEAR LAYER

30 Class 23/31*

55 Class 23/33/42*

70 Class 23/34/43*


4. PICK A FORMAT

GD GLUE-DOWN

Woods


20 × 120 cm


12 × 60 cm 


20 × 150 cm


15 × 75 cm 


25 × 150 cm


15 × 75 cm 

Stones


50 × 100 cm



33.33 × 66.66 cm

CU CLICK ULTIMATE


Woods


20.05 × 120 cm


24.3 × 150 cm


20.05 × 150 cm

Stones


48 × 96 cm


32 × 64 cm

LL LOOSE-LAY


Woods


19.7 × 121.7 cm

Stones


49.7 × 99.7 cm


33 × 60.7 cm


66 × 66 cm

* Depending on the installation method. Loose-Lay only available in 55.



iD Classics

Inspired by familiar woods and minerals, iD Classics highlights the subtle depth and texture of timeless materials. Its curated designs offer a foundation for refined, long-lasting interiors.

Contemporary Oak



Country Oak



Delicate Oak



Pure Oak




Composite



Limestone



Polished Concrete

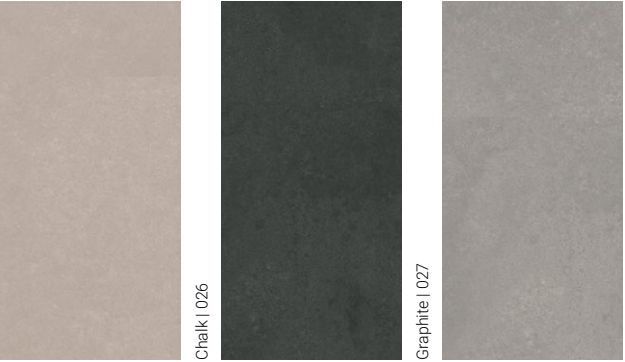

English Oak



Highland Oak



Scandinavian Oak



Rock



Vintage Zinc



iD Classics – Product details and skirtings

Wood

GLUE-DOWN

CLICK ULTIMATE

LOOSE-LAY

Decor	Colour	Code	Skirting											Bevels*										Bevels	Format (cm)		Bevels
				Format (cm)	30	55	70	Format (cm)	30	55	55	70	55		70	55											
Contemporary Oak	grege	001	26646 021	12 x 60	261003 001	261016 001	261046 001	20 x 120	261001 001	261012 001	—	261042 001	4V	20.05 x 120	281014 001	281016 001	—	281018 001	4V	19.7 x 121.7	262002 001	4V					
	grey	002	26646 022		261003 002	261016 002	261046 002		261001 002	261012 002	261042 002	281014 002			281016 002	281018 002	262002 002										
	natural	003	26646 020		261003 003	261016 003	261046 003		261001 003	261012 003	261042 003	281014 003			281016 003	281018 003	262002 003										
Country Oak	blonde	004	26646 202	12 x 60	261003 004	261016 004	261046 004	20 x 120	261001 004	261012 004	—	261042 004	4V	20.05 x 120	281014 004	281016 004	—	281018 004	4V	19.7 x 121.7	262002 004	4V					
	brown	005	26646 203		261003 005	261016 005	261046 005		261001 005	261012 005	261042 005	281014 005			281016 005	281018 005	262002 005										
	honey	006	26646 204		261003 006	261016 006	261046 006		261001 006	261012 006	261042 006	281014 006			281016 006	281018 006	262002 006										
Delicate Oak	almond	007	26646 092	12 x 60	261003 007	261016 007	261046 007	20 x 120	261001 007	261012 007	261010 007	261042 007	4V	20.05 x 120	281014 007	281016 007	281040 007	281018 007	4V	19.7 x 121.7	262002 007	4V					
	clay	008	26646 095		261003 008	261016 008	261046 008		261001 008	261012 008	261010 008	261042 008			281014 008	281016 008	281040 008	281018 008			262002 008						
	toffee	009	26646 043		261003 009	261016 009	261046 009		261001 009	261012 009	261010 009	261042 009			281014 009	281016 009	281040 009	281018 009			262002 009						
English Oak	brown	010	26646 010	12 x 60	261003 010	261016 010	261046 010	20 x 120	261001 010	261012 010	—	261042 010	4V	20.05 x 120	281014 010	281016 010	—	281018 010	4V	19.7 x 121.7	262002 010	4V					
	classical	011	26646 009		261003 011	261016 011	261046 011		261001 011	261012 011	261042 011	281014 011			281016 011	281018 011	262002 011										
	grege	012	26646 013		261003 012	261016 012	261046 012		261001 012	261012 012	261042 012	281014 012			281016 012	281018 012	262002 012										
	grey beige	013	26646 012		261003 013	261016 013	261046 013		261001 013	261012 013	261042 013	281014 013			281016 013	281018 013	262002 013										
	natural	014	26646 011		261003 014	261016 014	261046 014		261001 014	261012 014	261042 014	281014 014			281016 014	281018 014	262002 014										
Highland Oak	cream	015	26646 087	12 x 60	261003 015	261016 015	261046 015	20 x 120	261001 015	261012 015	261010 015	261042 015	4V	20.05 x 120	281014 015	281016 015	281040 015	281018 015	4V	19.7 x 121.7	262002 015	4V					
	golden	016	26646 091		261003 016	261016 016	261046 016		261001 016	261012 016	261010 016	261042 016			281014 016	281016 016	281040 016	281018 016			262002 016						
	smoke	017	26646 089		261003 017	261016 017	261046 017		261001 017	261012 017	261010 017	261042 017			281014 017	281016 017	281040 017	281018 017			262002 017						
Pure Oak	beige	018	26646 208	12 x 60	261003 018	261016 018	261046 018	20 x 120	261001 018	261012 018	—	261042 018	4V	20.05 x 120	281014 018	281016 018	—	281018 018	4V	19.7 x 121.7	262002 018	4V					
	light brown	019	26646 209		261003 019	261016 019	261046 019		261001 019	261012 019	261042 019	281014 019			281016 019	281018 019	262002 019										
	natural	020	26646 210		261003 020	261016 020	261046 020		261001 020	261012 020	261042 020	281014 020			281016 020	281018 020	262002 020										
Scandinavian Oak	medium beige	021	26646 017	12 x 60	261003 021	261016 021	261046 021	20 x 120	261001 021	261012 021	—	261042 021	4V	20.05 x 120	281014 021	281016 021	—	281018 021	4V	19.7 x 121.7	262002 021	4V					
	medium grey	022	26646 015		261003 022	261016 022	261046 022		261001 022	261012 022	261042 022	281014 022			281016 022	281018 022	262002 022										



MINI-PLANKS



• EMBOSSING IN REGISTER**

*Glue-Down 55 & 70 only
**Colour may vary due to EIR technology.
Check final samples.

Stone

GLUE-DOWN

CLICK ULTIMATE

LOOSE-LAY

Decor	Colour	Code	Skirting	Format (cm)	30	55	70	Bevels*	Format (cm)	30	55	70	Bevels	Format (cm)	55	Bevels
Composite	cool grey	023	26646 014	50 × 100	261005 023	261031 023	261061 023	0V	48 × 96	281008 023	281010 023	281012 023	4V	66 × 66	262009 023	0V
Limestone	dune	024	26646 205	50 × 100	261005 024	261031 024	261061 024	0V	48 × 96	281008 024	281010 024	281012 024	4V	66 × 66	262009 024	0V
	sand	025	26646 206		261005 025	261031 025	261061 025			281008 025	281010 025	281012 025			262009 025	
Polished Concrete	chalk	026	26646 207	50 × 100	261005 026	261031 026	261061 026	0V	48 × 96	281008 026	281010 026	281012 026	4V	49.7 × 99.7	262005 026	0V
	graphite	027	26646 177		261005 027	261031 027	261061 027			281008 027	281010 027	281012 027			262005 027	
	indium	028	26646 175		261005 028	261031 028	261061 028			281008 028	281010 028	281012 028			262005 028	
Rock	grey	029	26646 001	33.33 × 66.66	261007 029	261036 029	261066 029	4V	32 × 64	281002 029	281004 029	281006 029	4V	33 × 60.7	262013 029	0V
Vintage Zinc	silver	030	26646 002	33.33 × 66.66	261007 030	261036 030	261066 030	4V	32 × 64	281002 030	281004 030	281006 030	4V	33 × 60.7	262013 030	0V

*Glue-Down 55 & 70 only



iD Naturals

iD Naturals combines natural inspiration with Tarkett’s advanced digital printing expertise to achieve striking realism.

Brook Oak

Dark Brown | 031

Everglade | 032

Brushed Elm

Brown | 033

Natural | 034

Chatillon Oak

Honey | 035

Natural | 036

Creek Oak

Beige | 037

Brown | 038

Forest Oak

Nutmeg | 039

Pistachio Shell | 040

Nomad Oak

Linen | 041

Oat | 042

Toast | 043

Royal Oak Brushed

Beige | 044

Honey | 045

Sisal | 046

Royal Oak Oiled

Brown | 047

Natural | 048

Stained | 049

Variant Oak

Beige | 050

Natural | 051

Breccia

Beige | 052

Grey | 053

Carrara Grande

White | 054

Century

Dawn | 055

Marquina Grande

Black | 056

Patina Concrete

Dark Grey | 057

Light Grey | 058

Medium Grey | 059

Sediment

Grey | 060

Terrazzo Natural

Grey | 061

Sepia | 062

Tivoli Stone

Chalk | 063

Desert | 064

Volcano | 065

Invisible Pattern Repeat

Digital printing enables us to produce a large number of unique pattern variations, ensuring there is no visible pattern repeat over 12m² and creating a more natural appearance.

No repeat up to
10 planks

STANDARD LVT



WITHOUT DIGITAL PRINTING

No repeat up to
50 planks

iD NATURALS

iD Naturals designs display a high definition with non-repeating motifs up to 12m²



DIGITAL PRINTING

iD Naturals – Product details and skirtings

Wood			GLUE-DOWN							CLICK ULTIMATE					LOOSE-LAY		
Decor	Colour	Code	Skirting	 Format (cm)			Format (cm)			Bevels	Format (cm)			Bevels	Format (cm)		Bevels
Brook Oak	dark brown	031	26646 212	15 × 75	261026 031	261056 031	25 × 150	261022 031	261052 031	4V	24.3 × 150	281036 031	281038 031	4V	—	—	—
	everglade	032	26646 213		261026 032	261056 032		261022 032	261052 032			281036 032	281038 032		19.7 × 121.7	262004 032	4V
Brushed Elm	brown	033	26646 057	15 × 75	261026 033	261056 033	25 × 150	261022 033	261052 033	4V	24.3 × 150	281036 033	281038 033	4V	—	—	—
	natural	034	26646 041		261026 034	261056 034		261022 034	261052 034			281036 034	281038 034		—	—	—
Chatillon Oak	honey	035	26646 214	15 × 75	261026 035	261056 035	25 × 150	261022 035	261052 035	4V	24.3 × 150	281036 035	281038 035	4V	—	—	—
	natural	036	26646 060		261026 036	261056 036		261022 036	261052 036			281036 036	281038 036		—	—	—
Creek Oak	beige	037	26646 041	12 × 60	261018 037	261048 037	20 × 120	261014 037	261044 037	4V	20.05 × 120	281028 037	281030 037	4V	—	—	—
	brown	038	26646 043		261018 038	261048 038		261014 038	261044 038			281028 038	281030 038		—	—	—
Forest Oak	nutmeg	039	26646 087	12 × 60	261018 039	261048 039	20 × 120	261014 039	261044 039	4V	20.05 × 120	281028 039	281030 039	4V	—	—	—
	pistachio shell	040	26646 013		261018 040	261048 040		261014 040	261044 040			281028 040	281030 040		—	—	—
Nomad Oak	linen	041	26646 069	15 × 75	261026 041	261056 041	25 × 150	261022 041	261052 041	4V	24.3 × 150	281036 041	281038 041	4V	—	—	—
	oat	042	26646 070		261026 042	261056 042		261022 042	261052 042			281036 042	281038 042		—	—	—
	toast	043	26646 217		261026 043	261056 043		261022 043	261052 043			281036 043	281038 043		—	—	—
Royal Oak Brushed	beige	044	26646 221	15 × 75	261026 044	261056 044	20 × 150	261030 044	261060 044	4V	20.05 × 150	281032 044	281034 044	4V	—	—	—
	honey	045	26646 222		261026 045	261056 045		261030 045	261060 045			281032 045	281034 045		—	—	—
	sisal	046	26646 223		261026 046	261056 046		261030 046	261060 046			281032 046	281034 046		—	—	—
Royal Oak Oiled	brown	047	26646 218	15 × 75	261026 047	261056 047	20 × 150	261030 047	261060 047	4V	20.05 × 150	281032 047	281034 047	4V	—	—	—
	natural	048	26646 219		261026 048	261056 048		261030 048	261060 048			281032 048	281034 048		—	—	—
	stained	049	26646 220		261026 049	261056 049		261030 049	261060 049			281032 049	281034 049		—	—	—
Variant Oak	beige	050	26646 038	12 × 60	261018 050	261048 050	20 × 120	261014 050	261044 050	4V	20.05 × 120	281028 050	281030 050	4V	19.7 × 121.7	262004 050	4V
	natural	051	26646 089		261018 051	261048 051		261014 051	261044 051			281028 051	281030 051		—	—	—
 MINI-PLANKS																	


Stone			GLUE-DOWN					CLICK ULTIMATE				LOOSE-LAY		
Decor	Colour	Code	Skirting	Format (cm)	55	70	Bevels	Format (cm)	55	70	Bevels	Format (cm)	55	Bevels
Breccia	beige	052	26646 211	50 × 100	261033 052	261063 052	0V	48 × 96	281024 052	281026 052	4V	—	—	—
	grey	053	26646 052		261033 053	261063 053			281024 053	281026 053		—	—	—
Carrara Grande	white	054	26646 044	50 × 100	261033 054	261063 054	0V	48 × 96	281024 054	281026 054	4V	—	—	—
Century	dawn	055	26646 059	66.66 × 66.66	261037 055	261067 055	0V	32 × 64	281020 055	281022 055	4V	—	—	—
Marquina Grande	black	056	26646 068	50 × 100	261033 056	261063 056	0V	48 × 96	281024 056	281026 056	4V	—	—	—
Patina Concrete	dark grey	057	26646 034	50 × 100	261033 057	261063 057	0V	48 × 96	281024 057	281026 057	4V	—	—	—
	light grey	058	26646 032		261033 058	261063 058			281024 058	281026 058		—	—	—
	medium grey	059	26646 033		261033 059	261063 059			281024 059	281026 059		—	—	—
Sediment	grey	060	26646 074	66.66 × 66.66	261037 060	261067 060	0V	32 × 64	281020 060	281022 060	4V	—	—	—
Terrazzo Natural	grey	061	26646 215	66.66 × 66.66	261037 061	261067 061	0V	32 × 64	281020 061	281022 061	4V	—	—	—
	sepia	062	26646 216		261037 062	261067 062			281020 062	281022 062		66 × 66	262011 062	0V
Tivoli Stone	chalk	063	26646 224	50 × 100	261033 063	261063 063	0V	48 × 96	281024 063	281026 063	4V	49.7 × 99.7	262007 063	0V
	desert	064	26646 225		261033 064	261063 064			281024 064	281026 064		49.7 × 99.7	262007 064	0V
	volcano	065	26646 226		261033 065	261063 065			281024 065	281026 065		—	—	—



Material excellence


Tarkett's expertise in materials has long defined its reputation for precision and performance. Tektanium continues that legacy with its ultra-matt finish and long-lasting surface treatment against scratches, stains and wear, ensuring designs stay true to the original intent while delivering lasting beauty and reliability.

The iD range has been designed for well-being, offering optimal indoor air quality with ultra-low VOC emissions below 10 µg/m³, alongside a phthalate-free formulation for healthier spaces.

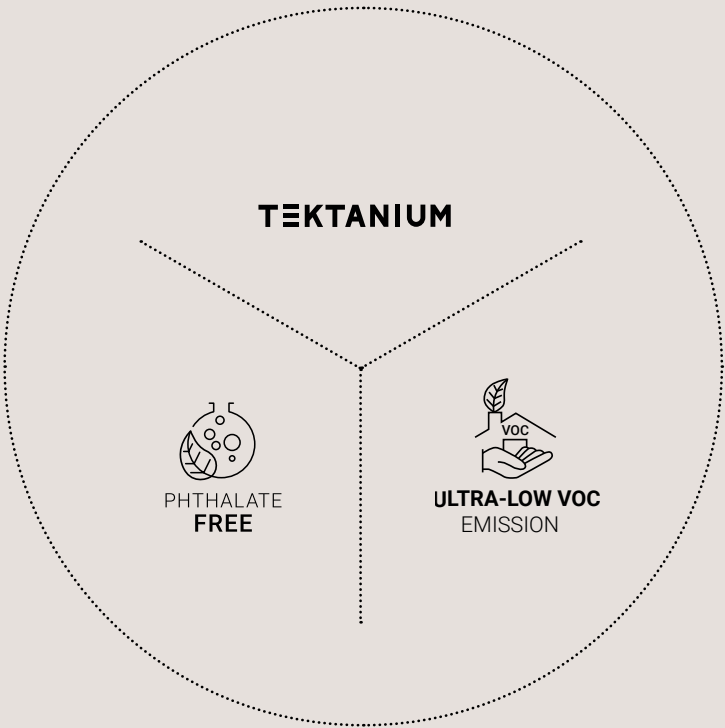

TEKTANIUM

Best ultra-matt finish
and unequalled resistance

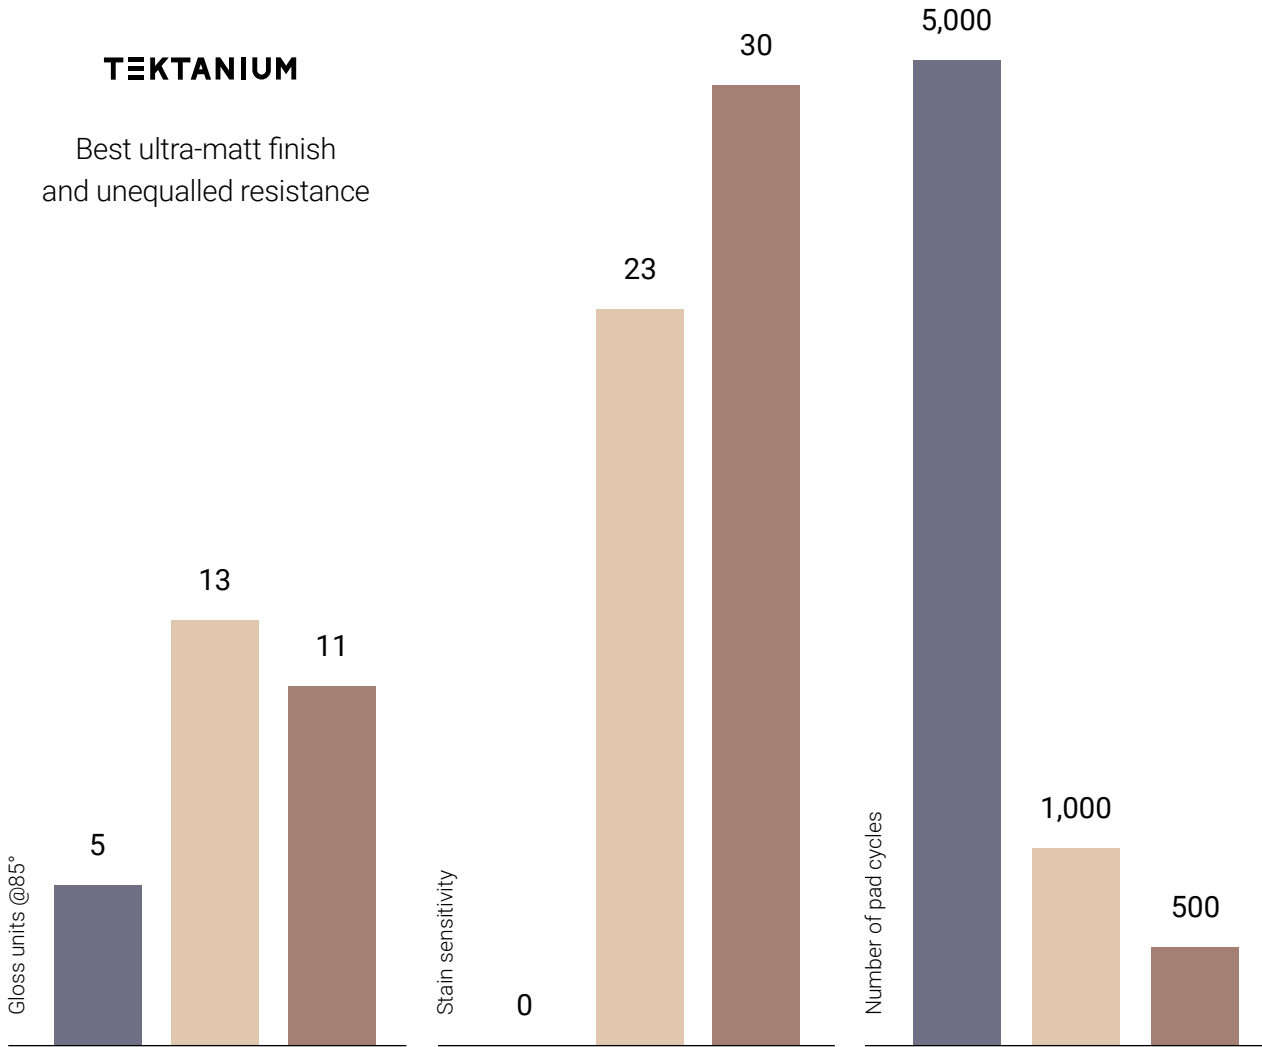

ULTRA-MATT FINISH

Gloss measurement at an 85° angle based on Tarkett's internal tests (in compliance with ISO 2813).

< 6 = ultra-matt
10 = satin

RESISTANCE TO STAINS

Stain resistance measurement based on Tarkett's internal tests (in compliance with ISO 26987).

0 = not affected (best in class)
30 = very affected

RESISTANCE TO WEAR

Wear resistance measurement based on Tarkett's internal tests (based on EN ISO 16094).

5,000 = best in class





- Tarkett: iD Collection
- European competitor A
- European competitor B

- Tarkett: iD Collection
- European competitor A
- European competitor B

- Tarkett: iD Collection
- European competitor A
- European competitor B

Three installation methods. One seamless experience.

Across every project, installation choices influence performance, workflow and durability. The iD range simplifies these decisions with three high-performing options – Glue-Down, Click Ultimate and Loose-Lay – each tailored to specific needs while preserving consistent quality and design integrity.


INSTALLATION METHOD						RECOMMENDED SEGMENTS
CLICK ULTIMATE Engineered for high-performance environments and accelerated project timelines	Thickness: 5.5–6.5 mm	 Unique RCC+ technology: High-density core for exceptional resistance to heavy loads (up to 800 kg for iD 55 & 70) and temperature variations (up to 60°C)	 Renovation-friendly: Install directly over existing ceramic tiles	 Noise reduction: Integrated foam for sound reduction (19 dB)	 Bathroom compatible: GenClick® watertight technology	RESIDENTIAL HOMES HOSPITALITY RETAIL OFFICES
LOOSE-LAY The ideal choice when speed and adaptability are key	Thickness: 4.5 mm	 Minimal downtime: Ultra-fast, overnight installation	 Practical and modular: Easy access to subfloor and individual tile replacement	 Long-lasting stability: Excellent dimensional stability over time	 Mix & match: Compatible with carpet tiles	RESIDENTIAL HOMES HOSPITALITY RETAIL OFFICES
GLUE-DOWN Maximum stability for long-term performance	Thickness: 2–2.5 mm	 Extreme load resistance: Up to 800 kg for iD 70	 Unmatched durability: Designed for intensive, long-term use	 Infinite design possibilities: Mini-planks herringbone, and creative patterns	 Versatile installation: Can be installed on stairs with the corresponding accessories (in compliance with local accessibility regulations)	HOSPITALITY RETAIL OFFICES PUBLIC BUILDINGS



Accessories

DECORATIVE SET-ON SKIRTING

Decorative set-on skirting

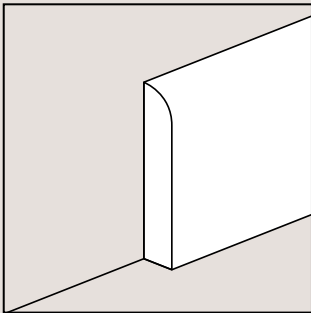


Compact PVC skirting with decorative film and PUR treatment for high resistance to abrasion.

GD CU LL

- Colour-matching skirtings 60 mm (height)
- Colour-matching skirtings 60 mm (height)
- Plain white skirting 60 mm (height) 26646 227
- Plain white skirting 80 mm (height) 35949 080

Renovation Skirting

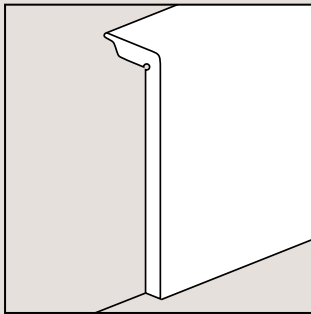


White high density polystyrene foam. 100% recyclable with a protective varnish.

GD CU LL

- White 1411 301

PROTECTION LAYER

Tarkoprotect Fleece 180

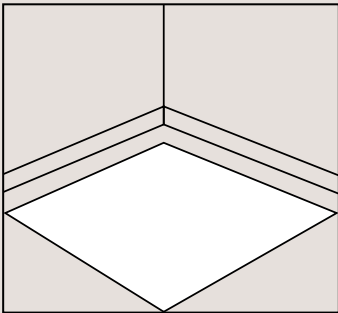


Tarkoprotect 180 is a high-performance, self-adhesive overlayer floor protection veil compatible with all types of floorings.

GD CU LL

- White 24990 002

Tarkoprotect Boards 600

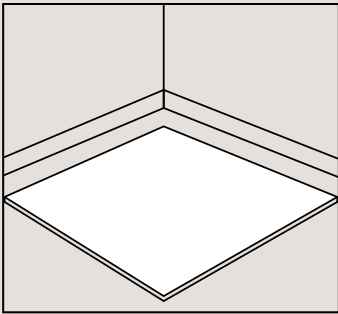


Tarkoprotect Boards 600 is a lightweight cover panel used as a temporary covering, closing off and protecting buildings during various construction stages.

GD CU LL

- White 24990 003

STAIRNOSE PROFILES

Stairnose High Traffic

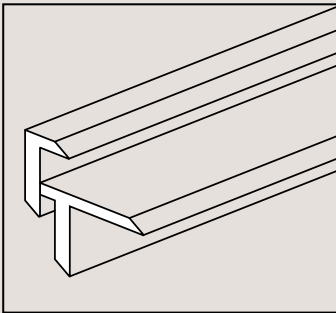


Aluminium stairnose to be screwed. Very resistant to wear and traffic. Ribbed surface for slip-resistance.

LL

- Silver 1434 021
- Stainless Steel 1434 022

Stairnose Very High Traffic

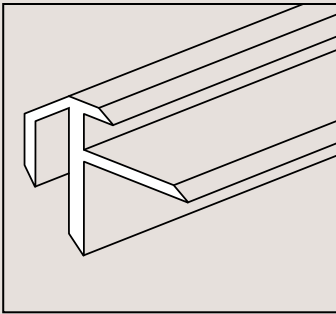


Aluminium stairnose used in high-traffic areas. To be screwed. Ribbed surface for slip-resistance.

LL CU 30

- Silver 1434 011
- Stainless Steel 1434 012

RAMP PROFILES

Ramp Aluminium

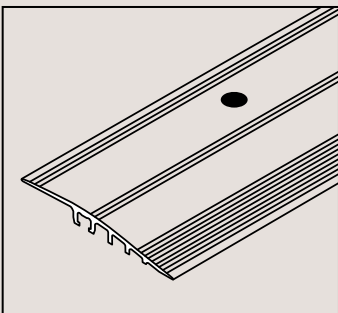

Designed for 6 mm thickness floor covering. To be screwed.


CU LL

- Aluminium 263999 002

Accessories

STOP PROFILES

Bendable stop profile

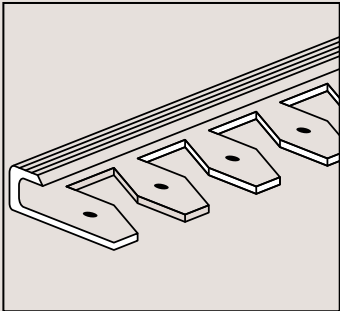


Aluminium transition strip for use in general traffic areas. To be screwed.

LL

- Silver 1456 011
- Stainless Steel 1456 012

Bendable stop profile

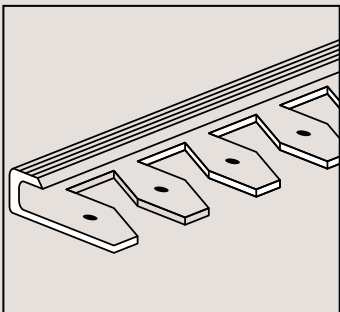


Our aluminium bendable stop profiles (80 cm radius) offer slip resistance thanks to their ribbed surface and are highly resistant to wear and traffic.

CU

- Silver 1456 013

TRANSITION PROFILES

General traffic transition strip

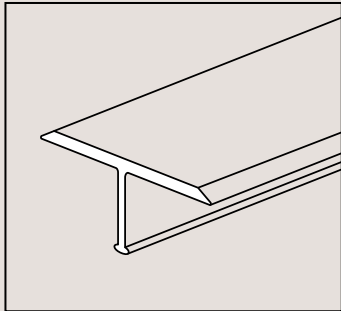

Aluminium transition strip for use in general traffic areas. To be screwed.


LL

CU

30

- Silver 1451 021
- Stainless Steel 1451 022

High-traffic transition strip

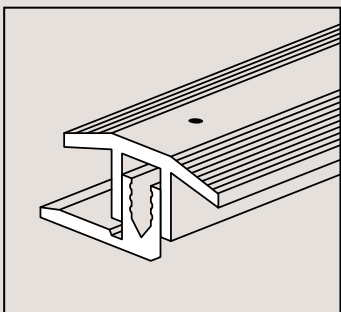

Compact PVC skirting with decorative film and PUR surface treatment to perfectly match selected designs.


CU

LL

- Silver 1451 011
- Stainless Steel 1451 012

ACCESSIBILITY

Rapid'podo warning tiles

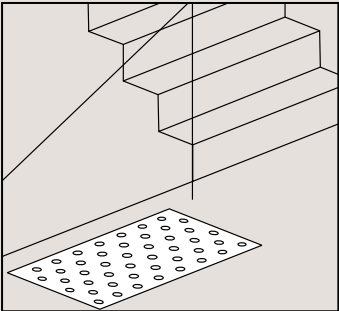

Ready to use self-adhesive warning tiles kit for heavy traffic. Easy, effective and reliable installation.


GD

CU

LL

- Light Grey 1440 611
- Black 1440 610

Tactile strip

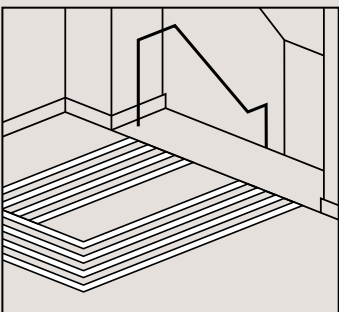

Our tactile linear strips are polyurethane self-adhesive guides for visually impaired people that can be felt by their white stick to warn them of dangers.

GD

CU

LL

- Grey 1440 607
- Black 1440 606



Circular innovation


Tarkett's circular approach shapes every stage of the iD range.

All iD products are now Made in Europe with at least 20% recycled content, reinforcing our commitment to quality, proximity, and a reduced carbon footprint.

The range also represents a major advancement by introducing our first Glue-Down product that has been engineered to be fully recyclable after use through our ReStart® programme.

Circularity isn't a goal for the future; it's the framework guiding how we design and produce today.

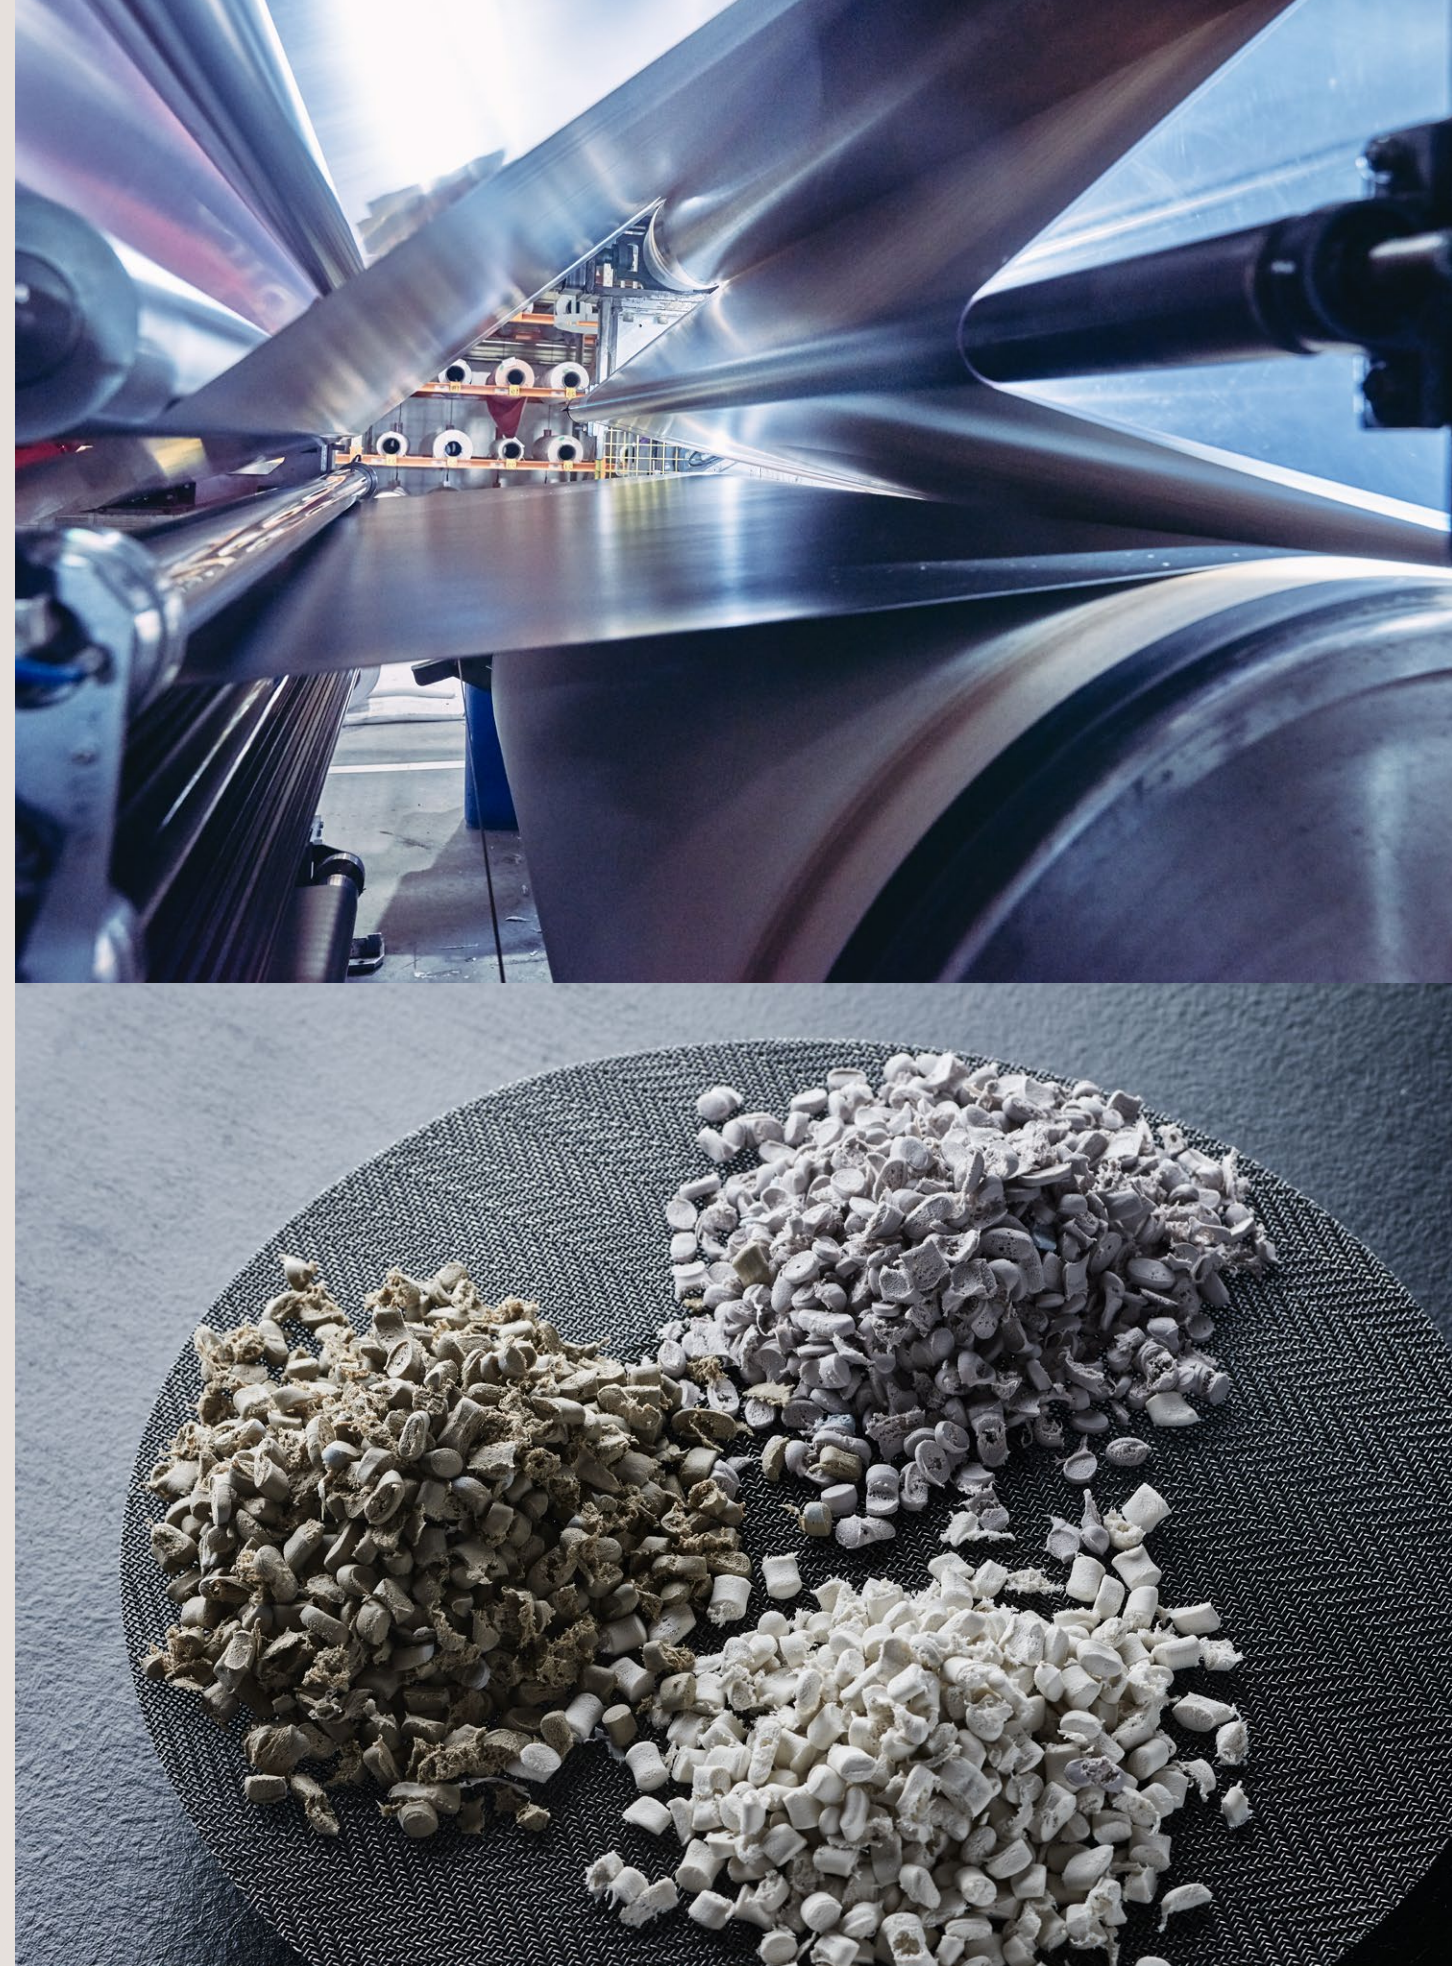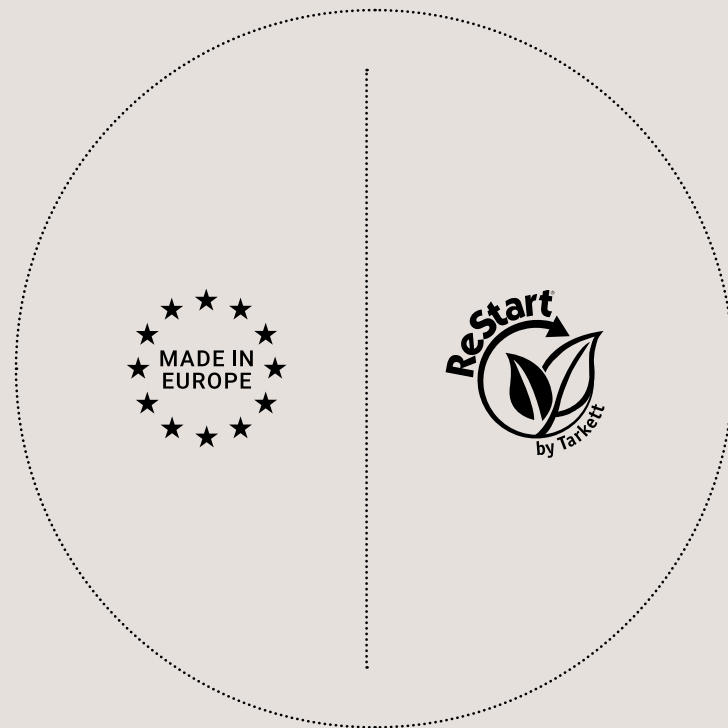

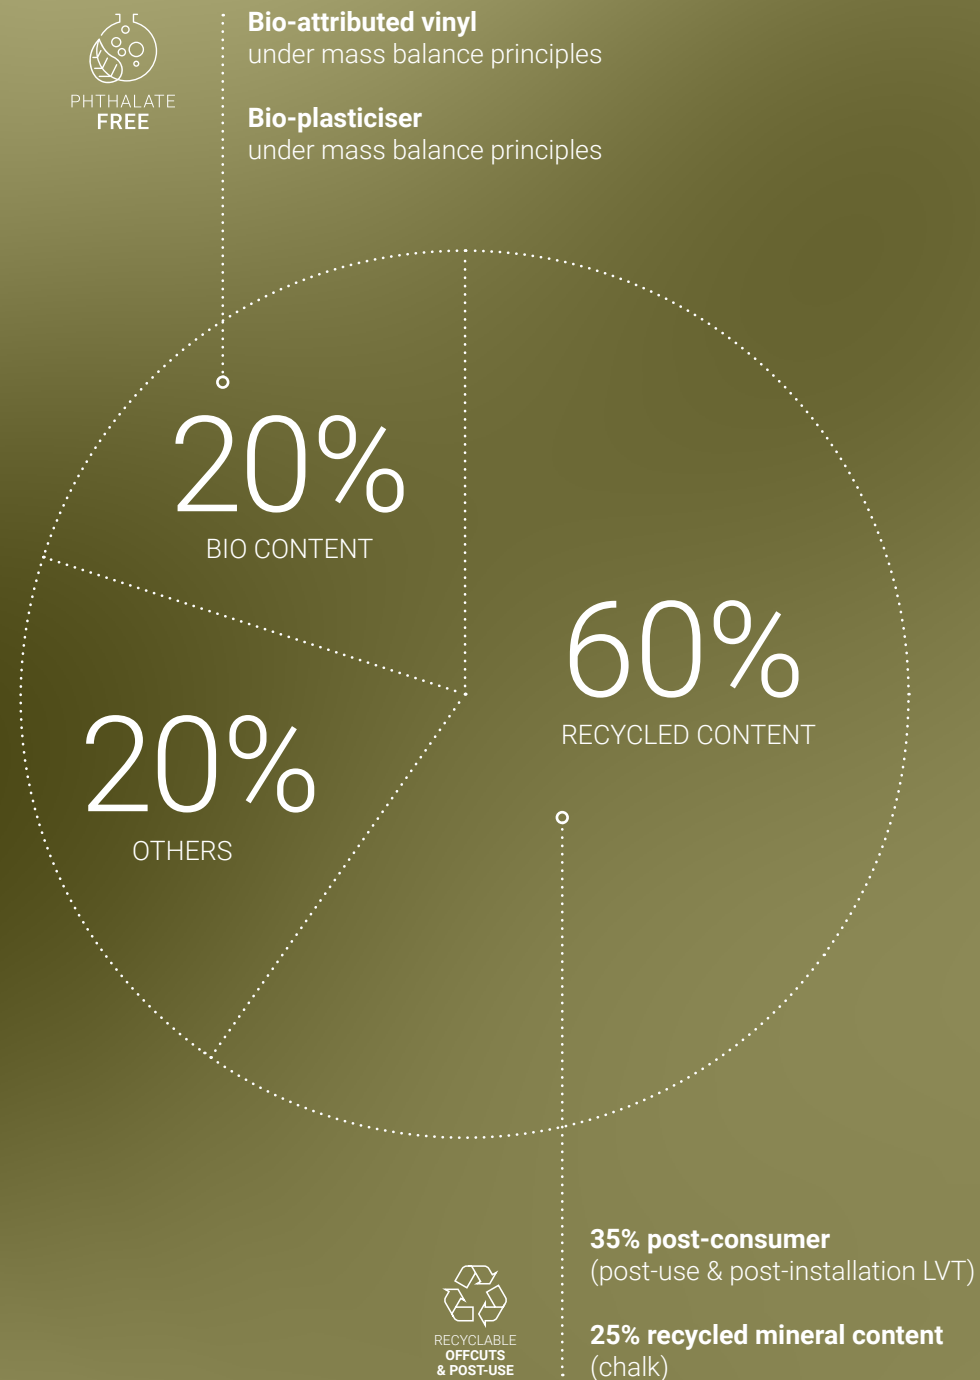


Discover iD Loop

iD Loop is our first iD product made with post-consumer recycled Glue-Down material, turning waste into a high-quality resource. With an average of 60% recycled content, including post-use and bio-attributed materials, it significantly reduces carbon impact.

This innovation closes the loop within the LVT category, proving that performance, beauty, and responsibility can coexist.

iD Loop transforms yesterday's floors into tomorrow's possibilities.

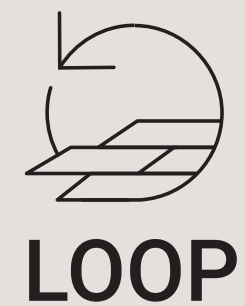



iD Classics – Technical Data

TECHNICAL DATA	STANDARD	iD Classics Glue-Down 30	iD Classics Glue-Down 55	iD Classics Glue-Down 70	iD Classics Click Ultimate 30	iD Classics Click Ultimate 55	iD Classics Click Ultimate 70	iD Classics Loose-Lay 55
Classification	Norm	Tarkett value			Tarkett value			Tarkett value
Product type	EN ISO 10582	Heterogeneous poly (vinyl chloride) floor coverings			Heterogeneous poly (vinyl chloride) floor coverings			Heterogeneous poly (vinyl chloride) floor coverings
Domestic classification	EN ISO 10874		23 Heavy			23 Heavy		23 Heavy
Commercial classification	EN ISO 10874	31 Moderate	33 Heavy	34 Very Heavy	31 Moderate	33 Heavy	34 Very Heavy	33 Heavy
Industrial classification	EN ISO 10874	-	42 General	43 Heavy	-	-	-	42 General
Residential warranty		15 years	20 years	20 years	15 years	20 years	20 years	-
Commercial warranty		-	10 years	10 years	-	10 years	10 years	10 years
Technical Characteristics	Norm	Tarkett value			Tarkett value			Tarkett value
Total thickness	EN ISO 24346	2.00 mm	2.50 mm	2.50 mm	5.50 mm	6.50 mm	6.50 mm	4.50 mm
Wear layer thickness	EN ISO 24340	0.30 mm	0.55 mm	0.70 mm	0.30 mm	0.55 mm	0.70 mm	0.55 mm
Total weight	EN ISO 23997	3400 g/m²	3850 g/m²	3950 g/m²	8900 g/m²	10700 g/m²	10600 g/m²	7800 g/m²
Binder content	EN ISO 10582		Type I			Type I		Type I
Surface treatment			TEKTANIUM			TEKTANIUM		TEKTANIUM
Bevelled edges		No bevel	4 sides (on planks/mini-planks & 33.33 × 66.66 cm)	4 sides (on planks/mini-planks & 33.33 × 66.66 cm)		4 sides		4 sides (on planks)
Installation method			Glue-Down			Click		Loose-Lay
Performance for CE Marking	Norm	Tarkett value			Tarkett value			Tarkett value
Declaration of Performance	EN 14041	0132-0102-DoP-2026-04	0132-0103-DoP-2026-04	0132-0104-DoP-2026-04	0197-0056-DoP-2026-01	0197-0057-DoP-2026-01	0197-0058-DoP-2026-01	0197-0017-DoP-2026-01
Technical Performance	Norm	Tarkett value			Tarkett value			Tarkett value
Dimensional stability	EN ISO 23999	≤ 0.15 %	≤ 0.10 %	≤ 0.10 %	≤ 0.15 %	≤ 0.10 %	≤ 0.10 %	≤ 0.10 %
Curl resultant to heat	EN ISO 23999		≤ 2 mm			≤ 1 mm		≤ 1 mm
Reaction to fire	EN 13501-1		B _f -s1			Bfl-s1		Bfl-s1
Residual indentation	EN ISO 24343-1		≤ 0.05 mm			≤ 0.10 mm		≤ 0.10 mm
Furniture leg	EN ISO 16581		No damage			No damage		No damage
Castor chair	EN ISO 4918		No damage			No damage		No damage
Impact sound reduction – ΔLw	EN ISO 717 / 2		3 dB			19 dB		6 dB
Reduction of in-room impact noise	NF S31-074		Class C (≤ 85 dB)			Class C (≤ 85 dB)		Class C (≤ 85 dB)
Thermal resistance	EN ISO 10456		0.02 m²•K/W		0.06 m²•K/W	0.07 m²•K/W	0.07 m²•K/W	0.04 m²•K/W
Light fastness	EN ISO 105-B02 (method 3 ^a)		≥ 6			≥ 6		≥ 6
Chemical resistance	EN ISO 26987		Excellent resistance			Good resistance		Good resistance
Slip resistance	EN 16165 NB2		R10			R10		R10
	EN 13893		Class DS (μ ≥ 0.30)			Class DS (μ ≥ 0.30)		Class DS (μ ≥ 0.30)
Static Electrical Propensity	EN 1815		Antistatic (≤ 2 kV)			-		-
Underfloor heating			Suitable (subfloor temperature max 27°C)			Suitable (subfloor temperature max 27°C)		Suitable (subfloor temperature max 27°C)
Sustainability Performance	Norm	Tarkett value			Tarkett value			Tarkett value
Recyclability through ReStart®			Offcuts / Post-use			Offcuts / Post-use		Offcuts / Post-use
Recycled content	ISO 14021	37 %	36 %	34 %		20 %		20 %
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)			Available in EPD			Available in EPD		Available in EPD
Carbon Footprint (EPD Modules A-D, incl. Recycling scenario)			Available in EPD			Available in EPD		Available in EPD
Total VOC Emissions (after 28 days)	EN 16516		Platinum (≤ 10 μg/m³)			Platinum (≤ 10 μg/m³)		Platinum (≤ 10 μg/m³)
Dimensions and designs								
Plank		20 × 120 cm 19 planks/box = 4.56 m² 60 boxes/pallet	20 × 120 cm 15 planks/box = 3.60 m² 60 boxes/pallet	20 × 120 cm 15 planks/box = 3.60 m² 60 boxes/pallet	20.05 × 120 cm 9 planks/box = 2.17 m² 44 boxes/pallet	20.05 × 120 cm 8 planks/box = 1.92 m² 40 boxes/pallet	20.05 × 120 cm 8 planks/box = 1.92 m² 40 boxes/pallet	19.7 × 121.7 cm 10 planks/box = 2.40 m² 44 boxes/pallet
Mini-Plank		12 × 60 cm 60 planks/box = 4.32 m² 60 boxes/pallet	12 × 60 cm 50 planks/box = 3.60 m² 60 boxes/pallet	12 × 60 cm 50 planks/box = 3.60 m² 60 boxes/pallet	-	-	-	-
Tile		33.33 × 66.66 cm 20 tiles/box = 4.44 m² 56 boxes/pallet	33.33 × 66.66 cm 16 tiles/box = 3.55 m² 56 boxes/pallet	33.33 × 66.66 cm 16 tiles/box = 3.55 m² 56 boxes/pallet	32 × 64 cm 11 tiles/box = 2.25 m² 40 boxes/pallet	32 × 64 cm 9 tiles/box = 1.84 m² 40 boxes/pallet	32 × 64 cm 9 tiles/box = 1.84 m² 40 boxes/pallet	33 × 60.7 cm 12 tiles/box = 2.40 m² 40 boxes/pallet
		50 × 100 cm 9 tiles/box = 4.5 m² 56 boxes/pallet	50 × 100 cm 7 tiles/box = 3.50 m² 56 boxes/pallet	50 × 100 cm 7 tiles/box = 3.50 m² 56 boxes/pallet	48 × 96 cm 5 tiles/box = 2.30 m² 40 boxes/pallet	48 × 96 cm 4 tiles/box = 1.84 m² 42 boxes/pallet	48 × 96 cm 4 tiles/box = 1.84 m² 42 boxes/pallet	49.7 × 99.7 cm 5 tiles/box = 2.48 m² 42 boxes/pallet
		-	-	-	-	-	-	66 × 66 cm 5 tiles/box = 2.18 m² 42 boxes/pallet
Number of designs available			30			30		30

iD Naturals – Technical Data

TECHNICAL DATA	STANDARD	iD Classics Glue-Down 55	iD Classics Glue-Down 70	iD Classics Click Ultimate 55	iD Classics Click Ultimate 70	iD Classics Loose-Lay 55
Classification	Norm	Tarkett value		Tarkett value		Tarkett value
Product type	EN ISO 10582	Heterogeneous poly (vinyl chloride) floor coverings		Heterogeneous poly (vinyl chloride) floor coverings		Heterogeneous poly (vinyl chloride) floor coverings
Domestic classification	EN ISO 10874	23 Heavy		23 Heavy		23 Heavy
Commercial classification	EN ISO 10874	33 Heavy	34 Very Heavy	33 Heavy	34 Very Heavy	33 Heavy
Industrial classification	EN ISO 10874	42 General	43 Heavy	-	-	42 General
Residential warranty		20 years		20 years	20 years	-
Commercial warranty		10 years		10 years	10 years	10 years
Technical Characteristics	Norm	Tarkett value		Tarkett value		Tarkett value
Total thickness	EN ISO 24346	2.50 mm		6.50 mm		4.50 mm
Wear layer thickness	EN ISO 24340	0.55 mm	0.70 mm	0.55 mm	0.70 mm	0.55 mm
Total weight	EN ISO 23997	3850 g/m²	3950 g/m²	10700 g/m²	10600 g/m²	7800 kg/m²
Binder content	EN ISO 10582	Type I		Type I		Type I
Surface treatment		TEKTANIUM		TEKTANIUM		TEKTANIUM
Bevelled edges		4 sides (on planks/mini-planks)	4 sides (on planks/mini-planks)	4 sides		4 sides (on planks)
Installation method		Glue-Down		Click		Loose-Lay
Performance for CE Marking	Norm	Tarkett value		Tarkett value		Tarkett value
Declaration of Performance	EN 14041	0132-0103-DoP-2026-04	0132-0104-DoP-2026-04	0197-0057-DoP-2026-01	0197-0058-DoP-2026-01	0197-0017-DoP-2026-01
Technical Performance	Norm	Tarkett value		Tarkett value		Tarkett value
Dimensional stability	EN ISO 23999	≤ 0.10 %		≤ 0.10 %		≤ 0.10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm		≤ 1 mm		≤ 1 mm
Reaction to fire	EN 13501-1	B _f -s1		Bfl-s1		Bfl-s1
Residual indentation	EN ISO 24343-1	≤ 0.05 mm		≤ 0.10 mm		≤ 0.10 mm
Furniture leg	EN ISO 16581	No damage		No damage		No damage
Castor chair	EN ISO 4918	No damage		No damage		No damage
Impact sound reduction – ΔLw	EN ISO 717 / 2	3 dB		19 dB		6 dB
Reduction of in-room impact noise	NF S31-074	Class C (≤ 85 dB)		Class C (≤ 85 dB)		Class C (≤ 85 dB)
Thermal resistance	EN ISO 10456	0.02 m²·K/W		0.07 m²·K/W		0.04 m²·K/W
Light fastness	EN ISO 105-B02 (method 3 ^ᵃ)	≥ 6		≥ 6		≥ 6
Chemical resistance	EN ISO 26987	Excellent resistance		Good resistance		Good resistance
Slip resistance	EN 16165 NB2	R10		R10		R10
	EN 13893	Class DS (μ ≥ 0.30)		Class DS (μ ≥ 0.30)		Class DS (μ ≥ 0.30)
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)		-		-
Underfloor heating		Suitable (subfloor temperature max 27°C)		Suitable (subfloor temperature max 27°C)		Suitable (subfloor temperature max 27°C)
Sustainability Performance	Norm	Tarkett value		Tarkett value		Tarkett value
Recyclability through ReStart®		Offcuts / Post-use		Offcuts / Post-use		Offcuts / Post-use
Recycled content	ISO 14021	36 %	34 %	20 %		20 %
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		Available in EPD		Available in EPD		Available in EPD
Carbon Footprint (EPD Modules A-D, incl. Recycling scenario)		Available in EPD		Available in EPD		Available in EPD
Total VOC Emissions (after 28 days)	EN 16516	Platinum (≤ 10 µg/m³)		Platinum (≤ 10 µg/m³)		Platinum (≤ 10 µg/m³)
Dimensions and designs						
Plank		20 × 120 cm 15 planks/box = 3.60 m² 60 boxes/pallet		20.05 × 120 cm 8 planks/box = 1.92 m² 40 boxes/pallet		19.7 × 121.7 cm 10 planks/box = 2.40 m² 44 boxes/pallet
		20 × 150 cm 12 planks/box = 3.60 m² 60 boxes/pallet		20.05 × 150 cm 6 planks/box = 1.80 m² 44 boxes/pallet		-
		25 × 150 cm 10 planks/box = 3.75 m² 60 boxes/pallet		23.4 × 150 cm 5 planks/box = 1.83 m² 42 boxes/pallet		33 × 60.7 cm 12 tiles/box = 2.40 m² 40 boxes/pallet
Mini-Plank		12 × 60 cm 50 planks/box = 3.60 m² 60 boxes/pallet		-		49.7 × 99.7 cm 5 tiles/box = 2.48 m² 42 boxes/pallet
		15 × 75 cm 32 planks/box = 3.60 m² 49 boxes/pallet		-		66 × 66 cm 5 tiles/box = 2.18 m² 42 boxes/pallet
Tile		-		32 × 64 cm 9 tiles/box = 1.84 m² 40 boxes/pallet		
		66.66 × 66.66 cm 8 tiles/box = 3.55 m² 46 boxes/pallet		-		
		50 × 100 cm 7 tiles/box = 3.50 m² 56 boxes/pallet		48 × 96 cm 4 tiles/box = 1.84 m² 42 boxes/pallet		
Number of designs available		35		35		5



www.tarkett.com
© Tarkett, 2026



Descriptions, colours and specifications are subject to change without notice. Tarkett is not responsible for typographical/photographical errors. Actual product may differ from illustration. All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication therefore does not convey nor imply any license under patent or other industrial or intellectual property rights. In case of doubt or differences of interpretation, the English version shall prevail over all other language versions.