


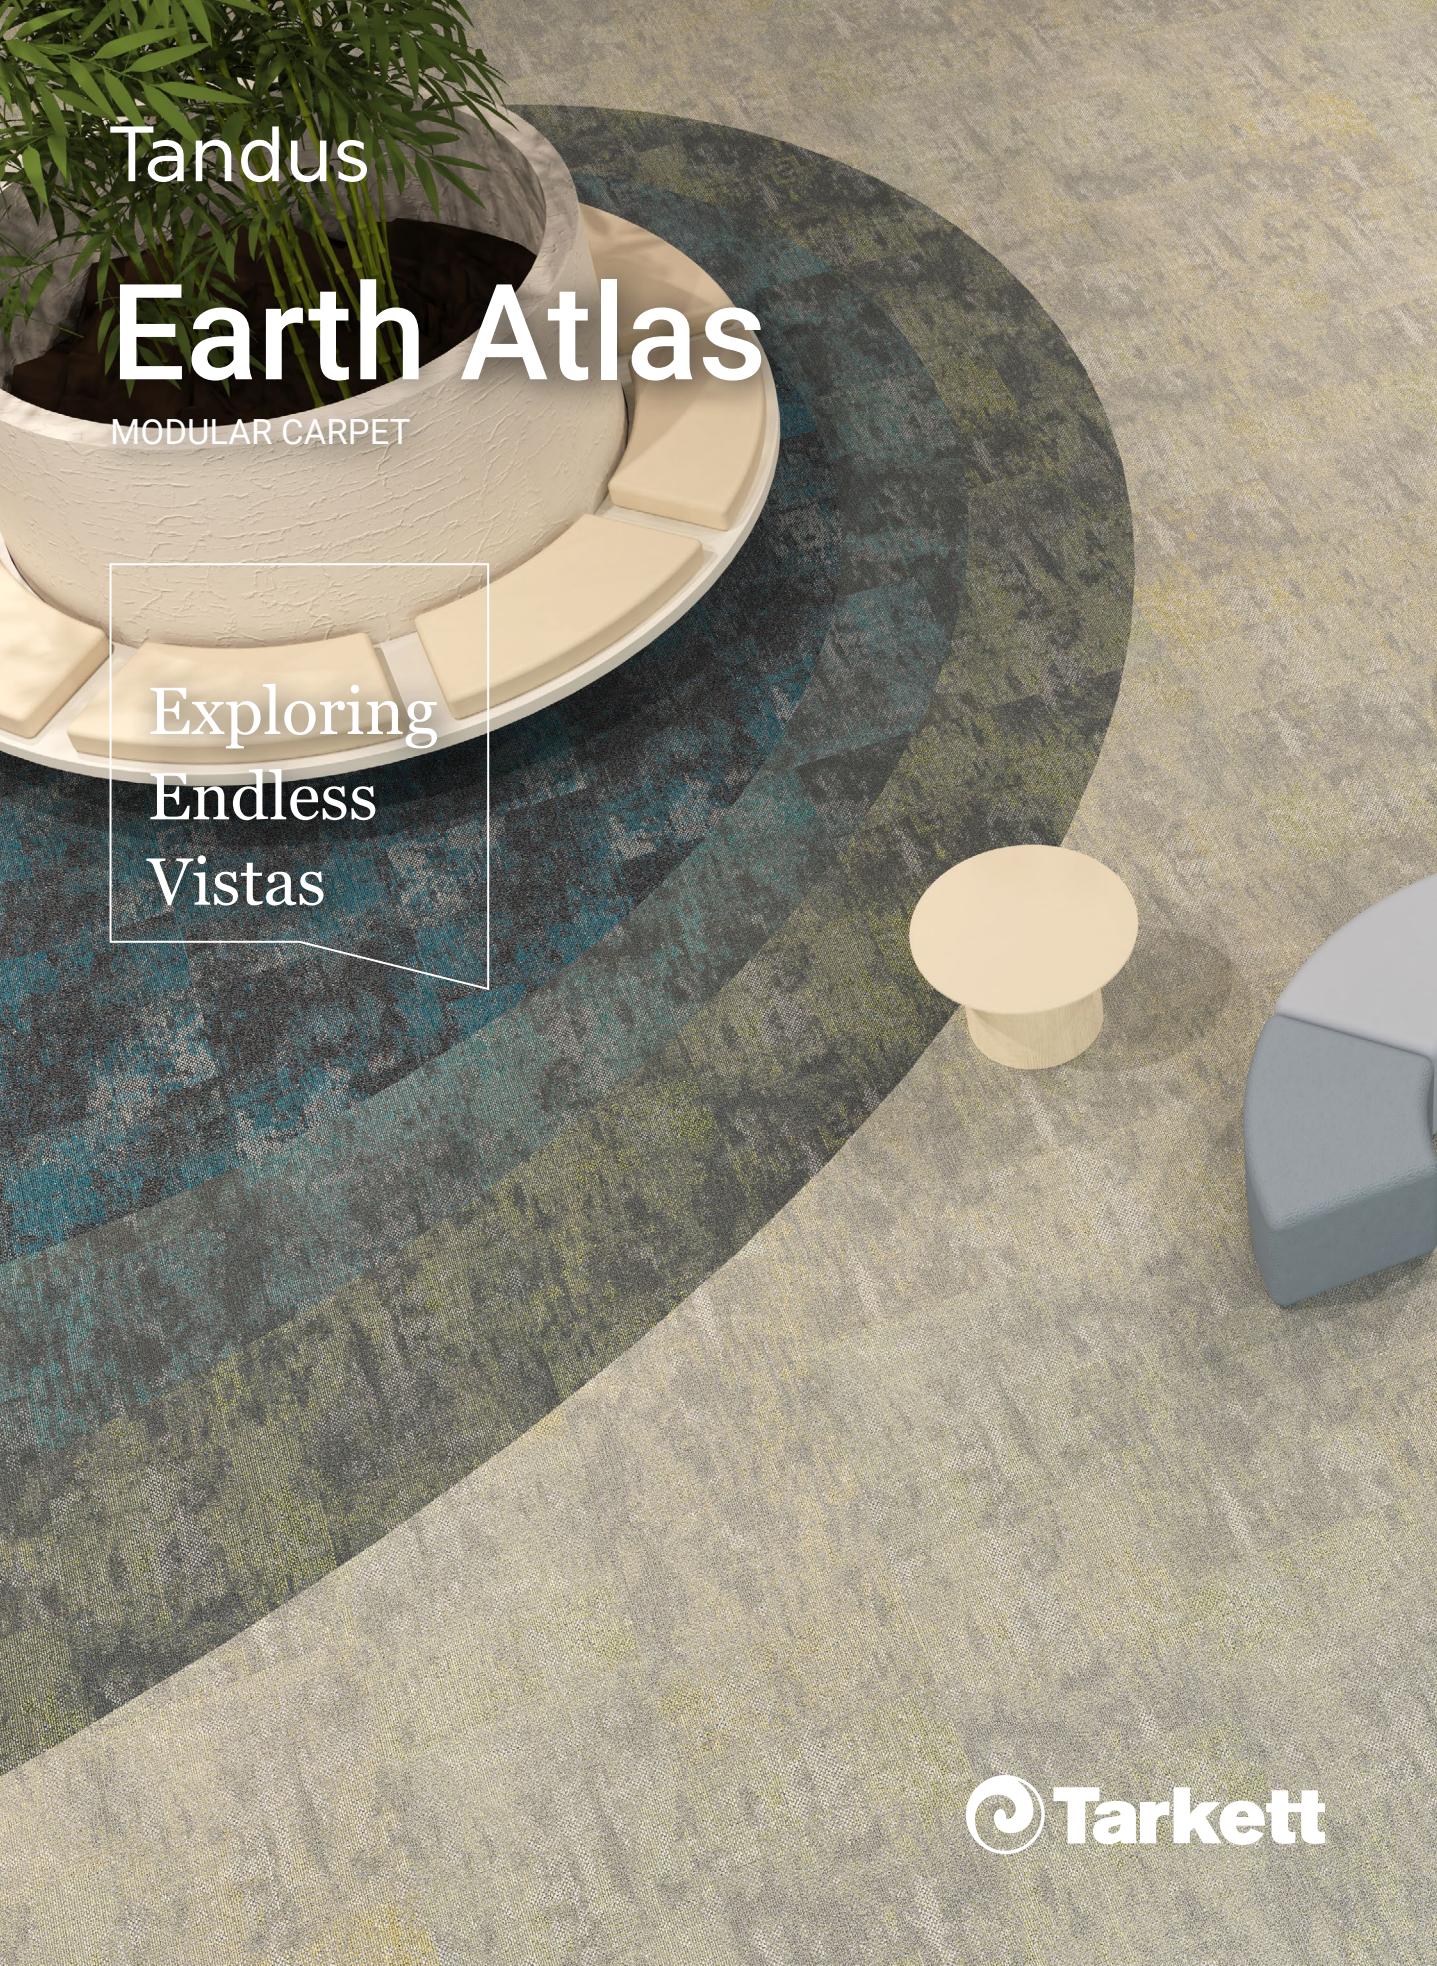

Tandus

Earth Atlas

MODULAR CARPET

Exploring
Endless
Vistas

Earth Atlas

The naturally occurring patterns of distinctive desert oases, giant rock formations, and cracked stones from the cliff, and the tenacious weeds in the sandy soil. These organic and energetic designs inspire Tandus's Earth Atlas Collection and feature biophilic motifs intentionally designed at a larger scale to mimic the grandeur of this iconic terrain.

6 neutral colors represent the basic geology colors. 12 accent colors are designed to match each neutral to present vivid vitality.



Earth Atlas GOLDEN SAND 634001002 / BLOSSOM SAND 634001003 / REEF DEEP 634001018 Tile 50 X 50cm Ashlar Installation




Earth Atlas GOLDEN SAND 634001002 / Degrees Transition CHLI 632058008 Tile 50 X 50cm Ashlar Installation





A biophilic workspace can encourage employees to feel at home and stay longer in the office, similar to working in their own garden.



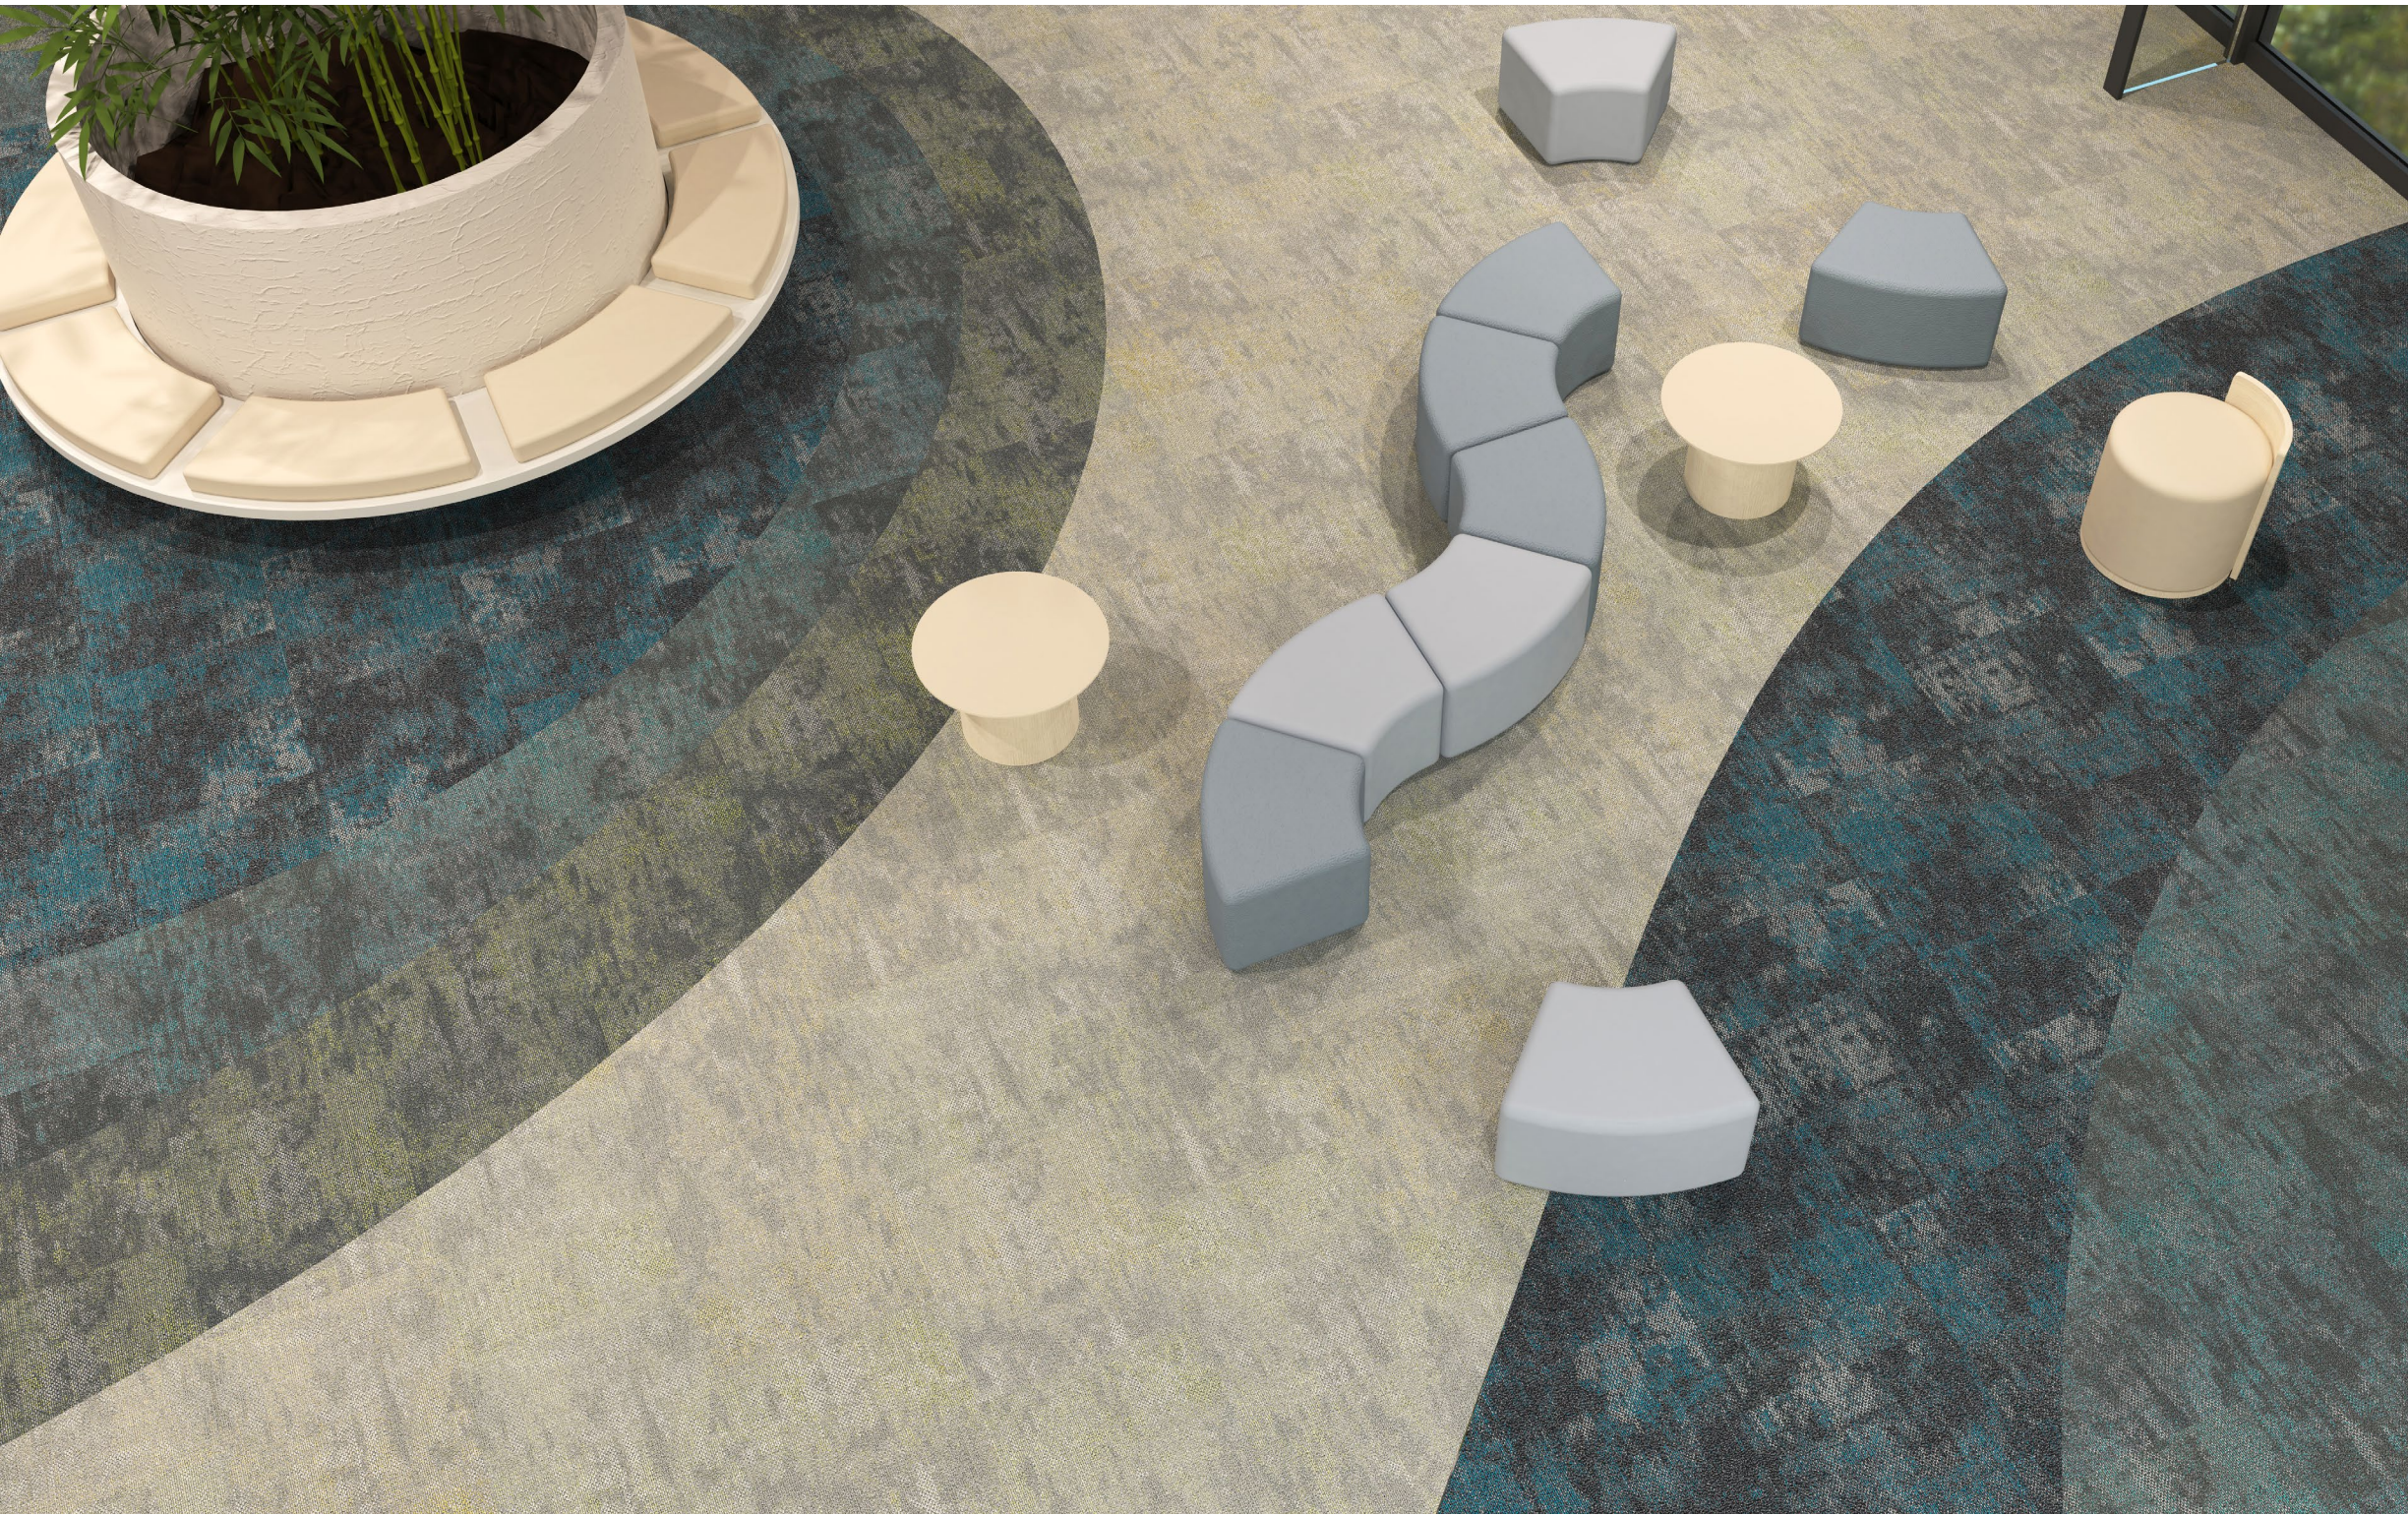

Earth Atlas COAST DEEP 634001017 / STREAM CHARCOAL 634001015 / BUSH CHARCOAL 634001014 / CITRON SILVER 634001005 / MEADOW SILVER 634001006 Tile 50 X 50cm Ashlar Installation

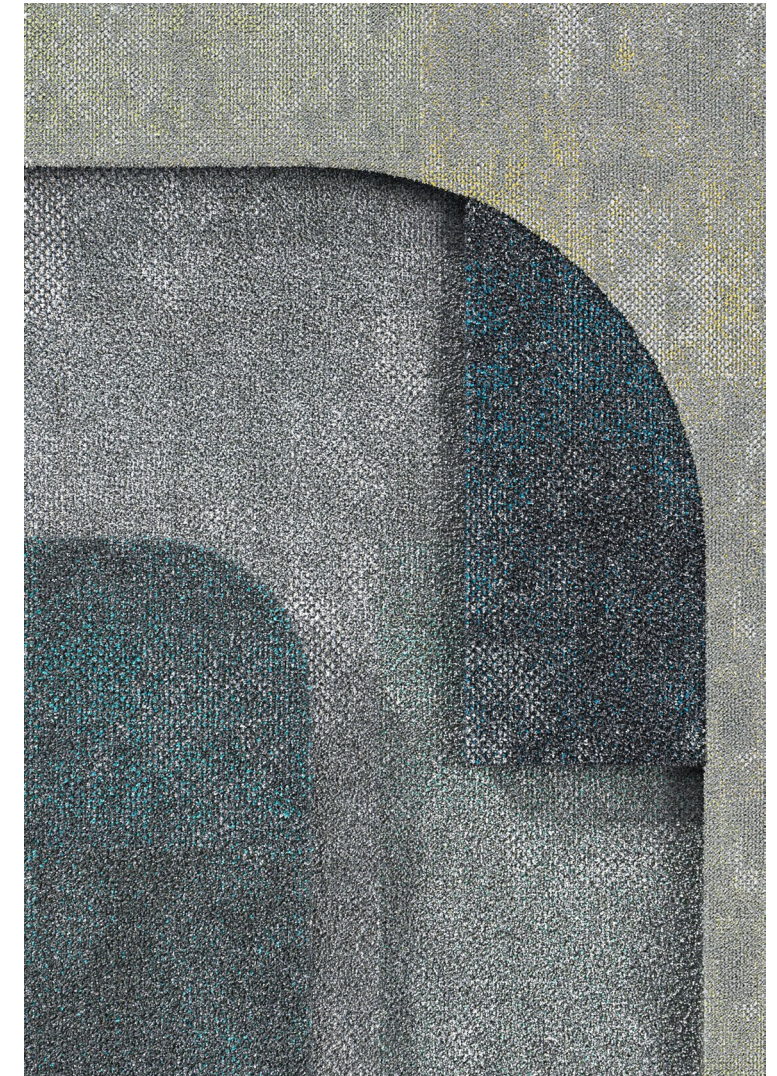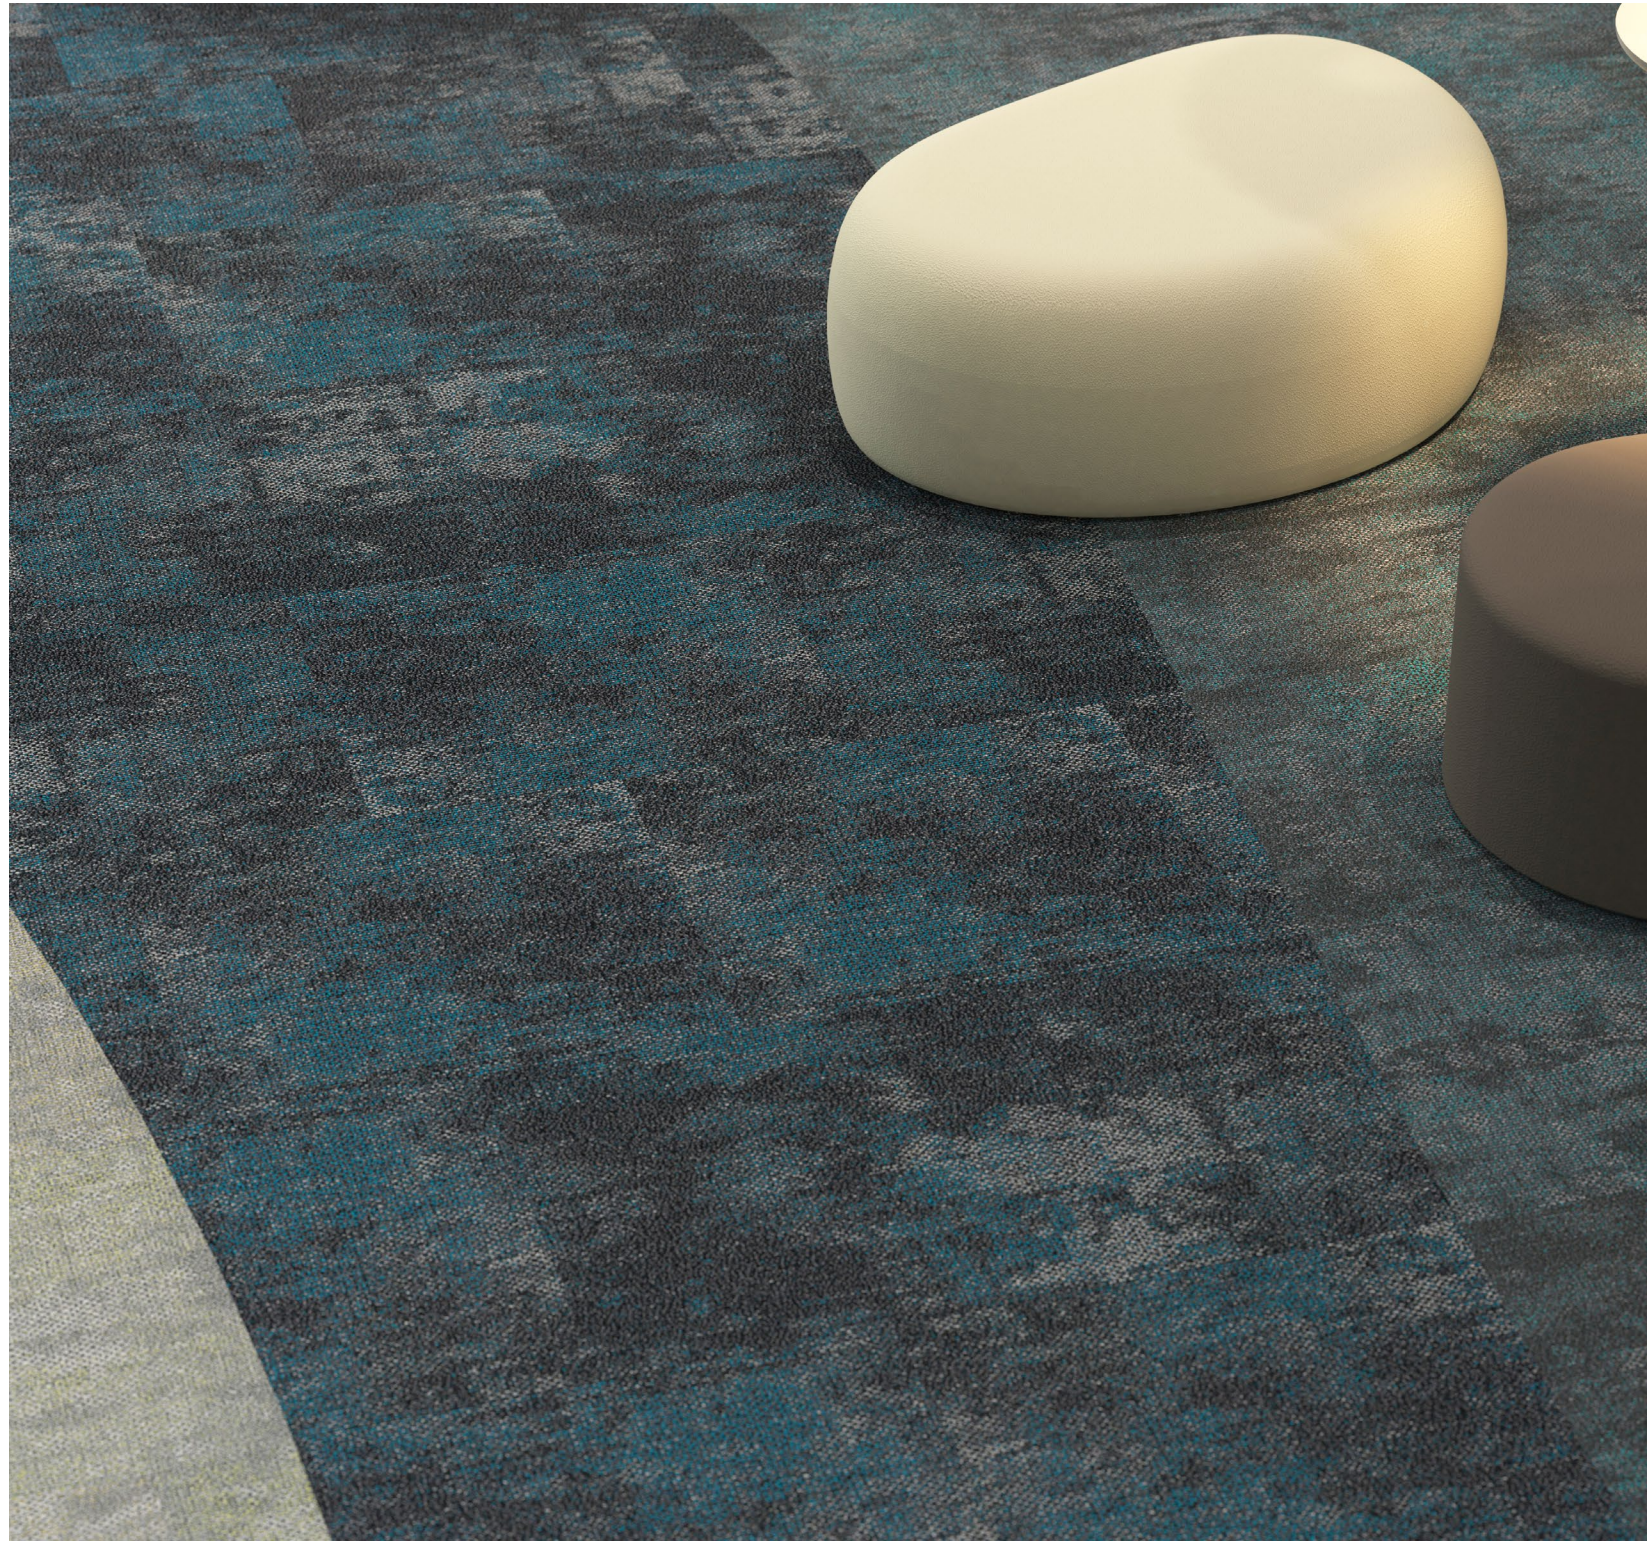

The transition designs in the collaborative space create a welcoming and cheerful atmosphere that fosters optimistic ideas and communication.




Earth Atlas DEEP 634001016 / SAND 634001001 Tile 50 X 50cm Ashlar Installation



A cozy and warm environment allows people to relax and heal, helping them to focus better on their work and increase efficiency.

Colour Range

Earth Atlas

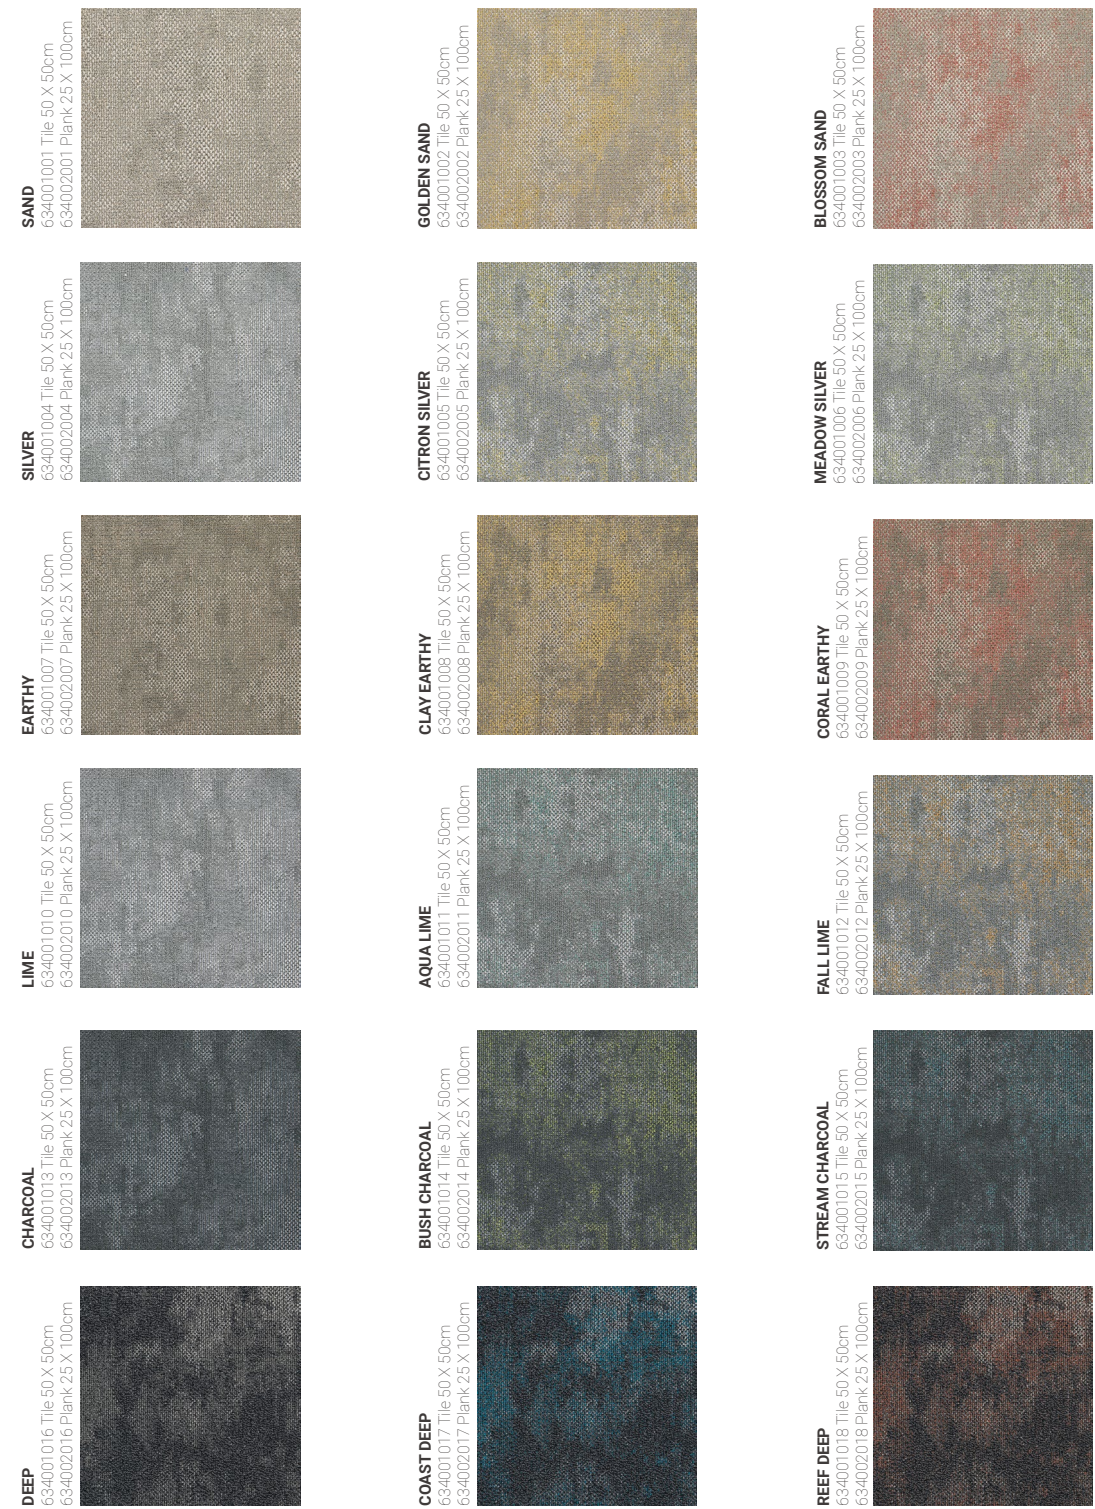


Product specification

Earth Atlas

	Metric	Imperial	Procedure
Construction	Multi-level loop		
Fiber System	100% Universal Nylon6		
Dye Method	100% Solution Dyed		
Gauge	47.2 rows/10cm	1/12	ASTM D-418
Stitches per inch	44.0 stitches/10cm	11.0 stitches/inch	ASTM D-418
Pile Height Average	4.0 mm	0.16 inch	UM44D
Total Product Weight	4,700 g/m ² ± 5%	138.7 oz/yd ² ± 5%	
Total Thickness	6.0 mm	0.24 inch	
Product Testing Information	All Tandus Flooring products comply with CRI Green Label Plus Standards ID: #GLP5288.		
Indoor Air Quality	Passes GB 18587-2001		
Surface Flammability	Passes CPSC FF 1-70		
Flooring Radiant Panel	Class I (Mean average CRF: 0.45 watts/cm ² or higher)		
Electrostatic Propensity	3.0 kV or lower		
Colourfastness to Light	≥ 4 after 100 hours		
Backing System	Tandus ECOPLY™ PVC Backing		
Standard Backing	Tandus ECOBOND™ PVC Backing		
Backing Customization Option	Tandus ECOBOND™ contains a minimum of 35% overall recycled content		
Recycled Content	Recycling 100% recyclable when recovered		
Recycling	250 mm x 1000 mm; 500 mm x 500 mm		
Standard Product Size	For Tiles 500x500mm, 1 box (4sqm) includes 16 tiles of each pattern		
Packaging	For Planks 250x1000 mm, 1 box (4sqm) includes 16 planks of each pattern		

Product Notes

- Product specifications are derived from averages resulting from normal manufacturing tolerances in yarn, fiber, temperature, humidity and colour. Product specifications may vary within normal industry and standardised testing tolerances.
- These specifications reflect mean averages based upon tests of production runs of this carpet style by independent laboratories. A range of variances is implicit in the testing process. Furthermore, the standard test methods established to derive the specifications lack a degree of precision and repeatability; therefore, individual test results on the actual carpet purchased may differ from the specifications above.
- Colours may vary slightly from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements become available which provide for improvement of the product's performance.
- All Tandus Flooring products are 100% recyclable

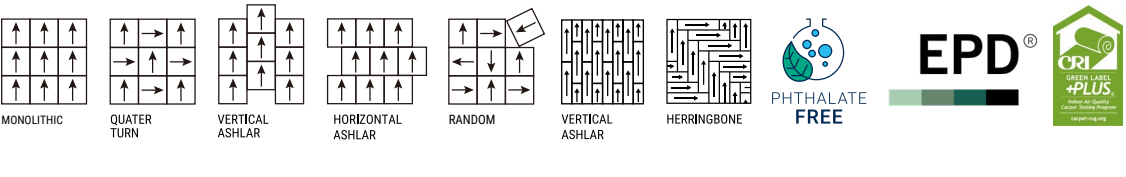

Contact: saleshk@tarkett.com
More information on: www.tarkett-asia.com

