

Lino Style

LINOLEUM FLOORING





Closer To Nature





Grounded in Minerals



Closer to Nature, Grounded in Minerals

Inspired by the timeless beauty of natural materials like stone and minerals, the Lino Style collection brings a sense of calm that is true to nature. Featuring Style Emme that echoes the refined textures of marble, and Style Elle, that reflects the organic warmth of travertine.

Introducing Lino Style Collection

The palette of earthy beiges, mineral greys, soft browns, and muted greens evokes the essence of soil, rock, bark, and moss, enriching interiors with subtle texture and tone. Together, Emme and Elle form a harmonious duo. Their colours perfectly matched to create balanced, grounded spaces.



Style Emme CLAY 431
Style Emme LICHEN 495
Style Emme 100% LINEN 400



Style Emme OMBRA 200
Style Emme PALMA 257
Style Emme SIENNA 434
LinoWall COTTON 122
LinoWall CROCODILE 191

Discover Lino Style Emme

Style Emme leads this mineral story with a tone-on-tone marble design that reimagines classic linoleum with a muted, earthy palette and subtle veining. Crafted from natural materials, it reflects the quiet power of sedimentary formations and the richness of mineral tones.



Style Emme TERRA 211
Style Emme HEMATITE 440
Style Emme BLOSSOM 435
LinoWall CROCODILE 191

Discover Lino Style Elle

Style Elle introduces a refined linear design, drawing from the elegance of organic elements conveying the essence of travertine and other mineral textures. Its understated lines and muted palette offer a contemporary sense of depth and warmth.

Style Emme TERRA 211
Style Elle TERRA 311
Style Emme HEMATITE 440



Style Emme PEPE 293
Style Emme HEMATITE 440
Style Elle CHESNUT 451
Style Elle PALLADINO 390

Closer to Natural Materials

Natural ingredients have been at the heart of our linoleum since its origins in 1898, particularly through our continued use of cork. The Lino Style collection carries on this tradition, incorporating all of the original recipe natural ingredients of linseed oil, pine rosin, wood flour, and cork, bringing you closer to nature. Responsibly sourced and selected for their performance and recyclability, these materials come together to create a surface that is both beautiful and durable.

Rooted in the strength and serenity of mineral world, Style Emme and Style Elle reinterpret the natural materials that have been formed by time and have shaped human environments for centuries. These patterns don't simply decorate a room, they ground it creating a backdrop that supports focus, creativity, and wellbeing, offering a quiet visual anchor among modern demands. For architects and designers, the Lino Style collection offers more than aesthetic versatility.



LinoWall DENIM 170
Style Elle PALLADINO 390
DESSO AirMaster Sphere AD21 1510



Beauty

Jute Backing



of Circularity

Linoleum Finished Rolls

Learning from Nature's Cycles


Inspired by nature's endless cycles, all of our linoleum flooring is designed with its next life in mind, and Lino Style is no different. With the help of our network of partners, fully recyclable post-consumer linoleum is collected through ReStart®, our pioneering take-back and recycling programme and returned to our factory. It is then broken down and used in the next generation of flooring or other high value applications, keeping valuable resources in a continuous cycle.



Linoleum Paste

Post-Consumer Linoleum

Our Circular Carbon Footprint⁽¹⁾

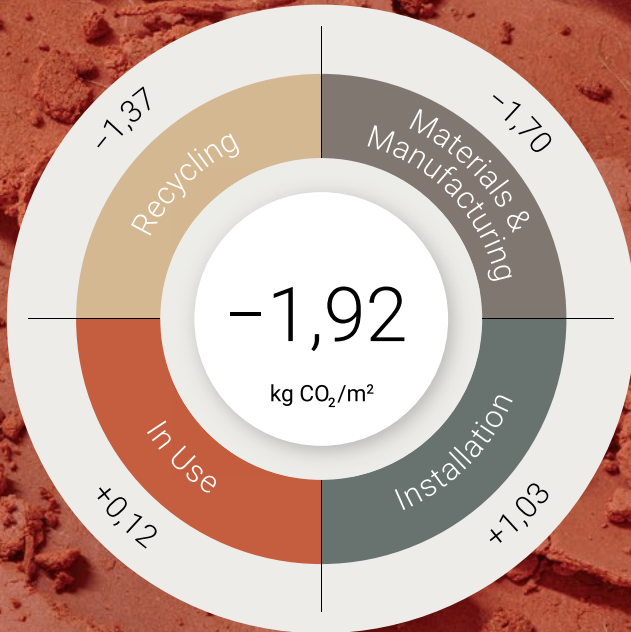

One of the world's lowest carbon footprints for linoleum, considering all stages of the life cycle.⁽²⁾

To keep track of the carbon generated and saved over a product's life cycle, we calculate the Circular Carbon Footprint of our linoleum floors, which deliver an extremely low level of carbon footprint over the full life cycle. This outstanding achievement reflects a truly circular approach — combining responsibly sourced renewable raw materials with design for deconstruction, recycling, and reuse of materials.

Tarkett Lino's circular design and systems enable the flooring to be recovered at the end of its life, before being recycled and reused at our dedicated facilities or through open-loop recycling. This milestone is based on data of an externally verified Environmental Product Declaration.⁽²⁾

(1) Figures reported in this diagram refer to Tarkett 2.5 mm linoleum

(2) For Tarkett Linoleum ranges (2-4.4 mm), based on the Environmental Product Declaration (EPD N° 4791835705.101.1) externally verified by EPD programme operator UL. Based on the carbon footprint (Modules A-D), where Module D is calculated using the future recycling benefit with an open-loop recycling scenario, facilitated through Tarkett's ReStart® recycling and take-back program. For more information: linostyle.tarkett.com

Sustainability Credentials⁽¹⁾

94%
Natural Ingredients

76%
Bio-based Content

36%
Recycled Content

100%
Recyclable

Cradle to Cradle®,
Silver Level Certified

At Tarkett, our approach to circularity focuses on three key areas: design, materials and circular journey. For us, the beauty of circularity is about the beauty of the reused materials that go into our products, the innovative manufacturing processes we implement, and the knowledge that we're actively cutting down on waste and greenhouse gas emissions.

(1) Figures reported in this diagram refer to Tarkett Lino Style 2.5 mm

Making the Lino Style Collection


Proudly made in our factory in Narni, Italy, Lino Style delivers one of the world's lowest carbon footprints for linoleum, considering all stages of the life cycle⁽³⁾. It is produced sustainably using 100% recirculated industrial water and 100% renewable electricity. 40% of the factory's energy is self-generated using technologies such as photovoltaic panels.

(3) For Tarkett Linoleum ranges (2-4.4 mm), based on the Environmental Product Declaration (EPD N° 4791835705.101.1) externally verified by EPD programme operator UL. Based on the carbon footprint (Modules A-D), where Module D is calculated using the future recycling benefit with an open-loop recycling scenario, facilitated through Tarkett's ReStart® recycling and take-back program. For more information: linostyle.tarkett.com



Production of Linoleum

The Lino Style Collection is available in different performance options:



STANDARD SOLUTION – 2.5 mm long-lasting resilient floor.

Style Emme xf² – [click here tor Technical data sheet](#)
Style Elle xf² – [click here tor Technical data sheet](#)



ACOUSTIC SOLUTION – 19 dB

Sound reduction of 19 dB thanks to jute backing and recycled foam underlayer.
Available for a selection of designs – check in the reference table.

Style Emme xf² – [click here tor Technical data sheet](#)
Style Elle xf² – [click here tor Technical data sheet](#)



FIRE-RESISTANT SOLUTION – Bfl-s1

Without flame retardants: the Bfl rating is achieved by our specific recipe with natural component materials. Ideal for evacuation routes.
All designs are available on request.

Style Emme xf² Bfl – [click here tor Technical data sheet](#)
Style Elle xf² Bfl – [click here tor Technical data sheet](#)



SLIP RESISTANT SOLUTION – R10

R10 slip resistance for areas that may occasionally get wet, like entryways.
Style Emme designs only – available on request.

Style Emme xf² Sicuro – [click here tor Technical data sheet](#)



xf² – X-treme Finish

On all Style Emme collections for easy cleaning and superior resistance against abrasion and chemicals.

Style Emme – Marbled tone on tone pattern

COLOUR NAME	COLOUR REFERENCE	Standard	Acoustic 19 dB	Slip resistance R10	Fire resistant	Linoleum		Welding Rod 4 mm	
		Style Emme	Style Emme	Style Emme Sicuro R10 xf² 2.5 mm	Style Emme Bfl xf² 2.5 mm			Uni Color	
		xf² 2.5 mm	xf² 3.8 mm	ON REQUEST	ON REQUEST	NCS code	LRV	ref.	NCS code
100% linen	400	14235400	14682400	14865400	14088400	S 4020-Y30R	27%	14009400	S 4020-Y30R
Aria	285	14235285	–	14865285	14088285	S 2002-Y	40%	14009793	S 3000N
Blossom	435	14235435	14682435	14865435	14088435	S 3020-Y70R	33%	14009435	S 3020-Y60R
Celeste	260	14235260	–	14865260	14088260	S 2010-G	38%	14009760	S 2010-B70G
Cemento	202	14235202	14682202	14865202	14088202	S 3502-Y	26%	14009202	S 4005-Y20R
Cenere	201	14235201	14682201	14865201	14088201	S 3005-Y20R	34%	14009201	S 3010-Y20R
Clay	431	14235431	–	14865431	14088431	S 6010-Y30R	13%	14009524	S 7010-Y30R
Cliff	485	14235485	–	14865485	14088485	S 5000-N	26%	14009692	S 5502-G
Cornflower	460	14235460	–	14865460	14088460	S 4010-B70G	23%	14009460	S 4020-B50G
Ferro	205	14235205	–	14865205	14088205	S 5502 Y	13%	14009205	S 5502-Y
Foam	402	14235402	14682402	14865402	14088402	S 2502-Y	46%	14009002	S 3010-G70Y
Granite	486	14235486	–	14865486	14088486	S 7000-N	11%	14009906	S 6005-B20G
Hematite	440	14235440	–	14865440	14088440	S 4040-Y70R	15%	14009945	S 4040-Y80R
Laguna	265	14235265	–	14865265	14088265	S 4020-B10G	20%	14009765	S 4030-B
Laterite	245	14235245	–	14865245	14088245	S 3030-Y80R	24%	14009245	S 3030-Y80R
Lichen	495	14235495	–	14865495	14088495	S 4010-G90Y	25%	14009495	S 5010-G90Y
Ochre	428	14235428	–	14865428	14088428	S 3040-Y30R	28%	14009428	S 3040-Y20R
Oliva	258	14235258	–	14865258	14088258	S 5010-G30Y	19%	14009091	S 5010-G30Y
Ombra	200	14235200	–	14865200	14088200	S 1505-Y20R	43%	14009601	S 2010-Y10R
Palladino	290	14235290	–	14865290	14088290	S 2010-Y30R	48%	14009700	S 1010-Y30R
Palma	257	14235257	–	14865257	14088257	S 3010-G50Y	30%	14009257	S 3010-G50Y
Pearl	401	14235401	14682401	14865401	14088401	S 1010-Y30R	63%	14009700	S 1010-Y30R
Pepe	293	14235293	–	14865293	14088293	S 3000-N	36%	14009001	S 3005-G80Y
Pepper	473	14235473	14682473	14865473	14088473	S 6005-Y80R	16%	14009473	S 6005-Y80R
Prussian	766	14235766	14682766	14865766	14088766	S 6020-B	12%	14009766	S 6020-B
Raffia	408	14235408	–	14865408	14088408	S 1515-Y30R	54%	14009619	S 2020-Y10R
Sienna	434	14235434	–	14865434	14088434	S 4050-Y30R	23%	14009434	S 3050-Y50R
Terra	211	14235211	–	14865211	14088211	S 3010-Y40R	31%	14009211	S 3010-Y40R
Tobacco	730	14235730	–	14865730	14088730	S 4010-Y50R	24%	14009502	S 5010-Y10R
Velluto	203	14235203	–	14865203	14088203	S 5005-Y20R	16%	14009303	S 5005-Y20R

Style Elle – Linear understated pattern

COLOUR NAME	COLOUR REFERENCE	Standard	Acoustic 19 dB	Fire resistant	Linoleum		Welding Rod 4 mm	
		Style Elle	Style Elle	Style Elle Bfl xf² 2.5 mm			Uni Color	
		xf² 2.5 mm	xf² 3.8 mm	ON REQUEST	NCS code	LRV	ref.	NCS code
Chestnut	451	14225451	–	14098451	S 6010-Y30R	15%	14009524	S 7010-Y30R
Ferro	305	14225305	–	14098305	S 5502-Y	15%	14009205	S 5502-Y
Palladino	390	14225390	14683390	14098390	S 2010-Y30R	50%	14009625	S 3020-Y10R
Palma	357	14225357	–	14098357	S 2010-G60Y	36%	14009793	S 3000N
Pepe	393	14225393	–	14098393	S 3000-N	35%	14009001	S 3005-G80Y
Sabbia	308	14225308	14683308	14098308	S 1515-Y30R	46%	14009619	S 2020-Y10R
Terra	311	14225311	–	14098311	S 3010-Y40R	39%	14009211	S 3010-Y40R
Velluto	303	14225303	14683303	14098303	S 5005-Y20R	22%	14009303	S 5005-Y20R



14235 200
NCS S 1505-Y20R / LRV 43%



14235 202 ⑤ 14682 202
NCS S 3502-Y / LRV 26%



14235 402 ⑤ 14682 402
NCS S 2502-Y / LRV 46%



14235 257
NCS S 3010-G50Y / LRV 30%



14235 260
NCS S 2010-G / LRV 38%



14235 285
NCS S 2002-Y / LRV 40%




14235 293
NCS S 3000-N / LRV 36%



14235 203
NCS S 5005-Y20R / LRV 16%



14235 205
NCS S 5502-Y / LRV 13%




14235 485
NCS S 5000-N / LRV 26%



14235 201 ⑤ 14682 201
NCS S 3005-Y20R / LRV 34%




14235 460
NCS S 4010-B70G / LRV 23%



14235 265
NCS S 4020-B10G / LRV 20%




14235 473 ⑤ 14682 473
NCS S 6005-Y80R / LRV 16%



14235 495
NCS S 4010-G90Y / LRV 25%



14225 357
NCS S 2010-G60Y / LRV 36%




14235 258
NCS S 5010-G30Y / LRV 19%




14235 766 ⑤ 14682 766
NCS S 6020-B / LRV 12%




14225 393
NCS S 3000-N / LRV 35%



14225 303 ⑤ 14683 303
NCS S 5005-Y20R / LRV 22%







14225 305
NCS S 5502-Y / LRV 15%



14235 486
NCS S 7000-N / LRV 11%



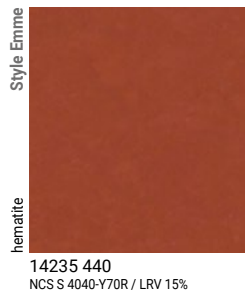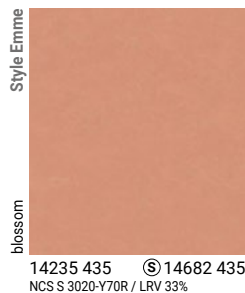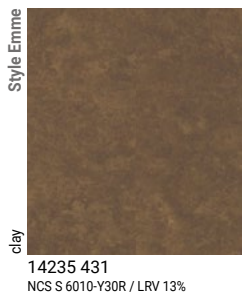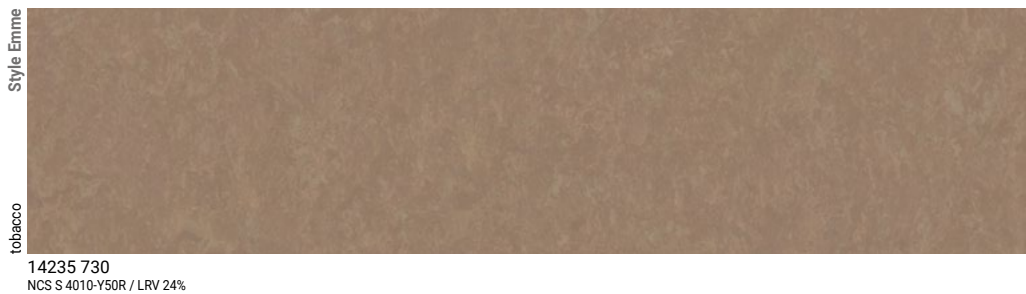



Natural yellowing effect: Due to its natural production process, linoleum may have a slight yellow tint when unpacked. This disappears within 24 hours of sunlight exposure but can reappear under furniture. It will disappear once exposed to daylight.

Crafted from natural ingredients and shaped through a distinctive production process, each linoleum surface displays subtle, non-repetitive variations in pattern and colour. As the images in this brochure may not fully reflect the material's complete richness, we recommend requesting a larger sample before making your final selection.

About Tarkett

With a history of more than 140 years, Tarkett is a worldwide leader in innovative and sustainable flooring and sports surface solutions, generating turnover of €3.3 billion in 2025. The Group has close to 12,000 employees, 25 R&D centers, 8 recycling centers and 33 production sites. Tarkett creates and manufactures solutions for hospitals, schools, housing, hotels, offices, stores and sports fields, serving customers in over 100 countries. To build "The Way to Better Floors," the Group is committed to circular economy and sustainability, in line with its Tarkett Human-Conscious Design® approach.

www.tarkett-group.com

© Tarkett, March 2026

Descriptions, colours and specifications are subject to change without notice. Tarkett is not responsible for typographical/photographical errors. Actual product may differ from illustration. All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication therefore does not convey nor imply any license under patent or other industrial or intellectual property rights. In case of doubt or differences of interpretation, the English version shall prevail over all other language versions.