


# Acczent Excellence Genius 70

## Datasheet

Classification	Norm	Tarkett Value
Product type	ISO 10582	Heterogeneous poly(vinyl chloride) floor coverings
Commercial classification	ISO 10874	34 Very Heavy
Industrial classification	ISO 10874	43 Heavy
Binder content	ISO 10582	Type I
Technical Characteristics	Norm	Tarkett Value
Wear layer thickness	EN ISO 24340	0,70 mm
Total thickness	EN ISO 24346	2,45 mm
Total weight	EN ISO 23997	3400 g/m <sup>2</sup>
Surface treatment		TEKTANIUM®
Installation method		Loose-Lay
Performance for CE Marking	Norm	Tarkett Value
Declaration of Performance #	EN 14041	0120-092-DOP-2019-12
Reaction to fire	EN ISO 13501-1	Bfl-s1 loose-lay on an A1fl and/or A2fl substrate Cfl-s1 loose-lay on a wooden sub-floor
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)
Thermal resistance	EN ISO 10456	0,02 m <sup>2</sup> ·K/W
Slip resistance (EN 13893)	EN 13893	Class DS (μ ≥ 0,30)
Technical Performance	Norm	Tarkett Value
Residual indentation	EN ISO 24343-1	≤ 0,10 mm Average measured value: 0,03 mm
Dimensional stability	EN ISO 23999	≤ 0.40 % Average measured value : ≤ 0.10 %
Slip resistance	DIN 51130	R10
Furniture leg	EN ISO 16581	No damage
Castor chair	EN ISO 4918	No damage
Curl resultant to heat	EN ISO 23999	≤  2  mm
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	EN ISO 26987	Not affected
Underfloor heating		Suitable (subfloor temperature maximum 27°C)
Sustainability performances	Norm	Tarkett Value
Recyclability through ReStart®		Offcuts / Post-use - Contact Tarkett for more information
Recycled content		23 %
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		5,65 kg CO <sub>2</sub> eq /m <sup>2</sup>
Total Carbon Footprint (EPD Modules A-D, incl. recycling scenario)		5,53 kg CO <sub>2</sub> eq /m <sup>2</sup>
Total VOC Emissions (after 28 days)	EN 16516	Platinum (≤ 10 μg/m <sup>3</sup> )
Formaldehyde emission	EN 717-1	E1
Dimensions and designs		
Roll		Roll 2 x 23 m
Number of designs available		25

Slip resistance : R10 only for Long Mordern Oak, OakTree, Scandinavian Oak and Serene Oak designs

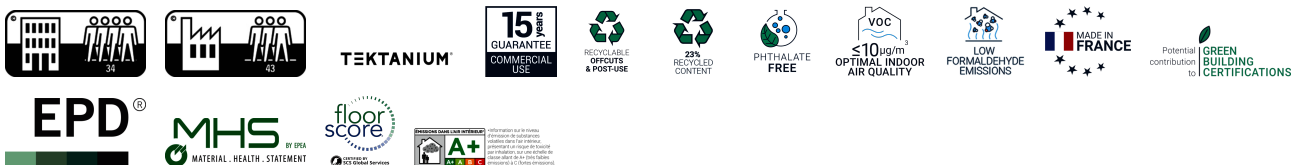

The above information is subject to modification for the benefit of further improvement (19/03/2026). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com>. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.