

Grace

Datasheet



INSTALLATION

- Installation method: 2-lock for floating or glue down
- Installation instruction: Download from www.tarkett.com. Contact your supplier for more details
- Underfloor heating compatible. Maximum floor surface temperature 27°C with self-regulating underfloor heating system
- Start & Stop: Shorter lengths of planks included in approx. 1 pack per 20 m²

MAINTENANCE

These Tarkett wooden floors have a Proteco surface treatment and therefore a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details.

Always make sure to follow the most recently updated maintenance instructions on www.tarkett.com.

RECOMMENDED ACCESSORIES

- Installation: Tarkofoam II / Tarkoflex II / Installation kit
- Aesthetics: Skirting, Transition moulding, Pipe covers
- Care & maintenance: Tarkoclean for lacquered floors, Refresher for lacquered floors

See more alternatives and the complete range of accessories @ www.tarkett.com

Product Name	Product Code	Page
Grace - OAK CENTURY (Basket weave)	7806019	3
Grace - OAK ERA (Basket weave)	7806020	4
Grace - OAK NATURE TRES (3-strip)	7870073	5
Grace - OAK SOFT SKIN TRES (3-strip)	7870074	6
Grace - OAK WHITE LACE TRES (3-strip)	7870075	7
Grace - OAK WHITE CANVAS TRES (3-strip)	7870076	8
Grace - OAK SOFT SKIN PLANK (1-strip)	7876123	9
Grace - OAK WHITE CANVAS PLANK (1-strip)	7876124	10
Grace - OAK GREY CHIFFON PLANK (1-strip)	7876125	11
Grace - OAK RUSTIC PLANK XT (1-strip)	7877067	12
Grace - OAK WHITE LACE PLANK XT (1-strip)	7877068	13
Grace - OAK BEIGE CASHMERE PLANK XT (1-strip)	7877069	14

Grace - OAK CENTURY (Basket weave)

Datasheet


Product Information	Tarkett Value
Material code	7806019
Format	Plank 192 x 2028 mm
Pattern	(Basket weave)
Surface treatment	Proteco ExtraMatt
Surface effect	Brushed
Wear layer thickness	3,5 mm
Total thickness	16 mm
Items per box	6
Surface per box	2,34 m ²
Surface per pallet	81,9 m ²
Net weight	9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0123
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-3,11 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	27 / 5

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.132	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.152	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.172	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.121	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 4-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

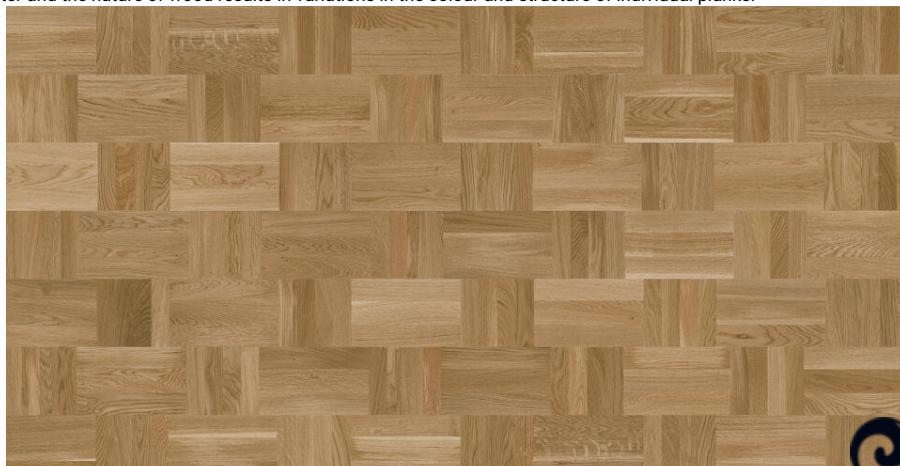

Grace - OAK ERA (Basket weave)

Datasheet


Product Information	Tarkett Value
Material code	7806020
Format	Plank 192 x 2028 mm
Pattern	(Basket weave)
Surface treatment	Proteco ExtraMatt
Surface effect	Brushed
Wear layer thickness	3,5 mm
Total thickness	16 mm
Items per box	6
Surface per box	2,34 m ²
Surface per pallet	81,9 m ²
Net weight	9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0123
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-3,11 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	39 / 3

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.132	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.152	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.172	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.121	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 4-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

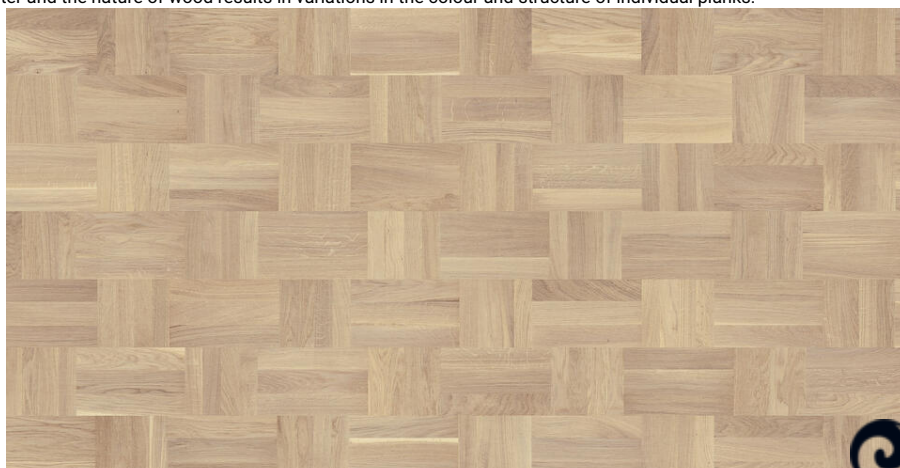

Grace - OAK NATURE TRES (3-strip)

Datasheet


Product Information	Tarkett Value
Material code	7870073
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco ExtraMatt
Surface effect	Brushed
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0146
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-1,44 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	25 / 5

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

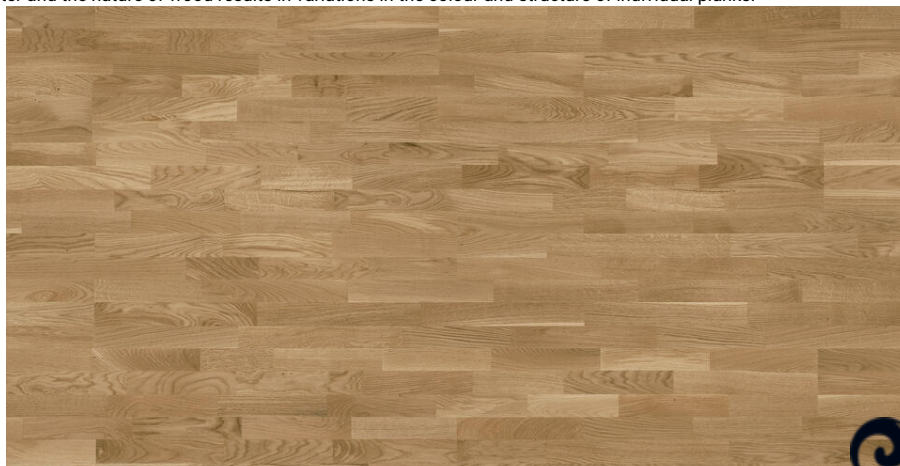

Grace - OAK SOFT SKIN TRES (3-strip)

Datasheet


Product Information	Tarkett Value
Material code	7870074
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco ExtraMatt
Surface effect	Brushed
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0146
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-1,44 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	40 / 3

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

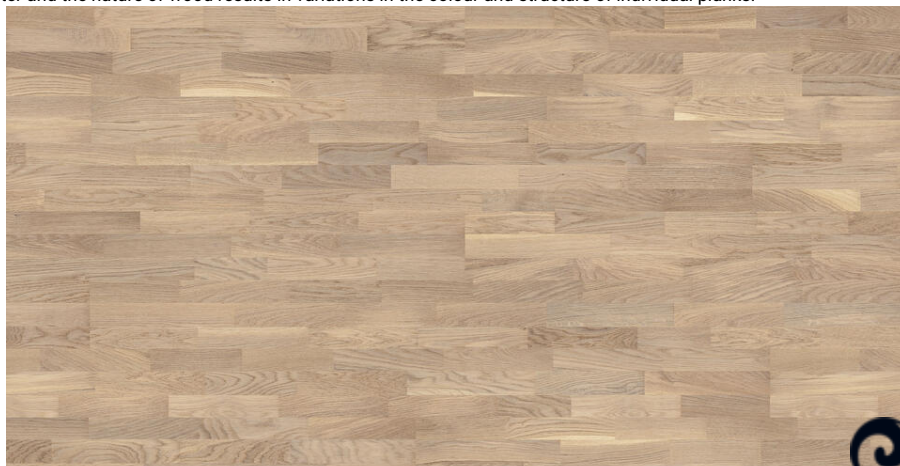

Grace - OAK WHITE LACE TRES (3-strip)

Datasheet


Product Information	Tarkett Value
Material code	7870075
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco ExtraMatt
Surface effect	Brushed
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0146
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-1,44 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	56 / 3

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

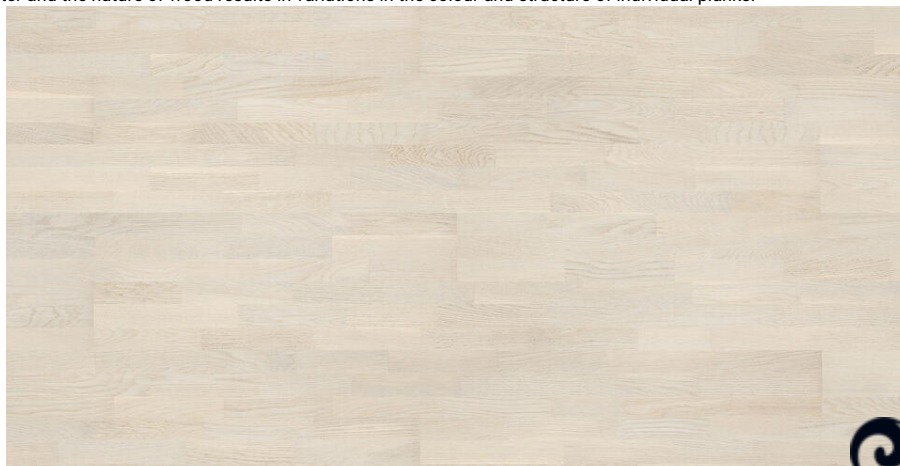

Grace - OAK WHITE CANVAS TRES (3-strip)

Datasheet


Product Information	Tarkett Value
Material code	7870076
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco ExtraMatt
Surface effect	Brushed
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0146
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-1,44 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	39 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

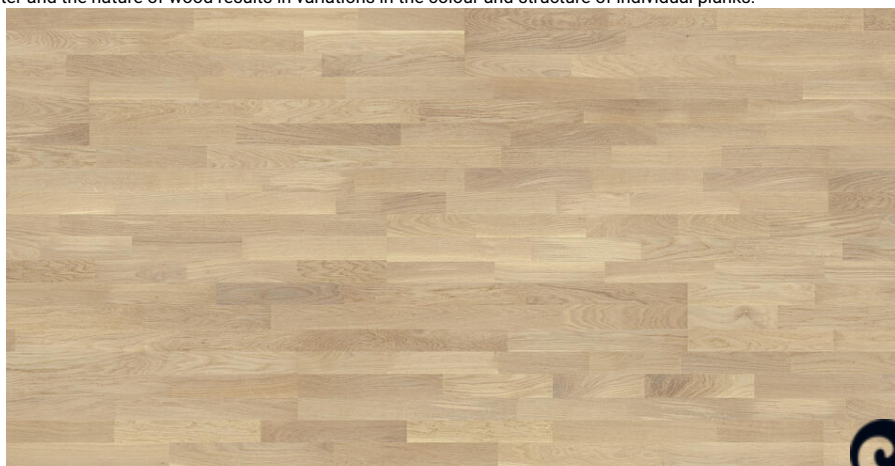

Grace - OAK SOFT SKIN PLANK (1-strip)

Datasheet


Product Information	Tarkett Value
Material code	7876123
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco ExtraMatt
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,14 m ²
Surface per pallet	77,04 m ²
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	40 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

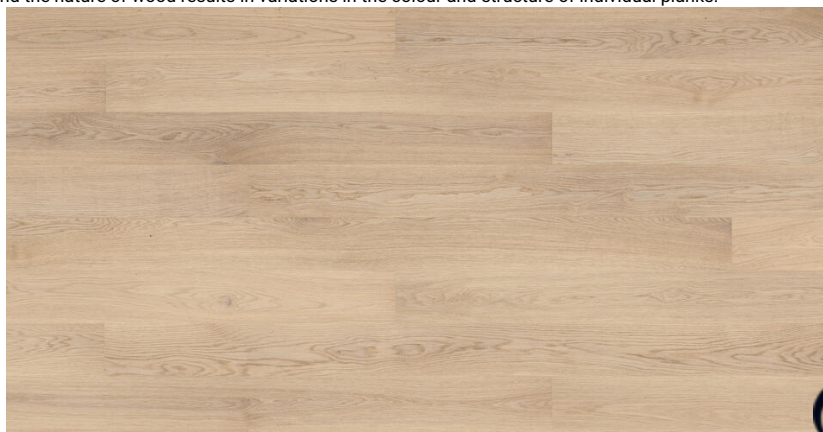

Grace - OAK WHITE CANVAS PLANK (1-strip)

Datasheet


Product Information	Tarkett Value
Material code	7876124
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco ExtraMatt
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,14 m ²
Surface per pallet	77,04 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	41 / 3

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

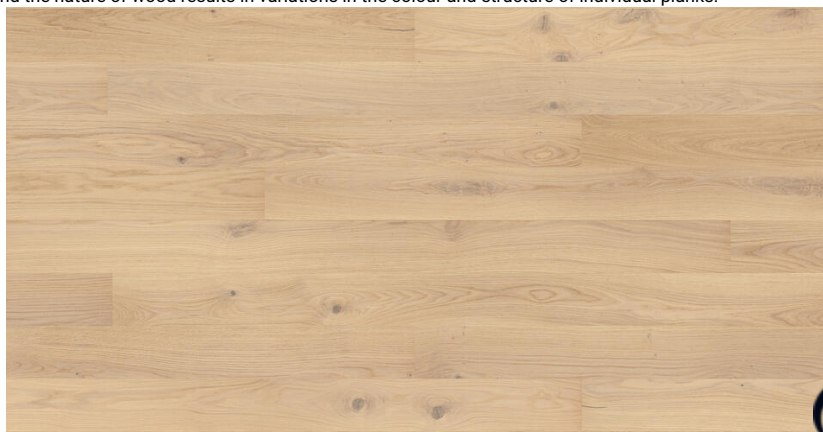

Grace - OAK GREY CHIFFON PLANK (1-strip)

Datasheet


Product Information	Tarkett Value
Material code	7876125
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco ExtraMatt
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,14 m ²
Surface per pallet	77,04 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	36 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

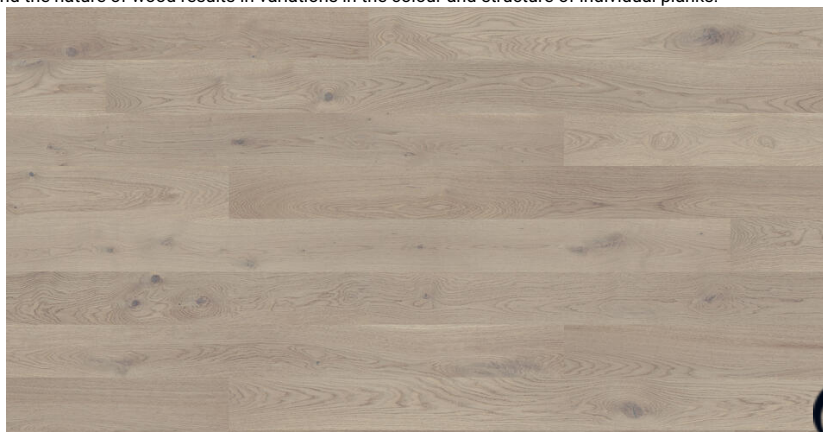

Grace - OAK RUSTIC PLANK XT (1-strip)

Datasheet


Product Information	Tarkett Value
Material code	7877067
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco ExtraMatt
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,51 m ²
Surface per pallet	87,85 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	32 / 5

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

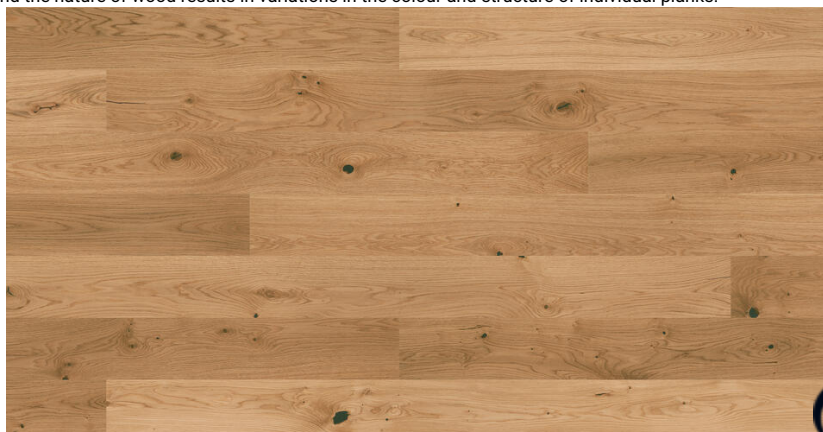

Grace - OAK WHITE LACE PLANK XT (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7877068
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco ExtraMatt
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,51 m ²
Surface per pallet	87,85 m ²
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	57 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Grace - OAK BEIGE CASHMERE PLANK XT (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7877069
Format	Plank 190 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco ExtraMatt
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,28 m ²
Surface per pallet	79,8 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	32 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

