

Prestige

Datasheet



INSTALLATION

- Installation method: 2-lock for floating or glue down
- Installation instruction: Download from www.tarkett.com. Contact your supplier for more details
- Underfloor heating compatible. Maximum floor surface temperature 27°C with self-regulating underfloor heating system
- Start & Stop: Shorter lengths of planks included in approx. 1 pack per 20 m²

MAINTENANCE

These Tarkett wooden floors have a Proteco surface treatment and therefore a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details.

Always make sure to follow the most recently updated maintenance instructions on www.tarkett.com.

RECOMMENDED ACCESSORIES

- Installation: Tarkofoam II / Tarkoflex II / Installation kit
- Aesthetics: Skirting, Transition moulding, Pipe covers
- Care & maintenance: Tarkoclean for hardwax oiled floors, Refresher for hardwax oiled floors

See more alternatives and the complete range of accessories @ www.tarkett.com

Product Name	Product Code	Page
Prestige - OAK SATIN WHITE (1-strip)	7876031	3
Prestige - OAK SATIN WHITE (1-strip)	7876094	4
Prestige - OAK DEEP BROWN (1-strip)	7876129	5
Prestige - OAK GREY SLATE (1-strip)	7876970	6
Prestige - OAK BOARDWALK (1-strip)	7877048	7
Prestige - OAK GRAPHITE (1-strip)	7877055	8
Prestige - OAK SCALLOP (1-strip)	7877066	9
Prestige - ASH SEASHELL (1-strip)	7967018	10

Prestige - OAK SATIN WHITE (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7876031
Format	Plank 162 x 2000 mm
Pattern	(1-strip)
Surface treatment	Protoco Hardwax Oil
Surface effect	None
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	1,94 m ²
Surface per pallet	69,84 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	43 / 3


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m ² K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m ² K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m ² K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction Softwood Veneer and Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

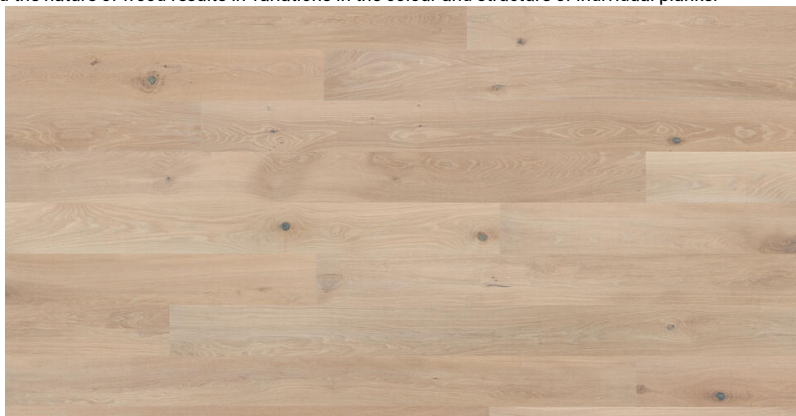

Prestige - OAK SATIN WHITE (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7876094
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Protoco Hardwax Oil
Surface effect	None
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,14 m ²
Surface per pallet	77,04 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	43 / 3

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

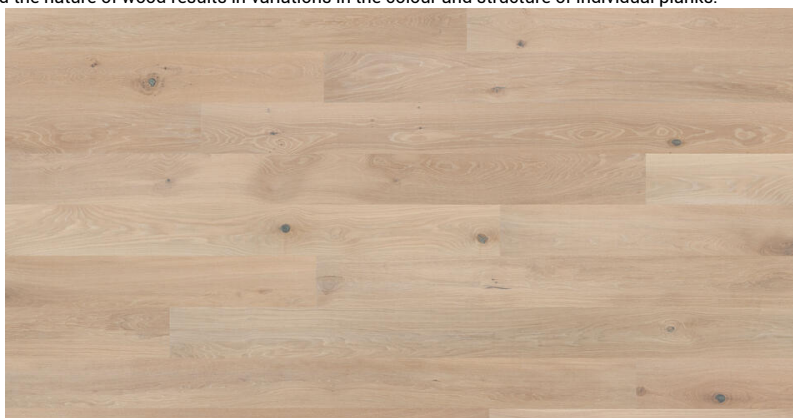

Prestige - OAK DEEP BROWN (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7876129
Format	Plank 162 x 2000 mm
Pattern	(1-strip)
Surface treatment	Protoco Hardwax Oil
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	1,94 m ²
Surface per pallet	69,84 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	11 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction
Softwood Veneer and Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Prestige - OAK GREY SLATE (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7876970
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Protoco Hardwax Oil
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,14 m ²
Surface per pallet	77,04 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	46 / 2

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

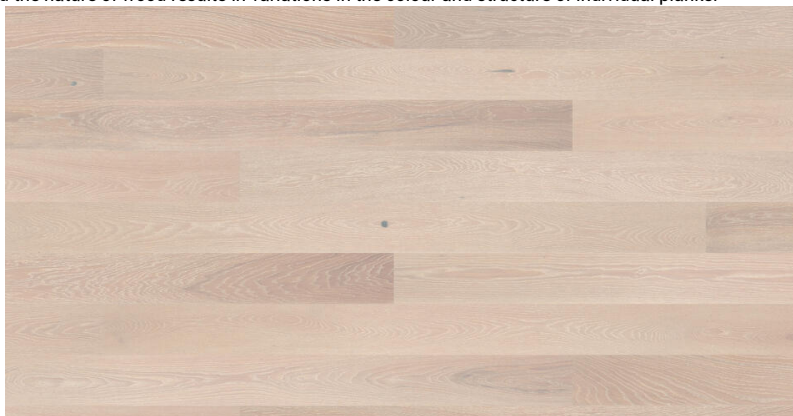

Prestige - OAK BOARDWALK (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7877048
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Protoco Hardwax Oil
Surface effect	Antique brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,51 m ²
Surface per pallet	87,85 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	27 / 3

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m ² K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m ² K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m ² K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

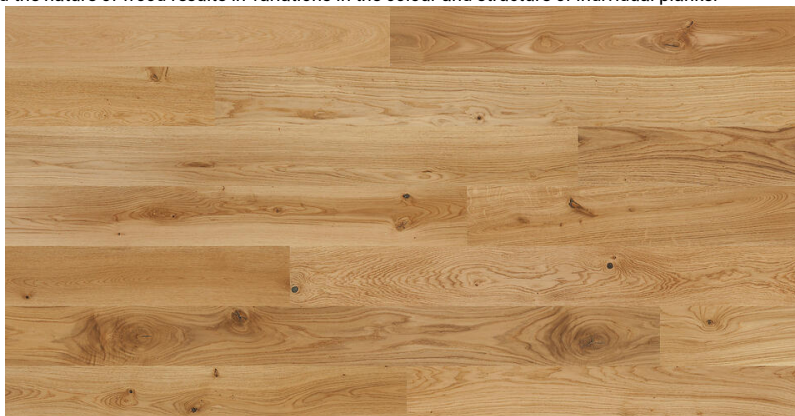

Prestige - OAK GRAPHITE (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7877055
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Hardwax Oil
Surface effect	Antique brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,51 m ²
Surface per pallet	87,85 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	18 / 3

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Prestige - OAK SCALLOP (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7877066
Format	Plank 190 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Hardwax Oil
Surface effect	Antique brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,28 m ²
Surface per pallet	79,8 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	16 / 3


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m ² K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m ² K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m ² K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction Softwood Veneer and Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

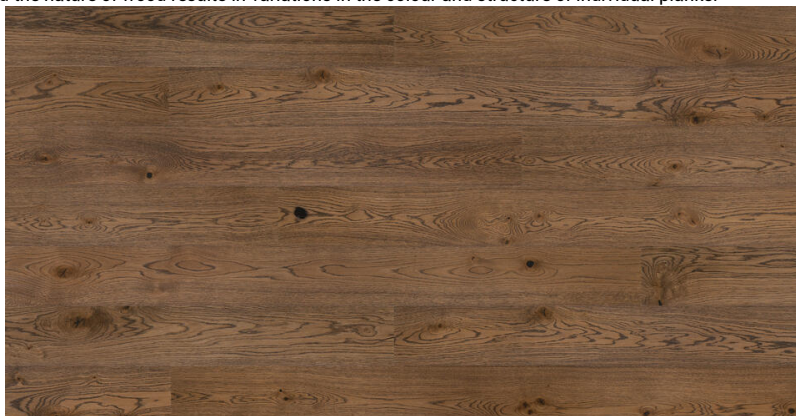

Prestige - ASH SEASHELL (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7967018
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Protoco Hardwax Oil
Surface effect	Antique brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,14 m ²
Surface per pallet	77,04 m ²
Net weight	7,9 kg
Character	Expressive
Latin Name	Fraxinus Angustifolia
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	63 / 7

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	4	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m ² K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m ² K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m ² K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

