

Professional (13-14 mm)

Datasheet



INSTALLATION

- Installation method: 2-lock for floating or glue down
- Installation instruction: Download from www.tarkett.com. Contact your supplier for more details
- Underfloor heating compatible. Maximum floor surface temperature 27°C with self-regulating underfloor heating system
- Start & Stop: Shorter lengths of planks included in approx. 1 pack per 20 m²

MAINTENANCE

These Tarkett wooden floors have a Proteco surface treatment and therefore a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details.

Always make sure to follow the most recently updated maintenance instructions on www.tarkett.com.

RECOMMENDED ACCESSORIES

- Installation: Tarkofoam II / Tarkoflex II / Installation kit
- Aesthetics: Skirting, Transition moulding, Pipe covers
- Care & maintenance: Tarkoclean for lacquered floors, Refresher for lacquered floors

See more alternatives and the complete range of accessories @ www.tarkett.com

Product Name	Product Code	Page
Professional (13-14 mm) - OAK NATURE TRES (3-strip)	7870077	3
Professional (13-14 mm) - OAK NATURE TRES (3-strip)	7870078	4
Professional (13-14 mm) - OAK NATURE WHITE TRES (3-strip)	7870079	5
Professional (13-14 mm) - OAK ROBUST TRES (3-strip)	7870080	6
Professional (13-14 mm) - OAK ROBUST WHITE TRES (3-strip)	7870081	7
Professional (13-14 mm) - ASH CONTRAST TRES (3-strip)	7965016	8
Professional (13-14 mm) - ASH CONTRAST WHITE TRES (3-strip)	7965017	9
Professional (13-14 mm) - ASH NATURE TRES (3-strip)	7965018	10
Professional (13-14 mm) - ASH NATURE WHITE TRES (3-strip)	7965019	11
Professional (13-14 mm) - OAK NATURE TRES 2027 (3-strip)	8721007	12
Professional (13-14 mm) - OAK NATURE TRES 2027 (3-strip)	8722014	13
Professional (13-14 mm) - OAK NATURE TRES 2027 (3-strip)	8722015	14

Professional (13-14 mm) - OAK NATURE TRES (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	7870077
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Lacquer
Surface effect	None
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,3 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0106
EPD Number	S-P-01509
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	27 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	4000	EN 13696
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Professional (13-14 mm) - OAK NATURE TRES (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	7870078
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,3 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0106
EPD Number	S-P-01509
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	26 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	3500	EN 13696
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Professional (13-14 mm) - OAK NATURE WHITE TRES (3-strip)

Datasheet


Product Information	Tarkett Value
Material code	7870079
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,3 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0106
EPD Number	S-P-01509
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	39 / 5

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

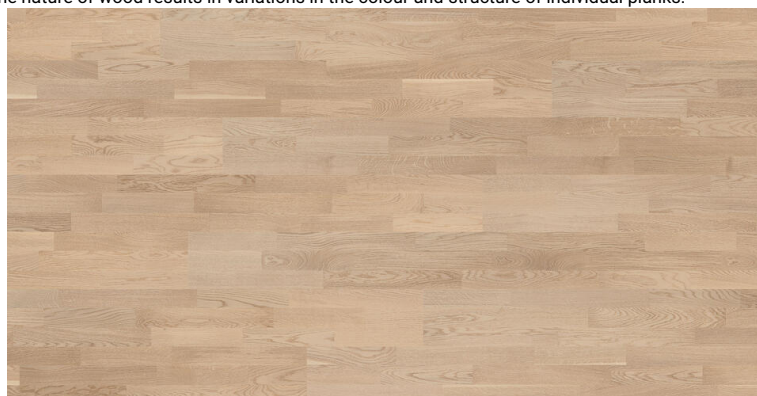

Professional (13-14 mm) - OAK ROBUST TRES (3-strip)

Datasheet


Product Information	Tarkett Value
Material code	7870080
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,3 kg
Character	Expressive
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0106
EPD Number	S-P-01509
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	33 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	3500	EN 13696
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

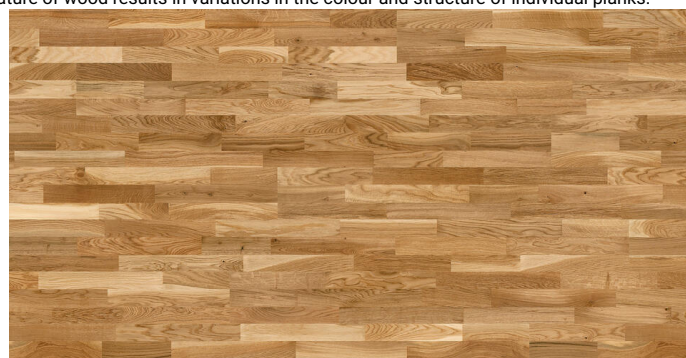

Professional (13-14 mm) - OAK ROBUST WHITE TRES (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	7870081
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,3 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0106
EPD Number	S-P-01509
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	42 / 10

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Professional (13-14 mm) - ASH CONTRAST TRES (3-strip)

Datasheet


Product Information	Tarkett Value
Material code	7965016
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,3 kg
Character	Expressive
Latin Name	Fraxinus Angustifolia
Declaration of Performance #	0020-0106
EPD Number	S-P-01509
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	46 / 5

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	4	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	3500	EN 13696
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

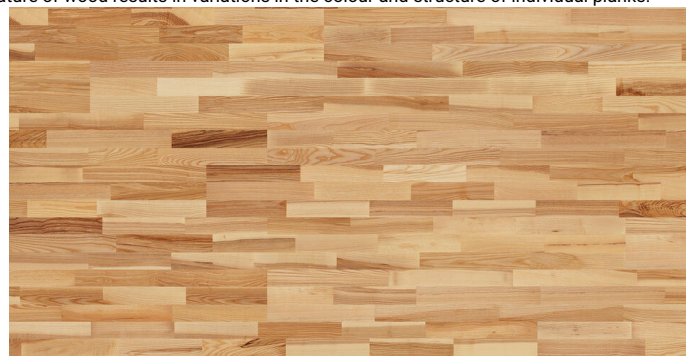

Professional (13-14 mm) - ASH CONTRAST WHITE TRES (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	7965017
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,3 kg
Character	Expressive
Latin Name	Fraxinus Angustifolia
Declaration of Performance #	0020-0106
EPD Number	S-P-01509
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	48 / 6

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	4	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Professional (13-14 mm) - ASH NATURE TRES (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	7965018
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,3 kg
Character	Lively
Latin Name	Fraxinus Angustifolia
Declaration of Performance #	0020-0106
EPD Number	S-P-01509
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	58 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	4	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	3500	EN 13696
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Professional (13-14 mm) - ASH NATURE WHITE TRES (3-strip)

Datasheet


Product Information	Tarkett Value
Material code	7965019
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,3 kg
Character	Lively
Latin Name	Fraxinus Angustifolia
Declaration of Performance #	0020-0106
EPD Number	S-P-01509
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	61 / 5

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	4	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

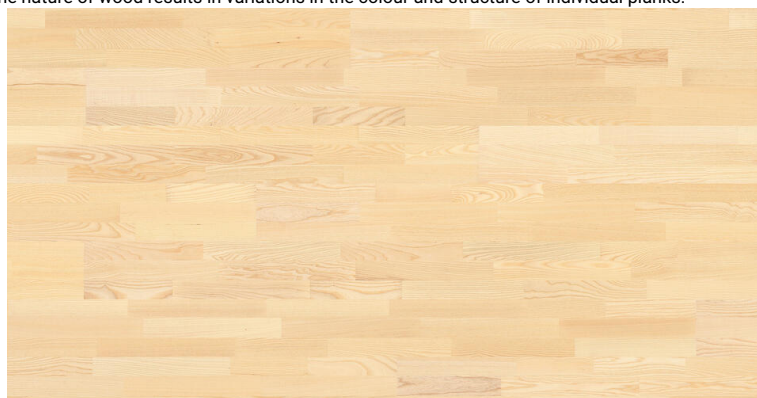

Professional (13-14 mm) - OAK NATURE TRES 2027 (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	8721007
Format	Plank 194 x 2027 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,36 m ²
Surface per pallet	94,4 m ²
Net weight	7,4 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0106
EPD Number	S-P-01509
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	26 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	3500	EN 13696
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Professional (13-14 mm) - OAK NATURE TRES 2027 (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	8722014
Format	Plank 194 x 2027 mm
Pattern	(3-strip)
Surface treatment	Proteco Lacquer
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,36 m ²
Surface per pallet	94,4 m ²
Net weight	6,7 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	S-P-01509
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	27 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	4000	EN 13696
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Professional (13-14 mm) - OAK NATURE TRES 2027 (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	8722015
Format	Plank 194 x 2027 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,36 m ²
Surface per pallet	94,4 m ²
Net weight	6,7 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	S-P-01509
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	26 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	3500	EN 13696
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

