

# Segno

## Datasheet



### INSTALLATION

- Installation method: glue down
- Installation instruction: Download from [www.tarkett.com](http://www.tarkett.com). Contact your supplier for more details
- Underfloor heating compatible. Maximum floor surface temperature 27°C with self-regulating underfloor heating system

### MAINTENANCE

These Tarkett wooden floors have a Proteco surface treatment and therefore a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details.

Always make sure to follow the most recently updated maintenance instructions on [www.tarkett.com](http://www.tarkett.com).

### RECOMMENDED ACCESSORIES

- Installation: Adhesive as recommended in installation instruction
- Aesthetics: Skirting, Transition moulding, Pipe covers
- Care & maintenance: Tarkoclean for hardwax oiled floors, Refresher for hardwax oiled floors

---

See more alternatives and the complete range of accessories @ [www.tarkett.com](http://www.tarkett.com)

---

Product Name	Product Code	Page
Segno - OAK LIME STONE (Herringbone)	41020031	<a href="#">3</a>
Segno - OAK LIME STONE (Herringbone)	41020032	<a href="#">4</a>
Segno - OAK BLONDE (Herringbone)	41020033	<a href="#">5</a>
Segno - OAK BLONDE (Herringbone)	41020034	<a href="#">6</a>
Segno - OAK (Herringbone)	41020035	<a href="#">7</a>
Segno - OAK (Herringbone)	41020036	<a href="#">8</a>
Segno - OAK OLD GREY (Herringbone)	41020037	<a href="#">9</a>
Segno - OAK OLD GREY (Herringbone)	41020038	<a href="#">10</a>
Segno - OAK OLD BROWN (Herringbone)	41020039	<a href="#">11</a>
Segno - OAK OLD BROWN (Herringbone)	41020040	<a href="#">12</a>

# Segno - OAK LIME STONE (Herringbone)

## Datasheet


Product Information	Tarkett Value
Code	41020031
Format	Plank 600x120mm Left
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	2 sides mini bevels
Wear layer thickness	3.5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2.304 m <sup>2</sup>
Surface per pallet	69.12 m <sup>2</sup>
Net weight	7.16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance	0020-0144
LRV - overall average / Standard deviation	45 / 3

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Thermal insulation value : board only (RT m2 K/W)	0.065	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

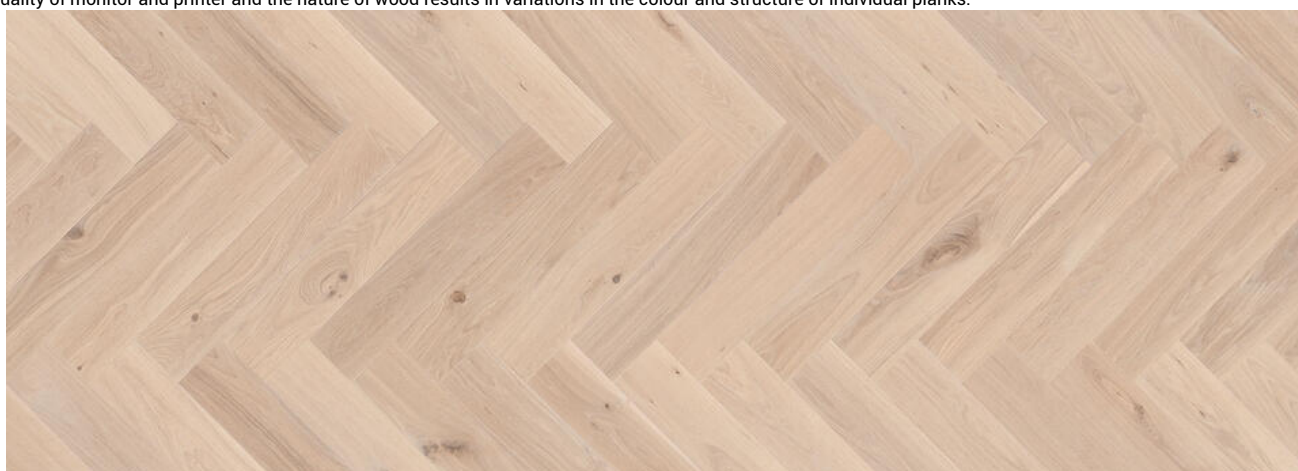

# Segno - OAK LIME STONE (Herringbone)

## Datasheet


Product Information	Tarkett Value
Code	41020032
Format	Plank 600x120mm Right
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	2 sides mini bevels
Wear layer thickness	3.5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2.304 m <sup>2</sup>
Surface per pallet	69.12 m <sup>2</sup>
Net weight	7.16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance	0020-0144
LRV - overall average / Standard deviation	45 / 3

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Thermal insulation value : board only (RT m2 K/W)	0.065	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

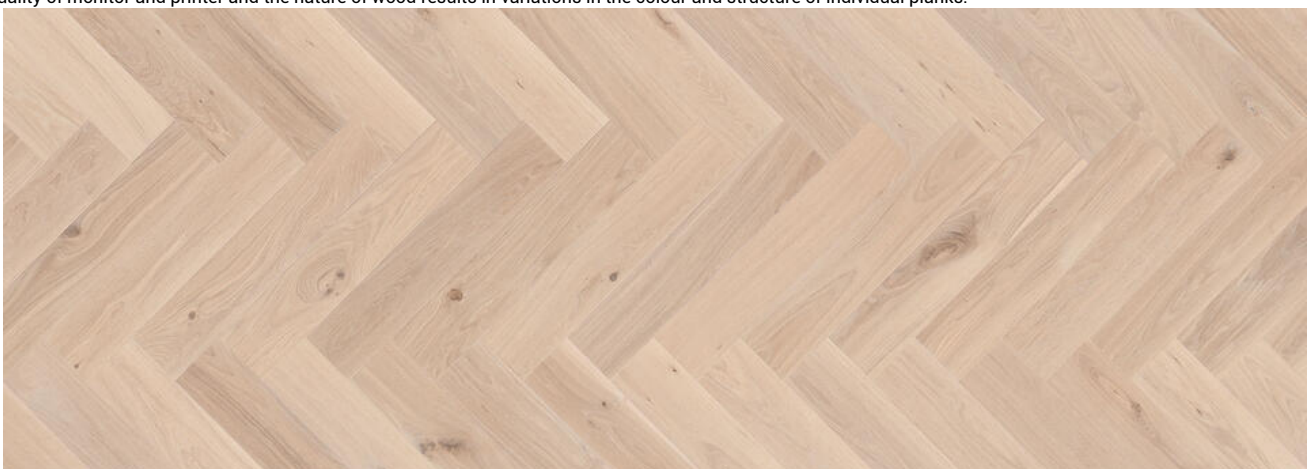

# Segno - OAK BLONDE (Herringbone)

## Datasheet


Product Information	Tarkett Value
Code	41020033
Format	Plank 600x120mm Left
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	2 sides mini bevels
Wear layer thickness	3.5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2.304 m <sup>2</sup>
Surface per pallet	69.12 m <sup>2</sup>
Net weight	7.16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance	0020-0144
LRV - overall average / Standard deviation	38 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Thermal insulation value : board only (RT m2 K/W)	0.065	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

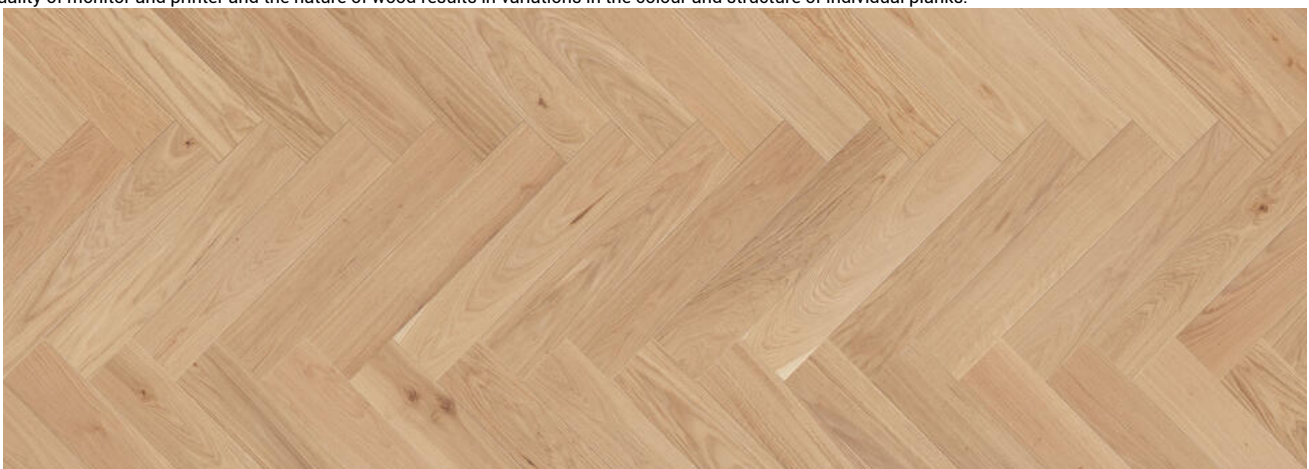

# Segno - OAK BLONDE (Herringbone)

## Datasheet


Product Information	Tarkett Value
Code	41020034
Format	Plank 600x120mm Right
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	2 sides mini bevels
Wear layer thickness	3.5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2.304 m <sup>2</sup>
Surface per pallet	69.12 m <sup>2</sup>
Net weight	7.16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance	0020-0144
LRV - overall average / Standard deviation	38 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Thermal insulation value : board only (RT m2 K/W)	0.065	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

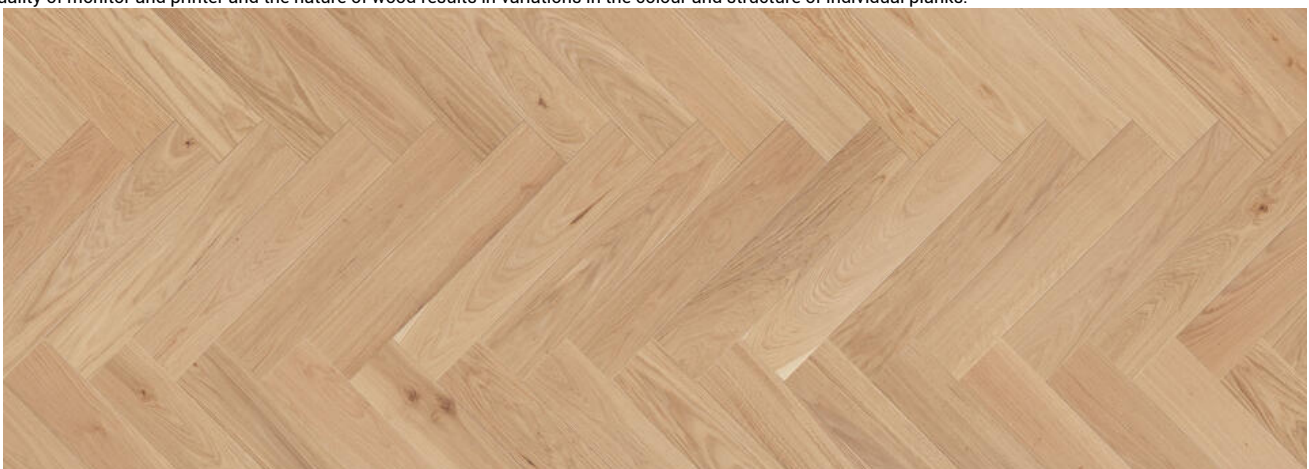

# Segno - OAK (Herringbone)

## Datasheet

Product Information	Tarkett Value
Code	41020035
Format	Plank 600x120mm Left
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	2 sides mini bevels
Wear layer thickness	3.5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2.304 m <sup>2</sup>
Surface per pallet	69.12 m <sup>2</sup>
Net weight	7.16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance	0020-0144
LRV - overall average / Standard deviation	33 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Thermal insulation value : board only (RT m2 K/W)	0.065	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Segno - OAK (Herringbone)

## Datasheet

Product Information	Tarkett Value
Code	41020036
Format	Plank 600x120mm Right
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	2 sides mini bevels
Wear layer thickness	3.5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2.304 m <sup>2</sup>
Surface per pallet	69.12 m <sup>2</sup>
Net weight	7.16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance	0020-0144
LRV - overall average / Standard deviation	33 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Thermal insulation value : board only (RT m2 K/W)	0.065	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Segno - OAK OLD GREY (Herringbone)

## Datasheet


Product Information	Tarkett Value
Code	41020037
Format	Plank 600x120mm Left
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	2 sides mini bevels
Wear layer thickness	3.5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2.304 m <sup>2</sup>
Surface per pallet	69.12 m <sup>2</sup>
Net weight	7.16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance	0020-0144
LRV - overall average / Standard deviation	25 / 1

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Thermal insulation value : board only (RT m2 K/W)	0.065	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

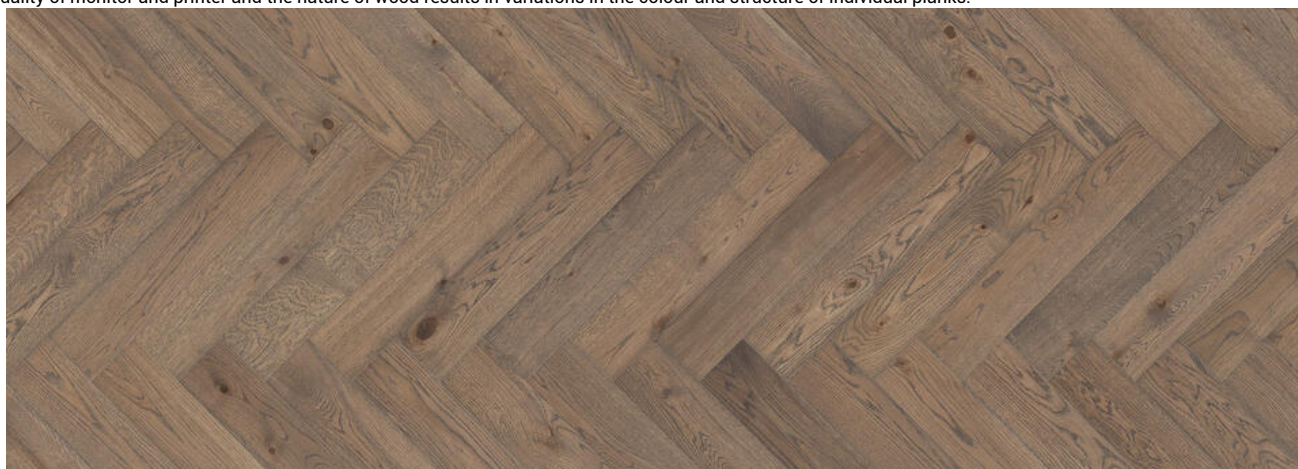

# Segno - OAK OLD GREY (Herringbone)

## Datasheet


Product Information	Tarkett Value
Code	41020038
Format	Plank 600x120mm Right
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	2 sides mini bevels
Wear layer thickness	3.5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2.304 m <sup>2</sup>
Surface per pallet	69.12 m <sup>2</sup>
Net weight	7.16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance	0020-0144
LRV - overall average / Standard deviation	25 / 1

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Thermal insulation value : board only (RT m2 K/W)	0.065	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

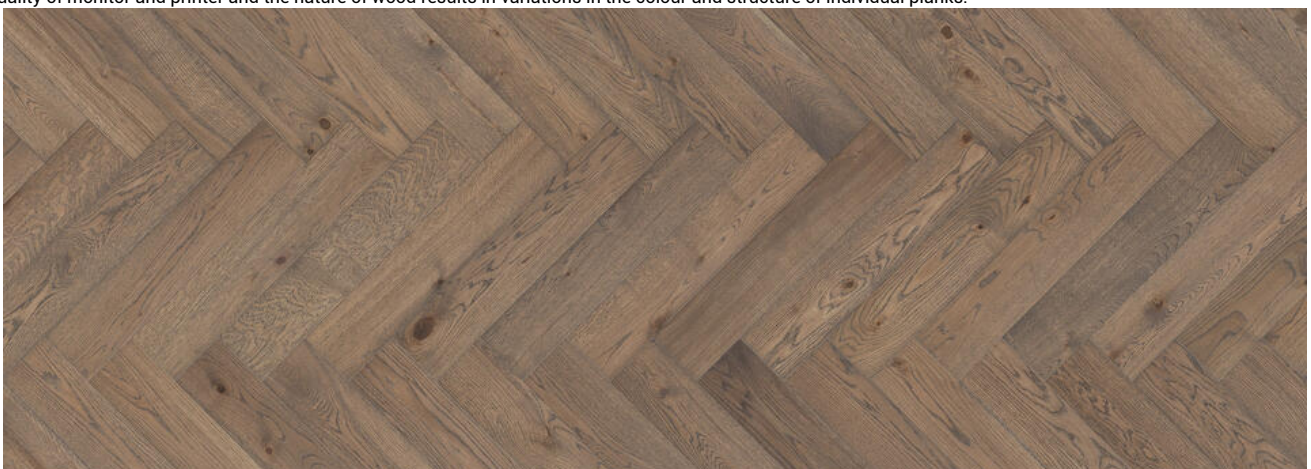

# Segno - OAK OLD BROWN (Herringbone)

## Datasheet


Product Information	Tarkett Value
Code	41020039
Format	Plank 600x120mm Left
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	2 sides mini bevels
Wear layer thickness	3.5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2.304 m <sup>2</sup>
Surface per pallet	69.12 m <sup>2</sup>
Net weight	7.16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance	0020-0144
LRV - overall average / Standard deviation	12 / 1

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Thermal insulation value : board only (RT m2 K/W)	0.065	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

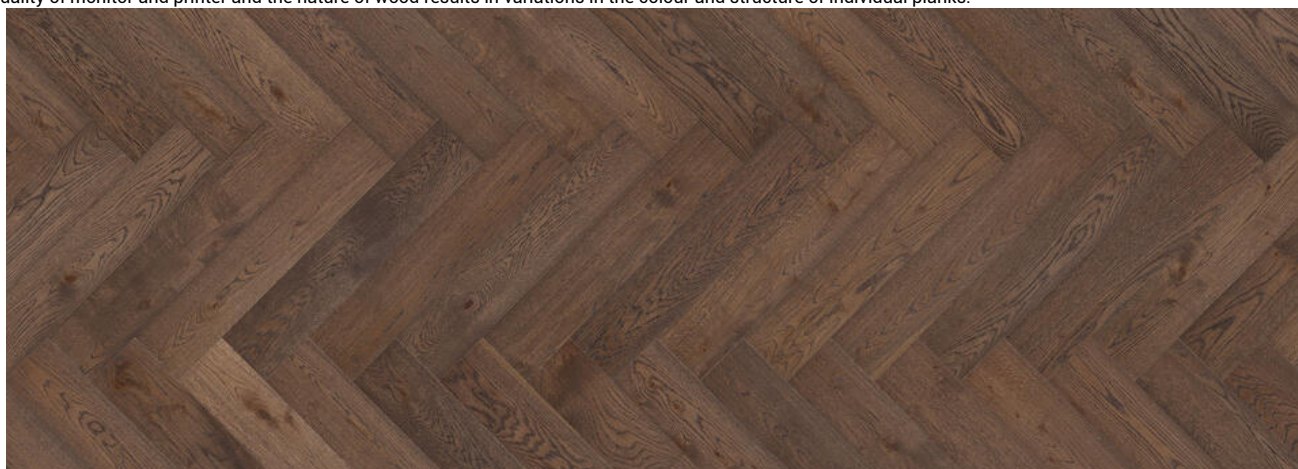

# Segno - OAK OLD BROWN (Herringbone)

## Datasheet

Product Information	Tarkett Value
Code	41020040
Format	Plank 600x120mm Right
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	2 sides mini bevels
Wear layer thickness	3.5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2.304 m <sup>2</sup>
Surface per pallet	69.12 m <sup>2</sup>
Net weight	7.16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance	0020-0144
LRV - overall average / Standard deviation	12 / 1

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Thermal insulation value : board only (RT m2 K/W)	0.065	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

