

Segno

Datasheet



INSTALLATION

- Installation method: glue down
- Installation instruction: Download from www.tarkett.com. Contact your supplier for more details
- Underfloor heating compatible. Maximum floor surface temperature 27°C with self-regulating underfloor heating system

MAINTENANCE

These Tarkett wooden floors have a Proteco surface treatment and therefore a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details.

Always make sure to follow the most recently updated maintenance instructions on www.tarkett.com.

RECOMMENDED ACCESSORIES

- Installation: Adhesive as recommended in installation instruction
- Aesthetics: Skirting, Transition moulding, Pipe covers
- Care & maintenance: Tarkoclean for hardwax oiled floors, Refresher for hardwax oiled floors

See more alternatives and the complete range of accessories @ www.tarkett.com

| Product Name | Product Code | Page |
|--------------------------------------|--------------|--------------------|
| Segno - OAK LIME STONE (Herringbone) | 41020031 | 6 |
| Segno - OAK LIME STONE (Herringbone) | 41020032 | 7 |
| Segno - OAK BLONDE (Herringbone) | 41020033 | 8 |
| Segno - OAK BLONDE (Herringbone) | 41020034 | 9 |
| Segno - OAK (Herringbone) | 41020035 | 10 |
| Segno - OAK (Herringbone) | 41020036 | 11 |
| Segno - OAK OLD GREY (Herringbone) | 41020037 | 12 |
| Segno - OAK OLD GREY (Herringbone) | 41020038 | 3 |
| Segno - OAK OLD BROWN (Herringbone) | 41020039 | 4 |
| Segno - OAK OLD BROWN (Herringbone) | 41020040 | 5 |

Segno - OAK LIME STONE (Herringbone)

Datasheet


| Product Information | Tarkett Value |
|--|---------------------------------|
| Material code | 41020031 |
| Format | Plank 600x120mm Left |
| Pattern | (Herringbone) |
| Surface treatment | Proteco Hardwax Oil |
| Surface effect | Brushed |
| Bevelled edges | 4-side minibevel |
| Wear layer thickness | 3,5 mm |
| Total thickness | 11 mm |
| Items per box | 32 |
| Surface per box | 2,304 m ² |
| Surface per pallet | 69,12 m ² |
| Net weight | 7,16 kg |
| Character | Lively |
| Latin Name | Quercus Robur & Quercus Petraea |
| Declaration of Performance # | 0020-0144 |
| LRV - overall average / Standard deviation | 45 / 3 |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance | Tarkett Value | Norm |
|---|-------------------------|--------------------------|
| Reaction to fire | Cfl-s1 | EN 14342 - Table 1 |
| Formaldehyde emission | E1 | EN 14342 |
| Brinell hardness (average value) | 3.7 | (BHN) EN 1534 |
| Thermal insulation value : board only (RT m2 K/W) | 0.065 | EN ISO 10456:2007 |
| Thermal conductivity (W/m K) | 0.17 | EN 12664 / EN 14342:2013 |
| Slip Resistance (EN 16165 Annex C) | Low risk of slip | BS 7976-2 |
| Construction | Plywood Support 2-layer | |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

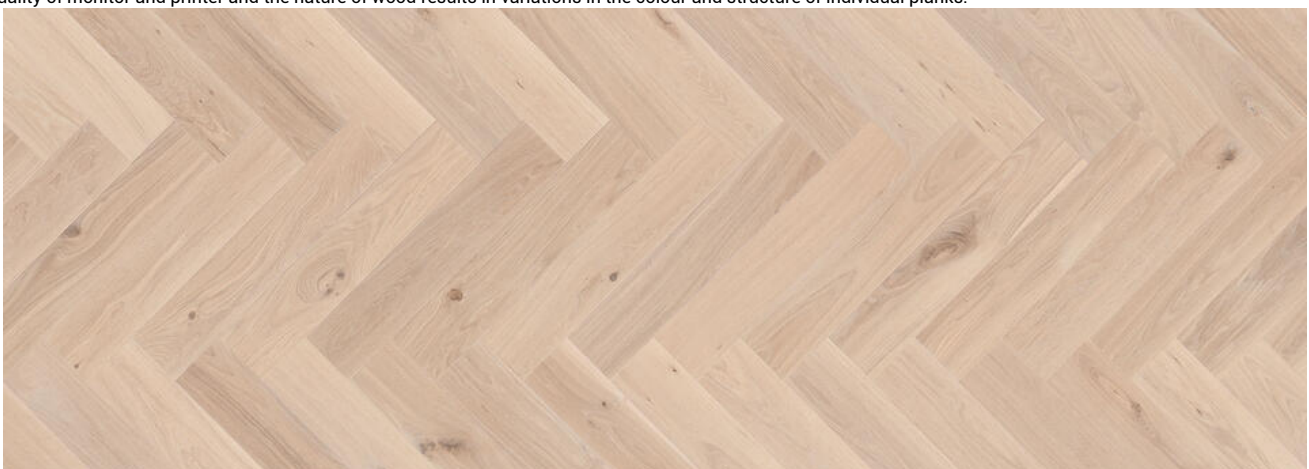

Segno - OAK LIME STONE (Herringbone)

Datasheet


| Product Information | Tarkett Value |
|--|---------------------------------|
| Material code | 41020032 |
| Format | Plank 600x120mm Right |
| Pattern | (Herringbone) |
| Surface treatment | Proteco Hardwax Oil |
| Surface effect | Brushed |
| Bevelled edges | 4-side minibevel |
| Wear layer thickness | 3,5 mm |
| Total thickness | 11 mm |
| Items per box | 32 |
| Surface per box | 2,304 m ² |
| Surface per pallet | 69,12 m ² |
| Net weight | 7,16 kg |
| Character | Lively |
| Latin Name | Quercus Robur & Quercus Petraea |
| Declaration of Performance # | 0020-0144 |
| LRV - overall average / Standard deviation | 45 / 3 |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance | Tarkett Value | Norm |
|---|-------------------------|--------------------------|
| Reaction to fire | Cfl-s1 | EN 14342 - Table 1 |
| Formaldehyde emission | E1 | EN 14342 |
| Brinell hardness (average value) | 3.7 | (BHN) EN 1534 |
| Thermal insulation value : board only (RT m2 K/W) | 0.065 | EN ISO 10456:2007 |
| Thermal conductivity (W/m K) | 0.17 | EN 12664 / EN 14342:2013 |
| Slip Resistance (EN 16165 Annex C) | Low risk of slip | BS 7976-2 |
| Construction | Plywood Support 2-layer | |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

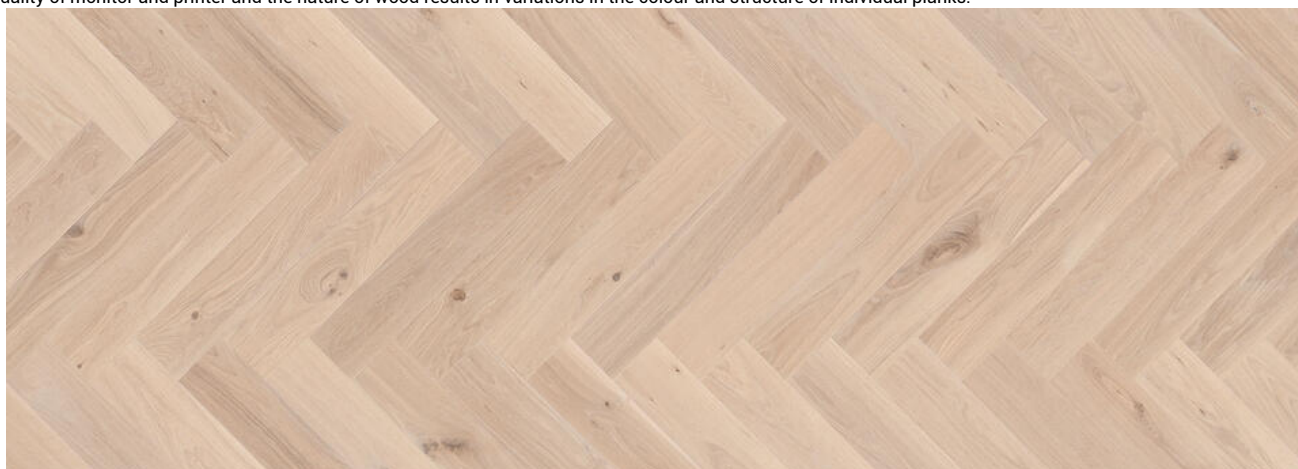

Segno - OAK BLONDE (Herringbone)

Datasheet


| Product Information | Tarkett Value |
|--|---------------------------------|
| Material code | 41020033 |
| Format | Plank 600x120mm Left |
| Pattern | (Herringbone) |
| Surface treatment | Proteco Hardwax Oil |
| Surface effect | Brushed |
| Bevelled edges | 4-side minibevel |
| Wear layer thickness | 3,5 mm |
| Total thickness | 11 mm |
| Items per box | 32 |
| Surface per box | 2,304 m ² |
| Surface per pallet | 69,12 m ² |
| Net weight | 7,16 kg |
| Character | Lively |
| Latin Name | Quercus Robur & Quercus Petraea |
| Declaration of Performance # | 0020-0144 |
| LRV - overall average / Standard deviation | 38 / 2 |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance | Tarkett Value | Norm |
|---|-------------------------|--------------------------|
| Reaction to fire | Cfl-s1 | EN 14342 - Table 1 |
| Formaldehyde emission | E1 | EN 14342 |
| Brinell hardness (average value) | 3.7 | (BHN) EN 1534 |
| Thermal insulation value : board only (RT m2 K/W) | 0.065 | EN ISO 10456:2007 |
| Thermal conductivity (W/m K) | 0.17 | EN 12664 / EN 14342:2013 |
| Slip Resistance (EN 16165 Annex C) | Low risk of slip | BS 7976-2 |
| Construction | Plywood Support 2-layer | |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

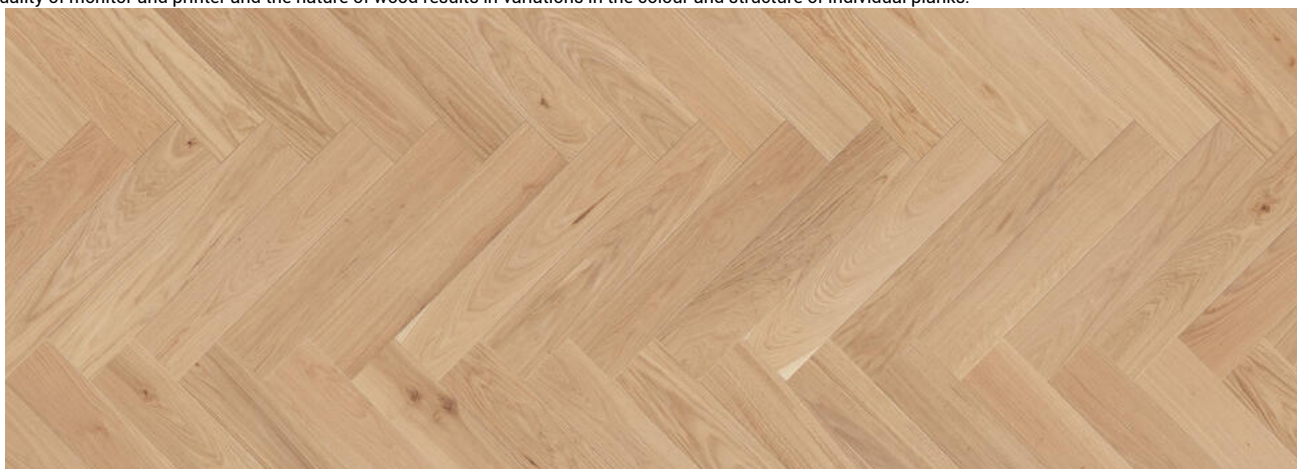

Segno - OAK BLONDE (Herringbone)

Datasheet


| Product Information | Tarkett Value |
|--|---------------------------------|
| Material code | 41020034 |
| Format | Plank 600x120mm Right |
| Pattern | (Herringbone) |
| Surface treatment | Proteco Hardwax Oil |
| Surface effect | Brushed |
| Bevelled edges | 4-side minibevel |
| Wear layer thickness | 3,5 mm |
| Total thickness | 11 mm |
| Items per box | 32 |
| Surface per box | 2,304 m ² |
| Surface per pallet | 69,12 m ² |
| Net weight | 7,16 kg |
| Character | Lively |
| Latin Name | Quercus Robur & Quercus Petraea |
| Declaration of Performance # | 0020-0144 |
| LRV - overall average / Standard deviation | 38 / 2 |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance | Tarkett Value | Norm |
|---|-------------------------|--------------------------|
| Reaction to fire | Cfl-s1 | EN 14342 - Table 1 |
| Formaldehyde emission | E1 | EN 14342 |
| Brinell hardness (average value) | 3.7 | (BHN) EN 1534 |
| Thermal insulation value : board only (RT m2 K/W) | 0.065 | EN ISO 10456:2007 |
| Thermal conductivity (W/m K) | 0.17 | EN 12664 / EN 14342:2013 |
| Slip Resistance (EN 16165 Annex C) | Low risk of slip | BS 7976-2 |
| Construction | Plywood Support 2-layer | |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

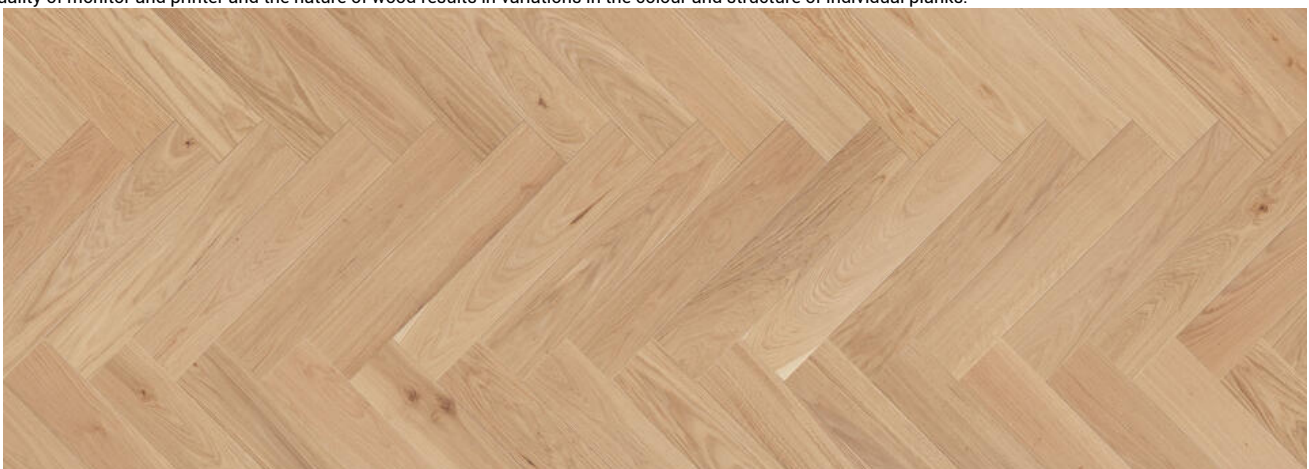

Segno - OAK (Herringbone)

Datasheet

| Product Information | Tarkett Value |
|--|---------------------------------|
| Material code | 41020035 |
| Format | Plank 600x120mm Left |
| Pattern | (Herringbone) |
| Surface treatment | Proteco Hardwax Oil |
| Surface effect | Brushed |
| Bevelled edges | 4-side minibevel |
| Wear layer thickness | 3,5 mm |
| Total thickness | 11 mm |
| Items per box | 32 |
| Surface per box | 2,304 m ² |
| Surface per pallet | 69,12 m ² |
| Net weight | 7,16 kg |
| Character | Lively |
| Latin Name | Quercus Robur & Quercus Petraea |
| Declaration of Performance # | 0020-0144 |
| LRV - overall average / Standard deviation | 33 / 2 |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance | Tarkett Value | Norm |
|---|-------------------------|--------------------------|
| Reaction to fire | Cfl-s1 | EN 14342 - Table 1 |
| Formaldehyde emission | E1 | EN 14342 |
| Brinell hardness (average value) | 3.7 | (BHN) EN 1534 |
| Thermal insulation value : board only (RT m2 K/W) | 0.065 | EN ISO 10456:2007 |
| Thermal conductivity (W/m K) | 0.17 | EN 12664 / EN 14342:2013 |
| Slip Resistance (EN 16165 Annex C) | Low risk of slip | BS 7976-2 |
| Construction | Plywood Support 2-layer | |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Segno - OAK (Herringbone)

Datasheet

| Product Information | Tarkett Value |
|--|---------------------------------|
| Material code | 41020036 |
| Format | Plank 600x120mm Right |
| Pattern | (Herringbone) |
| Surface treatment | Proteco Hardwax Oil |
| Surface effect | Brushed |
| Bevelled edges | 4-side minibevel |
| Wear layer thickness | 3,5 mm |
| Total thickness | 11 mm |
| Items per box | 32 |
| Surface per box | 2,304 m ² |
| Surface per pallet | 69,12 m ² |
| Net weight | 7,16 kg |
| Character | Lively |
| Latin Name | Quercus Robur & Quercus Petraea |
| Declaration of Performance # | 0020-0144 |
| LRV - overall average / Standard deviation | 33 / 2 |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance | Tarkett Value | Norm |
|---|-------------------------|--------------------------|
| Reaction to fire | Cfl-s1 | EN 14342 - Table 1 |
| Formaldehyde emission | E1 | EN 14342 |
| Brinell hardness (average value) | 3.7 | (BHN) EN 1534 |
| Thermal insulation value : board only (RT m2 K/W) | 0.065 | EN ISO 10456:2007 |
| Thermal conductivity (W/m K) | 0.17 | EN 12664 / EN 14342:2013 |
| Slip Resistance (EN 16165 Annex C) | Low risk of slip | BS 7976-2 |
| Construction | Plywood Support 2-layer | |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Segno - OAK OLD GREY (Herringbone)

Datasheet


| Product Information | Tarkett Value |
|--|---------------------------------|
| Material code | 41020037 |
| Format | Plank 600x120mm Left |
| Pattern | (Herringbone) |
| Surface treatment | Proteco Hardwax Oil |
| Surface effect | Brushed |
| Bevelled edges | 4-side minibevel |
| Wear layer thickness | 3,5 mm |
| Total thickness | 11 mm |
| Items per box | 32 |
| Surface per box | 2,304 m ² |
| Surface per pallet | 69,12 m ² |
| Net weight | 7,16 kg |
| Character | Lively |
| Latin Name | Quercus Robur & Quercus Petraea |
| Declaration of Performance # | 0020-0144 |
| LRV - overall average / Standard deviation | 25 / 1 |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance | Tarkett Value | Norm |
|---|-------------------------|--------------------------|
| Reaction to fire | Cfl-s1 | EN 14342 - Table 1 |
| Formaldehyde emission | E1 | EN 14342 |
| Brinell hardness (average value) | 3.7 | (BHN) EN 1534 |
| Thermal insulation value : board only (RT m2 K/W) | 0.065 | EN ISO 10456:2007 |
| Thermal conductivity (W/m K) | 0.17 | EN 12664 / EN 14342:2013 |
| Slip Resistance (EN 16165 Annex C) | Low risk of slip | BS 7976-2 |
| Construction | Plywood Support 2-layer | |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

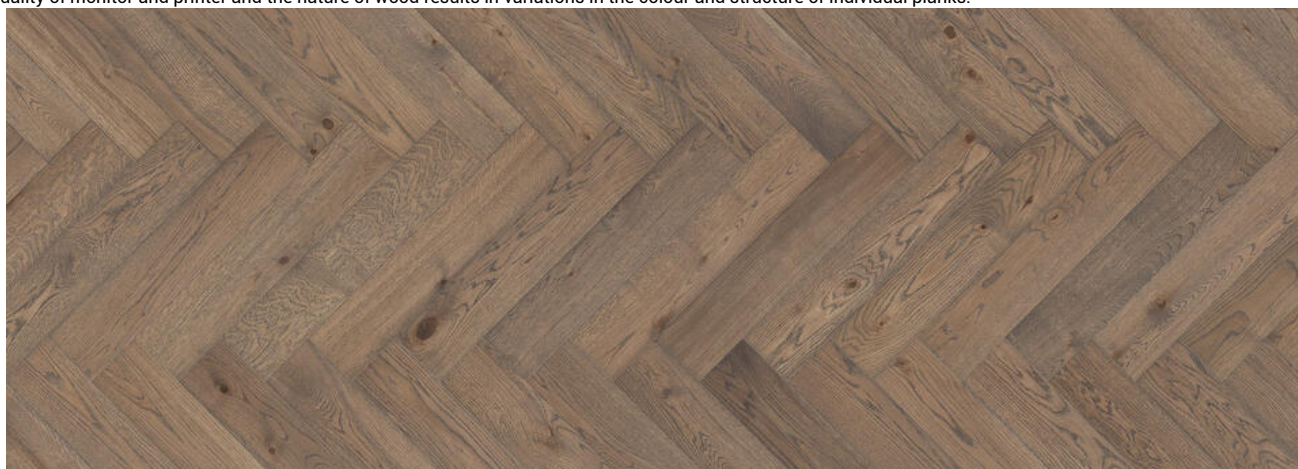

Segno - OAK OLD GREY (Herringbone)

Datasheet


| Product Information | Tarkett Value |
|--|---------------------------------|
| Material code | 41020038 |
| Format | Plank 600x120mm Right |
| Pattern | (Herringbone) |
| Surface treatment | Proteco Hardwax Oil |
| Surface effect | Brushed |
| Bevelled edges | 4-side minibevel |
| Wear layer thickness | 3,5 mm |
| Total thickness | 11 mm |
| Items per box | 32 |
| Surface per box | 2,304 m ² |
| Surface per pallet | 69,12 m ² |
| Net weight | 7,16 kg |
| Character | Lively |
| Latin Name | Quercus Robur & Quercus Petraea |
| Declaration of Performance # | 0020-0144 |
| LRV - overall average / Standard deviation | 25 / 1 |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance | Tarkett Value | Norm |
|---|-------------------------|--------------------------|
| Reaction to fire | Cfl-s1 | EN 14342 - Table 1 |
| Formaldehyde emission | E1 | EN 14342 |
| Brinell hardness (average value) | 3.7 | (BHN) EN 1534 |
| Thermal insulation value : board only (RT m2 K/W) | 0.065 | EN ISO 10456:2007 |
| Thermal conductivity (W/m K) | 0.17 | EN 12664 / EN 14342:2013 |
| Slip Resistance (EN 16165 Annex C) | Low risk of slip | BS 7976-2 |
| Construction | Plywood Support 2-layer | |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

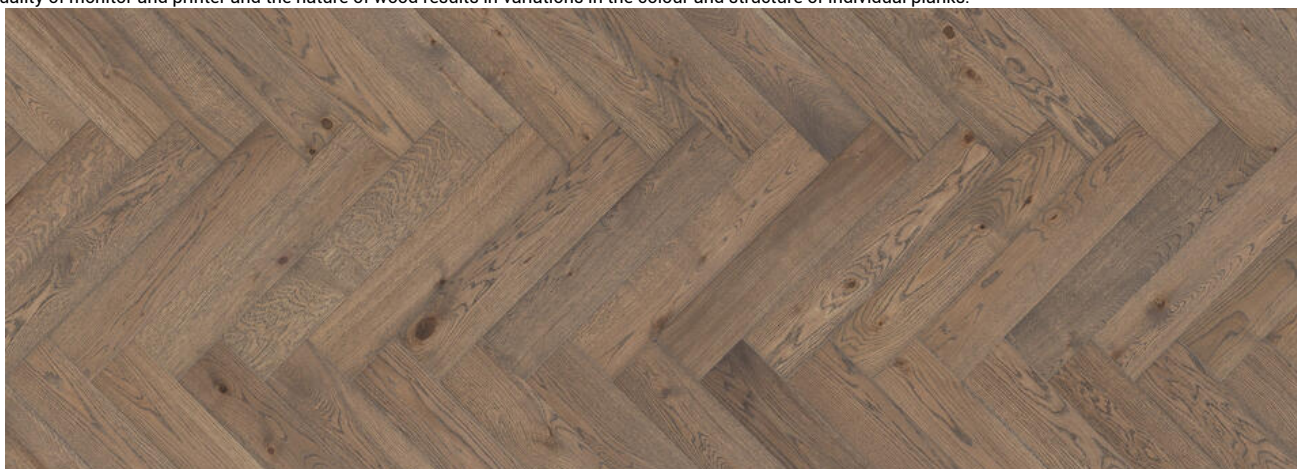

Segno - OAK OLD BROWN (Herringbone)

Datasheet

| Product Information | Tarkett Value |
|--|---------------------------------|
| Material code | 41020039 |
| Format | Plank 600x120mm Left |
| Pattern | (Herringbone) |
| Surface treatment | Proteco Hardwax Oil |
| Surface effect | Brushed |
| Bevelled edges | 4-side minibevel |
| Wear layer thickness | 3,5 mm |
| Total thickness | 11 mm |
| Items per box | 32 |
| Surface per box | 2,304 m ² |
| Surface per pallet | 69,12 m ² |
| Net weight | 7,16 kg |
| Character | Lively |
| Latin Name | Quercus Robur & Quercus Petraea |
| Declaration of Performance # | 0020-0144 |
| LRV - overall average / Standard deviation | 12 / 1 |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance | Tarkett Value | Norm |
|---|-------------------------|--------------------------|
| Reaction to fire | Cfl-s1 | EN 14342 - Table 1 |
| Formaldehyde emission | E1 | EN 14342 |
| Brinell hardness (average value) | 3.7 | (BHN) EN 1534 |
| Thermal insulation value : board only (RT m2 K/W) | 0.065 | EN ISO 10456:2007 |
| Thermal conductivity (W/m K) | 0.17 | EN 12664 / EN 14342:2013 |
| Slip Resistance (EN 16165 Annex C) | Low risk of slip | BS 7976-2 |
| Construction | Plywood Support 2-layer | |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Segno - OAK OLD BROWN (Herringbone)

Datasheet

| Product Information | Tarkett Value |
|--|---------------------------------|
| Material code | 41020040 |
| Format | Plank 600x120mm Right |
| Pattern | (Herringbone) |
| Surface treatment | Proteco Hardwax Oil |
| Surface effect | Brushed |
| Bevelled edges | 4-side minibevel |
| Wear layer thickness | 3,5 mm |
| Total thickness | 11 mm |
| Items per box | 32 |
| Surface per box | 2,304 m ² |
| Surface per pallet | 69,12 m ² |
| Net weight | 7,16 kg |
| Character | Lively |
| Latin Name | Quercus Robur & Quercus Petraea |
| Declaration of Performance # | 0020-0144 |
| LRV - overall average / Standard deviation | 12 / 1 |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance | Tarkett Value | Norm |
|---|-------------------------|--------------------------|
| Reaction to fire | Cfl-s1 | EN 14342 - Table 1 |
| Formaldehyde emission | E1 | EN 14342 |
| Brinell hardness (average value) | 3.7 | (BHN) EN 1534 |
| Thermal insulation value : board only (RT m2 K/W) | 0.065 | EN ISO 10456:2007 |
| Thermal conductivity (W/m K) | 0.17 | EN 12664 / EN 14342:2013 |
| Slip Resistance (EN 16165 Annex C) | Low risk of slip | BS 7976-2 |
| Construction | Plywood Support 2-layer | |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

