


Type of floor covering:
PVC sports floor covering
Heterogeneous indoor floorcoverings
CLASSIFICATION EN 14904

OMNISPORTS V35

- 1 Fiberglass
- 2 Calendered PVC sheet
- 3 Closedcell PVC foam backing
- 4 Wear-layer
- 5 Top Clean XP – Factory applied PU treatment

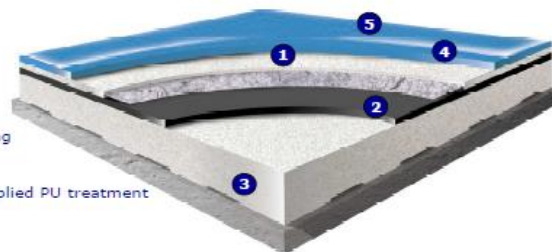

DoP № 0301-0044-DoP-2017-05		
PRODUCT CHARACTERISTICS	STANDARDS	OMNISPORTS V35
Warranty period, years	-	10
Total thickness, mm	EN 428	3,450
Wear layer thickness, mm	EN 429	0,650
Weight, kg/m ²	EN 430	3,160
Surface treatment-additional PU protection	-	Top Clean XP
Surface treatment-chemical/mechanical embossing	-	normal
Hygiene	-	Does not contribute to infection spreading
TVOC after 28 days	ISO 16000	< 100 µg/m ³
Phthalate-free technology	-	YES
Reduction of Impact Sound Insulation	ISO 140-8 / ISO 717-2	> 18
MARKETING CHARACTERISTICS	STANDARDS	OMNISPORTS V35
Hygienic attest	-	Pass
Roll length, m	EN 426	20,5
Roll width, m	EN 426	2
Back embossing	-	yes
TECHNICAL PERFORMANCES, STANDARDS	REQUIREMENTS, UNIT	VALUE
Vertical deformation, EN 14809	≤ 5,0 mm	0,06
Vertical ball rebound, EN 12235	≥ 90%	99
Friction EN 13036-4	80-110	90
Resistance to indentation, EN 1516	≤ 0,5 mm	0,04
Dimensional stability after exposure to heat, EN ISO 23999	≤ 0,4 %	≤ 0,4
Curling after exposure to heat, EN ISO 23999	≤ 8 mm	≤ 8
Light resistance, ISO 105-B02	≥ 6	≥ 6
Chemical resistance, EN ISO 26987	Resistant	Resistant
Specular gloss, EN ISO 2813	≤ 30 %	17
Resistance to impact, EN 1517	No damage	No damage
Resistance to wear, EN ISO 5470-1	≤ 1,0 g	0,12
Resistance to a rolling load, EN 1569	≤ 0,5 mm	0,30
	No damage	No damage
Possibility to install in rooms with floor heating	27 °C	27 °C
Fire resistance, EN 13501-1	class	CflS1
Form of delivery, ISO 24341 – EN 426	-	20,5 running meters x 200 cm
Sheet (rolls)		
Colours		22
* glued on concrete and sub-floor construction		