

Technical Datasheet

Aluminium profiles for LVT General traffic transition strip for Click and Loose-Lay LVT

TRANSITION PROFILES

DESCRIPTION

Aluminium transition strip for use in general traffic areas for LVT Click & Loose-Lay.
To be screwed.

Key features:

- Elegant finish with smooth surface and no visual screws.
- Easy to clean and maintain.
- Available in 2 elegant colors.

Compatible flooring:

- LVT Click
- LVT Loose-Lay

Main segments of application:



TECHNICAL INFORMATION

Product

Size (mm) 2700 length x 24 width
x 6 height

Unit weight (g) 203


Packaging

Pieces per box 10 (27lm)

Box size (cm) 2.75 x 0.065 x 0.095

Box weight (kg) 5.05

Min. order 1 box

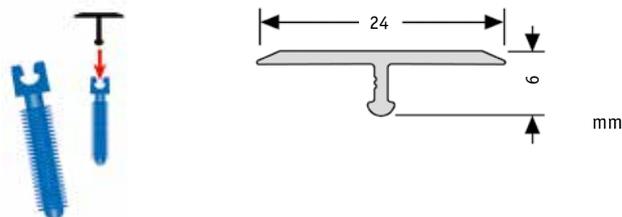

INSTALLATION

- Full kit including top profiles and dowls (14 dowls in a bag)
- Surface must be flat, clean, sound, dry, solid, hard, smooth, moderate absorbent, grease free and not exposed to high humidity.
- Use a primer before installation.
- Keep 8.25mm on both flooring edges.
- Screw the transition strip.

CLEANING & MAINTENANCE

- For daily cleaning, use standard neutral detergents (ph 7) and damp mopping.
- Use a brush to clean the grooves.
- Lightly burnish the profile with steel wool to help maintain its appearance.

ARTICLE CODE

		SAP Code	EAN Code
	Silver NCS: S 2500-N	1451 021	3423128465600
	Stainless steel NCS: S 6005-Y20R	1451 022	3423128465617