
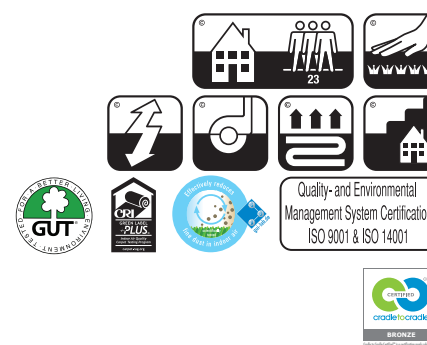


Chinchilla

Specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 5/16 "					
Aspect	ISO 2424		Cut pile					
Dye method			Piece dyed continuous					
Width		cm	400 - 500		ft	13,1 - 16,6		
Primary backing	ISO 2424		Polypropylene woven + fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6.6					
Total thickness	ISO 1765	mm	11.1		inch	0.4		
Effective pile thickness	ISO 1766	mm	8.0		inch	0.31		
Total mass	ISO 8543	g/m²	2400		oz/yd²	70.8		
Total pile mass	ISO 2424	g/m²	1290		oz/yd²	38.1		
Effective pile mass	ISO 8543	g/m²	1110		oz/yd²	32.8		
Pile density	ISO 8543	g/cm³	0.139		lb/in³	0.0050		
Number of tufts	ISO 1763	/dm²	239		/yd²	19983		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		23 Domestic - heavy use					
Luxury rating	EN 1307		LC 5					
Impact sound reduction ΔL _w	ISO 10140	dB	-					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	-					
Thermal resistance	ISO 8302	m².K/W	0.168					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		0DDEB119					

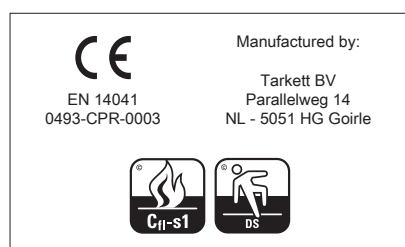

Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190514