

Technical Datasheet

Decorative set-in skirtings Preformed linoleum skirting - SIS

SKIRTINGS & COVING

DESCRIPTION

Flexible set-in skirting made of linoleum, reinforced with polymere on backside.

Key features:

- Skirtings ready for use, saving time and money.
- Neat and tidy finish.
- Hot welded to the floor and all covering for perfect hygiene and easy cleaning and maintenance.
- Available in 3 formats: 60/80/100.

Compatible flooring:

- Linoleum (compact and acoustic*)

Main segments of application:



TECHNICAL INFORMATION

Product

Size (mm) 2400 length x 100 width
x 2/2.5/3.8 thickness x 60 height
2400 length x 100 width
x 2/2.5/3.8 thickness x 80 height
2400 length x 100 width
x 2/2.5/3.8 thickness x 100 height
Also available on 200mm, onto the floor.


Unit weight (g) 60mm 780

Packaging

Pieces per box 10 (24lm)
Min. order 2 boxes (96lm)

INSTALLATION

- To be glued to the wall using an acrylic contact adhesive: spread adhesive within the pre-marked sections of the subsurface with an appropriate brush.
- Spread adhesive on the backside of the corner.
- Hot weld to the floor covering.

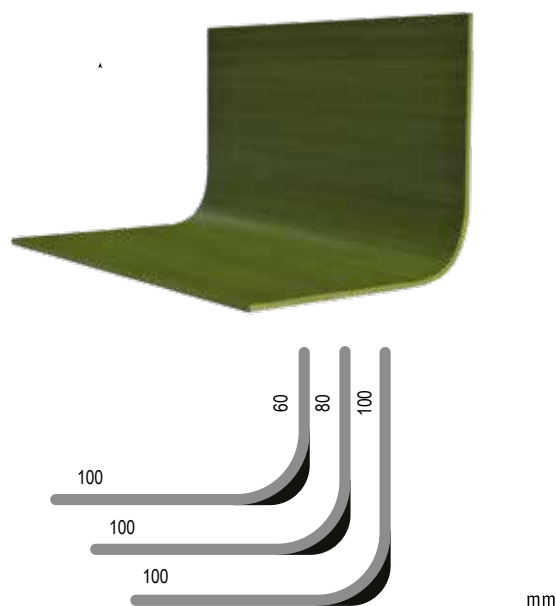

ARTICLE CODE

	Compact 2.0mm	
	SAP Code	EAN Code
60mm	1748 ---	***
80mm	1747 ---	***
100mm	1746 ---	***
	Compact 2.5mm	
	SAP Code	EAN Code
60mm	1745 ---	***
80mm	1744 ---	***
100mm	1743 ---	***
	Acoustic 3.8mm	
	SAP Code	EAN Code
60mm	1742 ---	***
80mm	1741 ---	***
100mm	1719 ---	***

* Compact: 2 and 2.5mm / Acoustic: 3.8mm

** Available on request with all colours.

CLEANING & MAINTENANCE

For daily cleaning, use standard neutral detergents (ph 7) and a dedicated tool specific for corner cleaning.

