

Technical Datasheet

Decorative set-on skirtings Ventilated skirting - VS100

SKIRTINGS & COVING

DESCRIPTION

Ventilated skirting made of wood to be painted.
To be used in combination with loose-laid floorings or with floor coverings on Tarkolay.


Key features:

- Creation of genuine natural and drying ventilation thanks to its vents.
- Prevention of moisture and dampness.
- Skirting to be painted for customization.

Compatible flooring:

- HE vinyl rolls loose-laid.
- Homogeneous and heterogeneous vinyls (rolls) on Tarkolay underlay solution.

Main segments of application:

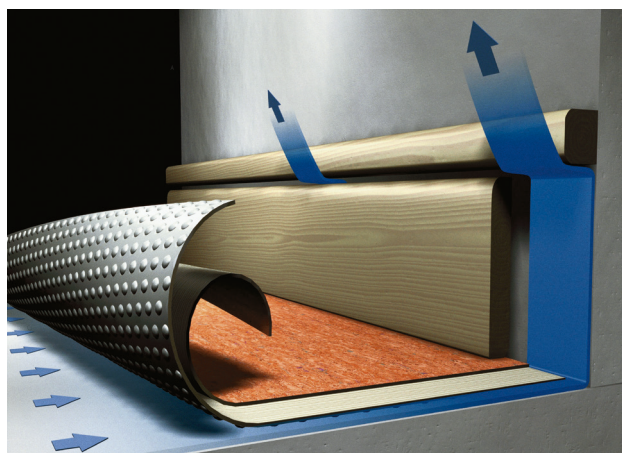


TECHNICAL INFORMATION

Product

Size (mm)	13 thickness x 3000 length
Unit weight (g)	281

Packaging

Pieces per box	1 (3lm)
Min. order	1 box



mm

INSTALLATION

- Stuck on the wall with mastic adhesive.
- Do not install the floor covering over the wall to permit ventilation.

ARTICLE CODE

	SAP Code	EAN Code
Wood (Unfinished, to be painted)	1252 030	7393799119583

CLEANING & MAINTENANCE

For daily cleaning, use standard neutral detergents (ph 7) and a dedicated tool specific for skirting cleaning.

