

# Welding rods Hot welding for non-PVC flooring

## WELDING RODS

### DESCRIPTION

Welding rods to join floorcovering for perfect watertightness, specially developed for non-PVC floorings.


#### Key features:

- Hot welding for perfect watertightness and hygiene.
- Non-PVC coordinated welding rod (unicolor).
- Easy to clean and maintain.

#### Compatible flooring:

- Homogeneous non-PVC thermoplastic flooring: iQ One

#### Main segments of application:

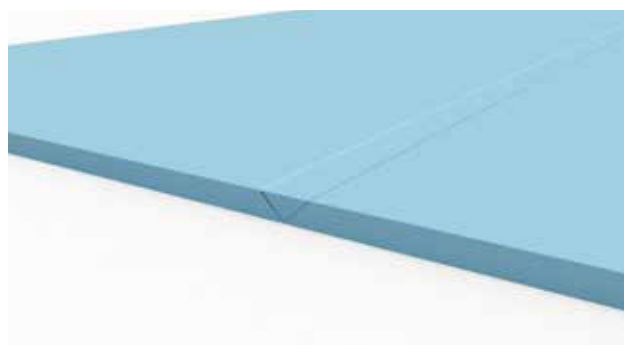

### TECHNICAL INFORMATION

#### Product

Size (mm)	1 bobbin of 50lm (diameter 4mm)
Bobbin weight (kg)	1.0

#### Packaging

Min. order	1 bobbin
------------	----------

### ARTICLE CODE

iQ One	21201 ---
--------	-----------

### INSTALLATION

- Floorcovering must be welded 24h after the installation.
- Groove the floorcovering to create a gap between both products with 2/3 thickness for compact.
- Weld the product with an average speed of 2lm/min and a 350-400°C temperature.
- Trim the overflow of the joint material first with a «Quarter moon knife»;
- Trim the joint material with the «Mozart» a second time

### CLEANING & MAINTENANCE

Cf. flooring cleaning instructions.