

Technical Datasheet

Welding rods Hot welding for vinyl sports floorings

WELDING RODS

DESCRIPTION

4 mm and 5 mm welding rods to join floorcovering for perfect hygiene and seam strength.


Key features:

- Hot welding for perfect hygiene and resistance.
- Superior seam strength.
- Available in unicolour versions (depending on ranges).
- Designed to match perfectly the flooring colour.
- Easy to clean and maintain.

Compatible flooring:

- Omnisports Speed/Compact (diameter 4mm)
- Omnisports Training/Reference Multi-use /Active/Excel / Pureplay (diameter 5mm)

Main segments of application:

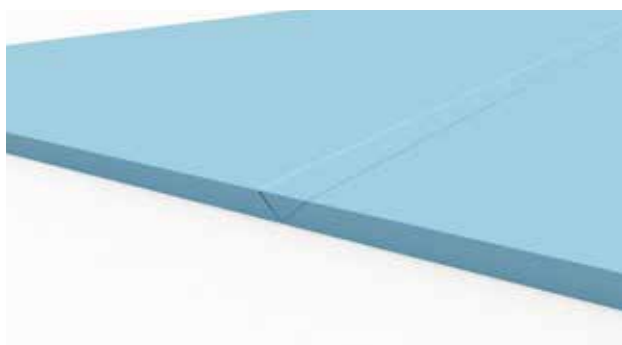

TECHNICAL INFORMATION

Product

Size (mm)	1 bobbin of 40lm Diameters: 4mm and 5 mm
Bobbin weight (kg)	1.1

Packaging

Min. order	1 bobbin
------------	----------

ARTICLE CODE

Available for every HO and HE vinyl floorings. Please refer to product sample book or to <http://professionals.tarkett.com> to find the right reference.

4 mm for Omnisports Compact / Speed	1287---/1291---/1292---
-------------------------------------	-------------------------

5 mm for Omnisports Training / Reference Multi-use / Active / Excel / PurePlay	1285 ---
---	----------

INSTALLATION

- Floorcovering must be welded 24h after the installation.
- Groove the floorcovering to create a gap between both products till foam.
- Weld the product with an average speed of 2lm/min and a 350-400°C temperature.
- Trim the overflow of the joint material first with a «Quarter moon knife»
- Trim the joint material with the «Mozart» a second time

CLEANING & MAINTENANCE

Cf. flooring cleaning instructions.