


Palatino .

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Piece dyed continuous					
Width		cm	400		ft	13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven - Sandwich Backing					
Pile fibre composition	ISO 2424		BCF Polyamide 6.6					
Total thickness	ISO 1765	mm	7.5		inch	0.3		
Effective pile thickness	ISO 1766	mm	5.0		inch	0.20		
Total mass	ISO 8543	g/m²	2250		oz/yd²	66.4		
Total pile mass	ISO 2424	g/m²	1100		oz/yd²	32.5		
Effective pile mass	ISO 8543	g/m²	845		oz/yd²	24.9		
Pile density	ISO 8543	g/cm³	0.169		lb/in³	0.0061		
Number of tufts	ISO 1763	/dm²	1500		/yd²	125415		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 4					
Impact sound reduction ΔL _w	ISO 10140	dB	26					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	0.03	0.05	0.11	0.29	0.48	0.56
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	≤ 0,17					
Flammability	EN 13501-1		Bfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

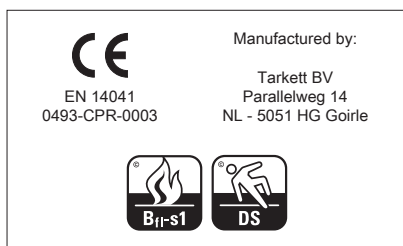

Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognised trade standards. An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, visit professionals.tarkett.com

EN-20180509