
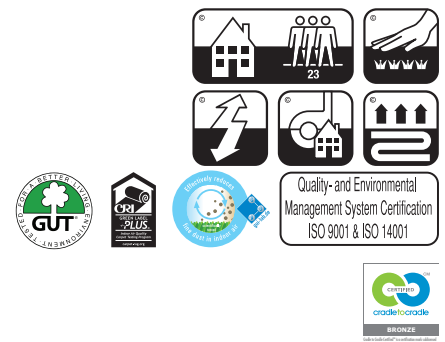


Palesse

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 "						
Aspect	ISO 2424	Cut pile						
Dye method		Piece dyed						
Width	cm	400 - 500	ft	13,1 - 16,6				
Primary backing	ISO 2424	Polypropylene woven + fleece						
Secondary backing	ISO 2424	Polypropylene woven						
Pile fibre composition	ISO 2424	Polyamide 6.6 spun yarn						
Total thickness	ISO 1765	mm	9.3	inch	0.4			
Effective pile thickness	ISO 1766	mm	7.2	inch	0.28			
Total mass	ISO 8543	g/m ²	2160	oz/yd ²	63.8			
Total pile mass	ISO 2424	g/m ²	1135	oz/yd ²	33.5			
Effective pile mass	ISO 8543	g/m ²	945	oz/yd ²	27.9			
Pile density	ISO 8543	g/cm ³	0.131	lb/in ³	0.0047			
Number of tufts	ISO 1763	/dm ²	2120	/yd ²	177253			
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307	22 Domestic - moderate use						
Luxury rating	EN 1307	LC 4						
Impact sound reduction ΔL_w	ISO 10140	dB	28					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α_s	-	-	-	-	-	-
Noise reduction	ISO 354	α_w	-					
Thermal resistance	ISO 8302	m ² .K/W	0.170					
Flammability	EN 13501-1	Cfl - s1 (glued tested)						
Prodis - GUT	www.pro-dis.info	9BFC44AD						

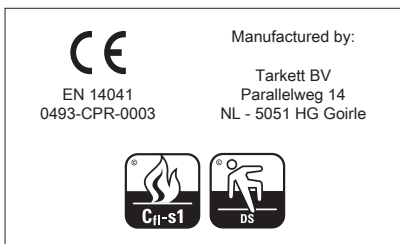

Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515