

Technical Datasheet

Ramp for LVT Aluminium ramp profile for LVT Click & Loose-Lay

TRANSITION PROFILES

DESCRIPTION

Aluminium ramp profile used in very heavy traffic areas for LVT Click & Loose-Lay. To be screwed.

Key features:

- Suitable for immediate use in high-traffic areas.
- Ribbed surface for slip-resistance.
- Long ramp for easy rolling transfers.
- Available in 2 elegant colors.
- Easy to install solution (one piece).

Compatible flooring:

- LVT Click
- LVT Loose-Lay

Main segments of application:



TECHNICAL INFORMATION

Product

Size (mm) 2700 length x 38 width x 5 height
2700 length x 38 width x 7 height

Unit weight (g) 594


Packaging

Pieces per box 10 (27lm)

Box size (cm) 2.75 x 0.065 x 0.145

Box weight (kg) 12.88

Min. order 1 box

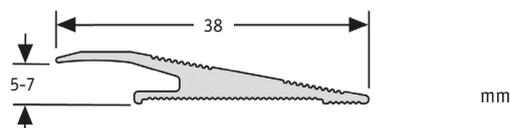

INSTALLATION

- Full kit including : Ramp profiles + Screws / Dowls diameter 5 mm - One hole every 150 mm (18 screws and dowls per piece in a bag).
- Surface must be flat, clean, sound, dry, solid, hard, smooth, moderate absorbent, grease free and not exposed to high humidity.
- Use a primer before installation.
- Screw the transition strip.

CLEANING & MAINTENANCE

- For daily cleaning, use standard neutral detergents (ph 7) and damp mopping.
- Use a brush to clean the grooves.
- Lightly burnish the profile with steel wool to help maintain its appearance.

ARTICLE CODE

		SAP Code	EAN Code
	Silver NCS: S 2500-N	1454 011	3423128465624
	Stainless steel NCS: S 6005-Y20R	1454 012	3423128465631