

Technical Datasheet

Set on skirtings Renovation skirting

SKIRTINGS & COVING

DESCRIPTION

High density polystyrene foam 100% recyclable with a protective varnish skirting to be placed over existing skirting in renovation projects avoiding additional handling costs. High density polystyrene foam 100% recyclable with a protective varnish.

Key features:

- Elegant visual finish
- Ideal for renovation projects
- Reduced installation time

Compatible flooring:

- Heterogeneous and homogeneous vinyl in rolls
- Linoleum
- LVT

Main segments of application:



TECHNICAL INFORMATION

Product

Size (mm) 2000 length x 22 width x 110 height

Unit weight (g) 660

Packaging

Pieces per box 18 pieces (36lm)

Box size (cm) 203 x 21 x 13


Box weight (kg) 13

Pallet size (m) 2.2 x 1.2 x 0.8

Pallet weight (kg) 440

Boxes par pallet 32

Min. order 1 box

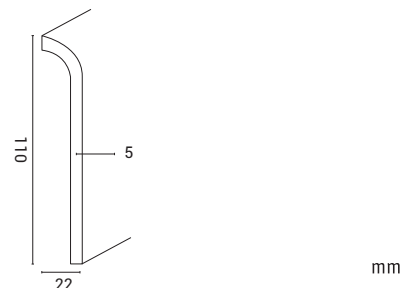

mm

CLEANING & MAINTENANCE

For daily cleaning: use standard neutral detergents (ph 7) and damp mopping.

INSTALLATION

- Before gluing, check that the surface is clean and free of grease, sound and dry.
- Spread the adhesive on the backside of the skirting.
- Use a Polymer Adhesive or Acrylic glue-filler with help of a caulking gun.
- Depending on the substrate, use a primer before installation.

ARTICLE CODE

	SAP Code	EAN Code
White RAL: 9003 NCS: S 0500 N	1411 301	3423128632453

