

## Technical Datasheet

# Stair nosings for LVT Stairnose high traffic

## STAIRS

### DESCRIPTION

Aluminium stairnose for LVT used in high traffic. To be screwed.


#### Key features:

- Very resistant to wear and high traffic.
- Ribbed surface for slip-resistance.
- Elegant finish.

#### Compatible flooring:

- Typically used with resilient floorcoverings.
- Heterogeneous and homogeneous vinyls in rolls.

#### Main segments of application:

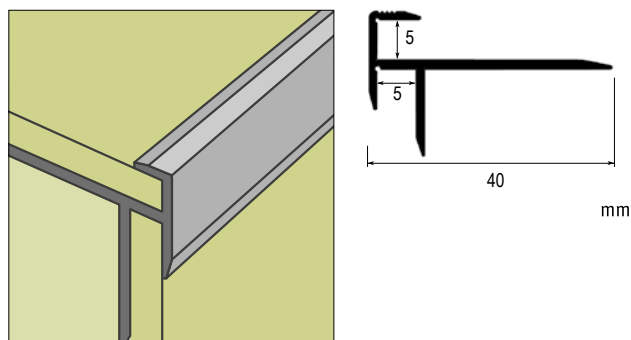

### TECHNICAL INFORMATION

#### Product

Size (mm)	40 width x 5 inside thickness x 2500 length
Unit weight (g)	773



#### Packaging

Pieces per box	10 (25lm)
Min. order	1 box

### INSTALLATION

- Full kit including stairnose profile, screws and dowls.
- Use a primer before installation.
- To be screwed onto stairnose.

### ARTICLE CODE

		SAP Code	EAN Code
	Silver NCS: S 2500-N	1434 021	3423128465662
	Stainless steel NCS: S 6005-Y20R	1434 022	3423128465679

### CLEANING & MAINTENANCE

- For daily cleaning, use standard neutral detergents (ph7) or damp mopping.
- Use a brush to clean the grooves.
- May be lightly burnished with steel wool to help maintain its appearance.