

Technical Datasheet

Stair nosings for LVT Stairnose very high traffic

STAIRS

DESCRIPTION

Aluminium stairnose for LVT used in very high traffic. To be screwed.

Key features:

- Very resistant to wear and high traffic.
- Ribbed surface for slip-resistance.
- Elegant finish.

Compatible flooring:

- LVT Click
- LVT Loose-lay

Main segments of application:




TECHNICAL INFORMATION

Product

Size (mm)	30 height x 38 width x 5/5.5 thickness x 2500 length
Unit weight (g)	370

Packaging

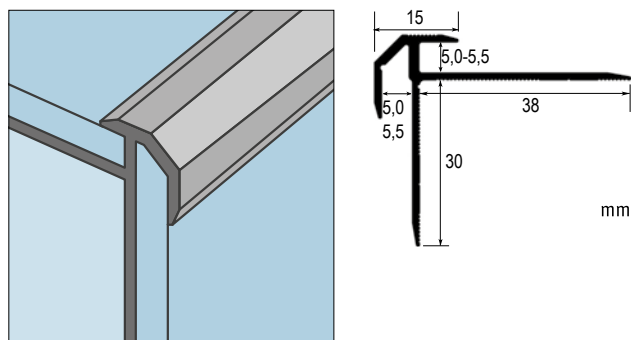

Pieces per box	5 (12,5lm)
Box Size (m)	2.75 x 0.14 x 0.06
Box weight (kg)	3
Min. order	1 box



INSTALLATION

- Full kit including stairnose profile, screws and dowels.
- Use a primer before installation.
- To be screwed onto stairnose.

ARTICLE CODE

		SAP Code	EAN Code
	Silver NCS: S 2500-N	1434 011	3423128465648
	Stainless steel NCS: S 6005-Y20R	1434 012	3423128465655

CLEANING & MAINTENANCE

- For daily cleaning, use standard neutral detergents (ph7) or damp mopping.
- Use a brush to clean the grooves.
- May be lightly burnished with steel wool to help maintain its appearance.