

Technical Datasheet

Stairs nosings Sharp-angled stairnose NM45

STAIRS

DESCRIPTION

Flexible PVC stairnose with ribs. To be fixed with adhesive.

Key features:

- Designed for slight round-shaped stair noses in housing, with bending radius 2R.
- Easy to install thanks to its flexible structure.
- Ribbed surface for slip-resistance.
- Easy to clean and maintain.

Compatible flooring:

- Typically used with resilient floorcoverings.
- Heterogeneous and homogeneous vinyls in rolls.
- Linoleum.

Main segments of application:



TECHNICAL INFORMATION

Product

Size (mm) 65 height x 50 width x 3.0 thickness x 3000 length

Unit weight (g) 419

Packaging

Pieces per box 12 (36lm)

Box size (m) 3.10 x 0.14 x 0.14



Pallet size (m) 3.0 x 1.0 x 0.8

Boxes per pallet 25

Min. order 1 box

INSTALLATION

- Surface must be flat, clean, sound, dry, solid, hard, smooth, moderate absorbent and not exposed to high humidity. Use contact adhesive only.
- Only ribbed part is fully adhered to substrate. The lower lip is loose to prevent the profile to move and to resist better at the pressure.
- Respect shapes and angles of the stairs.
- Always start from the bottom of the staircase.
- Trace a straight line on the flat part of the step to get a perfect alignment.
- Glue the flat part of the step first following the premarked line and adjust the lower lip.
- When installing the floor covering: «Break» it and force it into the inner angle of the step. Heat backside of the staircase to make it more flexible.
- DO NOT heat the surface to avoid gloss effect.

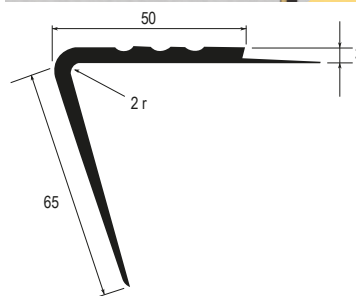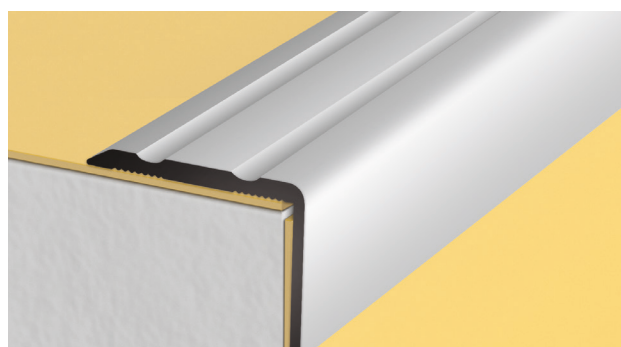




mm

CLEANING & MAINTENANCE

- For daily cleaning, use standard neutral detergents (ph7) or damp mopping.
- Use a brush to clean the grooves.

ARTICLE CODE

		SAP Code	EAN Code
	Black RAL: 9004 NCS: S 8500 N	1403 004	3423128397291
	Medium grey RAL: 7012 NCS: S 6500 N	1403 005	3423128397307
	Light grey RAL: 7040 NCS: S 2500 N	1403 006	3423128397314

 **Tarkett**