

Technical Datasheet

Stop profile for LVT Bendable stop profile for LVT Click and Loose-Lay

TRANSITION PROFILES

DESCRIPTION

Aluminium bendable stop profile for high-traffic areas for LVT Click, LVT Loose-Lay and Carpet Tiles. Can be used close to carpet tiles. To be screwed.

Key features:

- Bendable profile with a 80cm radius.
- High resistance to wear and traffic.
- Ribbed surface for slip-resistance.
- Available in 2 elegant colors.

Compatible flooring:

- LVT Click
- LVT Loose-Lay
- Carpet tiles

Main segments of application:




TECHNICAL INFORMATION

Product

Size (mm)	2500 length x 30 width x 5 height inside x 8 height outside
Unit weight (g)	400

Packaging

Pieces per box	10 (25lm)
Box size (cm)	2.75 x 0.065 x 0.095
Box weight (kg)	9
Min. order	1 x 1.1 x 1.3 (40 cart.) 1 box

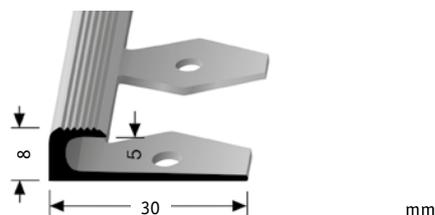

INSTALLATION

- Full kit including stop profiles, screws and dowls.
- Surface must be flat, clean, sound, dry, solid, hard, smooth, moderate absorbent, grease free and not exposed to high humidity.
- Use a primer before installation.
- Screw the transition strip.

CLEANING & MAINTENANCE

- For regular cleaning, use standard neutral detergents (ph 7) and damp mopping.
- Use a brush to clean the grooves.
- Lightly burnish the profile with steel wool to help maintain its appearance.

ARTICLE CODE

		SAP Code	EAN Code
	Silver NCS: S 2500-N	1456 011	3423128465686
	Stainless steel NCS: S 6005-Y20R	1456 012	3423128465703