


Torso (Marine)

Specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Piece dyed continuous					
Width		cm	400		ft	13.1		
Primary backing	ISO 2424		Polypropylene woven + fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	6.5		inch	0.3		
Effective pile thickness	ISO 1766	mm	4.0		inch	0.16		
Total mass	ISO 8543	g/m²	2070		oz/yd²	61.1		
Total pile mass	ISO 2424	g/m²	850		oz/yd²	25.1		
Effective pile mass	ISO 8543	g/m²	650		oz/yd²	19.2		
Pile density	ISO 8543	g/cm³	0.163		lb/in³	0.0059		
Number of tufts	ISO 1763	/dm²	1930		/yd²	161367		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	25					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	0.03	0.04	0.12	0.31	0.52	0.52
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.079					
Flammability	EN 13501-1							
Prodis - GUT	www.pro-dis.info		3FE91471					

Manufactured by:	
EN 14041	Tarkett BV Taxandriaweg 15 NL - 5142 PA Waalwijk

Product is also certified for:
Certificate of Fire Approval IMO Res. MSC.
307 (88) - (FTP Code), Annex 1, Part 2.
Suitable for restricted areas only (cabins and
corridors), not suitable for escape routes.

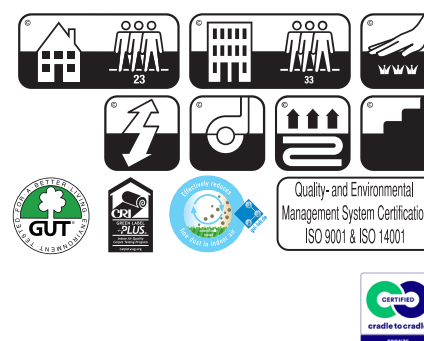

DESSO flooring products are to be installed in full accordance with Tarkett's installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. DESSO flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20240220