





Specification according to EN 1307


Type of manufacture	Tufted 1/10 "	ISO 2424
Aspect	Structured loop pile	ISO 2424
Dye method	Solution dyed	
Dimension	50 cm x 50 cm / 19,68" x 19,68" (20 tiles per box)	EN ISO 24342
Primary backing	Polyester fleece	ISO 2424
Secondary backing	DESSO EcoBase® * - Containing at least 75% C2C positively defined recycled content	ISO 2424
Pile fibre composition	BCF Polyamide 6 and ECONYL® (ECONYL® is made from 100% regenerated content) **	ISO 2424
Total thickness	6.5 mm 0.3 inch	ISO 1765
Effective pile thickness	2.8 mm 0.11 inch	ISO 1766
Total mass	4250 g/m ² 125.4 oz/yd ²	ISO 8543
Total pile mass	730 g/m ² 21.5 oz/yd ²	ISO 2424
Effective pile mass	415 g/m ² 12.2 oz/yd ²	ISO 8543
Pile density	0.148 g/cm ³ 0.0054 lb/in ³	ISO 8543
Number of tufts	1580 /dm ² 132104 /yd ²	ISO 1763
Stroll test	≤ 2,0 kV	ISO 6356
Vertical resistance	≤ 1 x 10 ⁹ Ohm	ISO 10965
Use classification	33 Commercial - heavy use	EN 1307
Dimensional stability	≤ 0,2 %	EN 986
Impact sound reduction ΔL _w	23 dB	ISO 10140
Noise reduction	0.15 α _w	ISO 354
Flammability	B _{fl} - s1 (loose laid tested)	EN 13501-1
Light Reflectance Value (LRV)	See right side page per colour	BS 8493
Colour Depth (L)	See right side page per colour	CIELAB

* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: www.tarkett.com



** ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: www.tarkett.com

With EcoBase™ backing




 EN 14041
 0493-CPR-0002

Manufactured by
 Tarkett BV
 PO Box 169
 NL-5240 AD
 Waalwijk




1052 L 61,52 / LRV 29,84
 2912 L 37,36 / LRV 9,73
 2915 L 46,75 / LRV 15,83




4301 L 28,10 / LRV 5,49
 5012 L 38,76 / LRV 10,52
 6218 L 51,64 / LRV 19,82




7072 L 43,24 / LRV 13,32
 7231 L 31,09 / LRV 6,69
 7944 L 41,42 / LRV 12,13

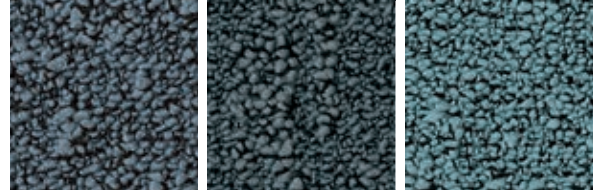

8813 L 39,46 / LRV 10,93
 8822 L 36,27 / LRV 9,15
 8834 L 46,76 / LRV 15,84

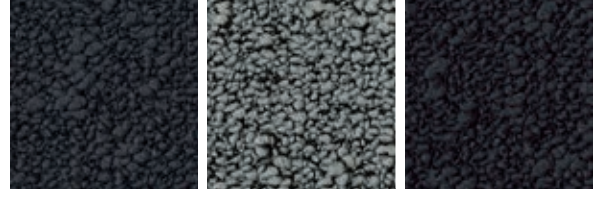


8901 L 23,58 / LRV 3,97
 8904 L 41,98 / LRV 12,48
 9021 L 20,61 / LRV 3,14

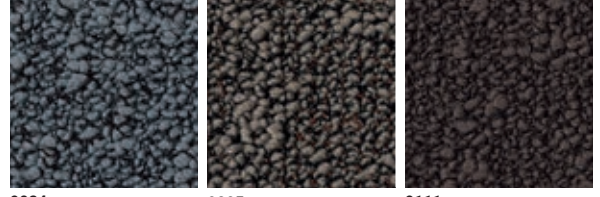

9024 L 23,32 / LRV 9,17
 9095 L 36,35 / LRV 9,19
 9111 L 25,63 / LRV 4,62



9515 L 52,04 / LRV 20,18
 9522 L 28,20 / LRV 5,53
 9945 L 43,08 / LRV 13,21



9980
 L 31,61 / LRV 6,91