

VCT


TECHNICAL DATA

Classification	Standards	VCT	
Classification	ASTM F1066	Vinyl Composition Tile - Commercial Use Class 2 Through Pattern	
	ISO 10595	Type II	
Technical characteristics			
Total thickness	ASTM F 386	2 mm (5/64 in.) 3 mm (1/8 in.)	
Wear Layer	ASTM F1066	Chip Through Pattern	
Total weight	-	4242 g/m² - 21 kg/box	
Surface treatment (PUR)	-	Yes	
Form of delivery	Tiles	2 mm 30 x 30 cm	55 tiles / box (4.95m2) 72 boxes/pallet (356.4 m2) 12 pallets / 20' container (4,277 m2)
		3 mm 30 x 30 cm	37 tiles / box (3.32m2) 72 boxes/pallet (239 m2) 12 pallets / 20' container (2,868 m2)
		3 mm 45 x 45 cm	16 tiles / box (3.24m2) 72 boxes/pallet (233 m2) 12 pallets / 20' container (2,799 m2)
Technical performance			
Thickness	ASTM F 386	Nominal ± 0.005	
Size	ASTM F 2055	± 0.016 in. per linear foot	
Squareness	ASTM F 2055	0.010 in. max	
Indentation-One Minute	ASTM F 1914	≥ 0.006 in. to ≤ 0.015 in.	
Indentation-115°F	ASTM F 1914	< 0.032 in.	
Impact	ASTM F 1265	No cracks beyond limit	
Deflection	ASTM F 1304	1.0 in. minimum	
Dimensional Stability	ASTM F 2199	≤ 0.024 in. per linear foot	
Chemical Resistance	ASTM F 925	No more than slight change in surface dulling, attack or staining	
Resistance to Heat	ASTM F 1514	ΔE not greater than 8.0	
Static Load Resistance	ASTM F 970	≤ 0.005 in.	


The above information is subject to modification for the benefit of further improvement (12/2020).
For the latest information, please visit our website: www.Tarkett-asia.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.




Naturalia

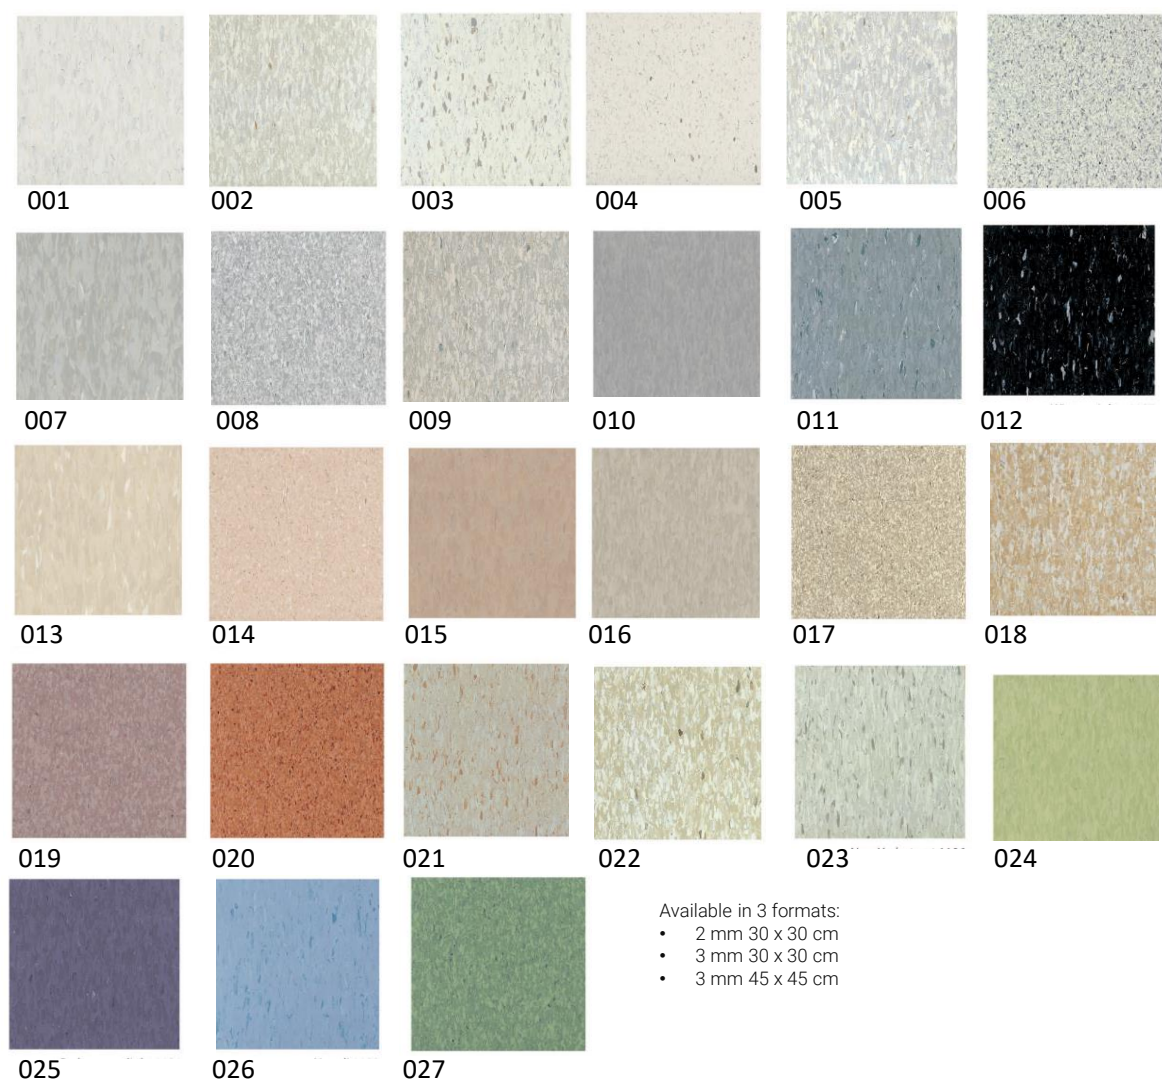

Pastelito

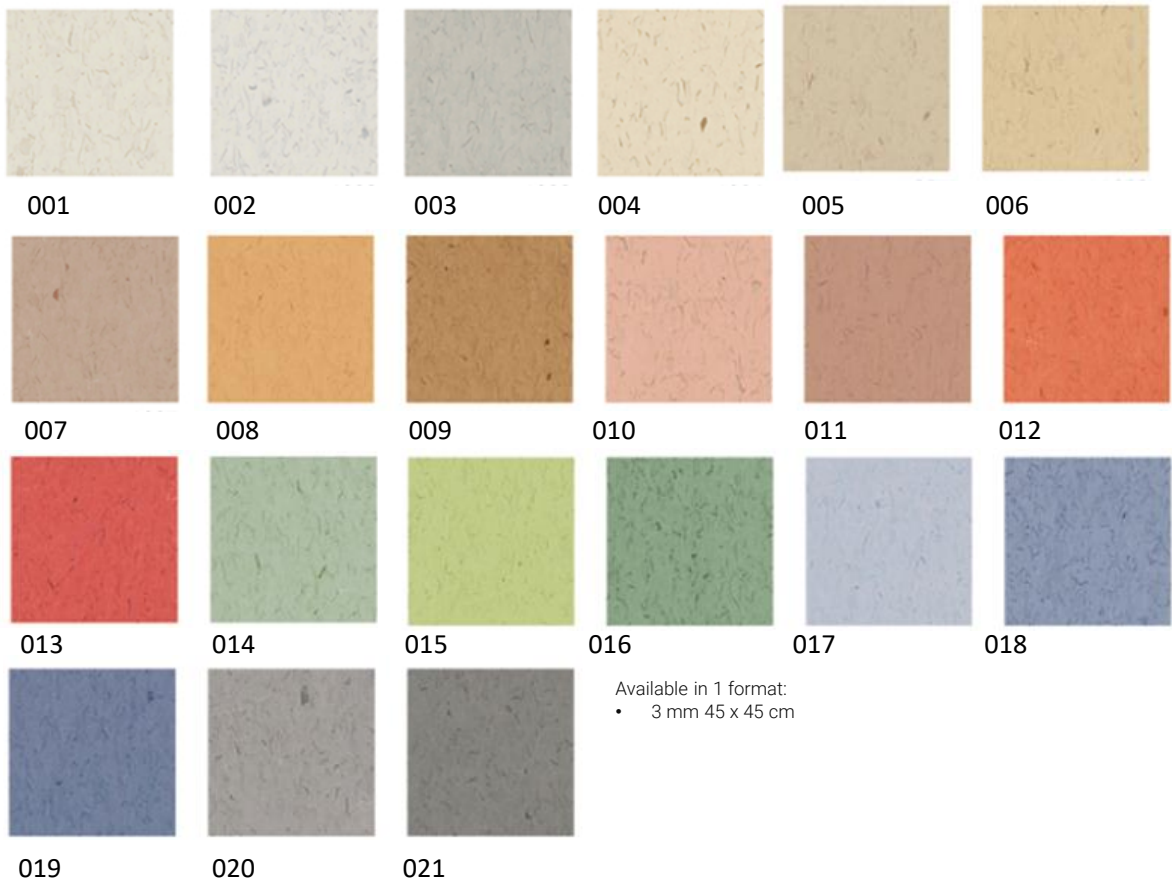

Conductivity



001



002

Available in 1 format:

- 3 mm 45 x 45 cm

Electrical Characteristics

Critical Radiant Flux	ASTM E 648	1.1 watts/cm ²
Surface resistance	ASTM F 150	2.5 x 10 ⁴ - 1.0 x 10 ⁶ Ω, 500V