


### DESCRIPTION


Durable aluminum threshold designed for seamless transitions between floor coverings while covering the peripheral expansion gap in sports flooring systems.

Features side recessed drilling with a 150mm spacing for secure installation.  
Supplied with Ø 3.5 mm Torx screws and plugs for added convenience.

Compatible with Omnisports, S'Match-it, and Lumaflex flooring solutions.

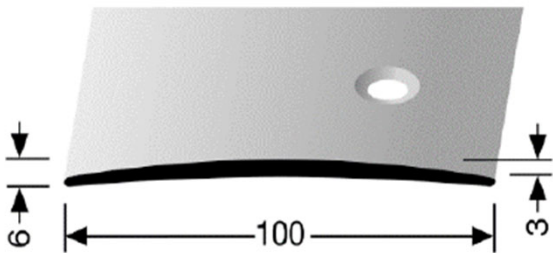

PROPERTIES	STANDARDS	ALUMINUM THRESHOLD
TECHNICAL CHARACTERISTICS		
Length	-	2700mm
Width	-	100mm
Height	-	6mm
Thickness	-	3mm
Composition	-	Aluminum
PACKAGING		
Quantity per box	-	10 units or 27ml
Minimum order	-	1 box
TECHNICAL DRAWING		



### INSTALLATION

The thresholds must be screwed to a flat, hard, dry, load-bearing surface. If necessary, cut the profile with a circular saw fitted with a blade suitable for cutting aluminum.

*Technical data in force as from the date of publication (09/2024).  
The values above are subject to modifications for the benefit of further improvement.  
Non-contractual photos.  
For more detailed technical information, please contact Tarkett Sports.  
Colors of the products shown in the photos or samples are indicative only. There may be differences in color, gloss and embossing structure between the products sold and photos or samples.*