


## DESCRIPTION

Tarkolay is a resilient membrane made of PVC coated glass fibre with studs designed to act as a moisture barrier for Omnisports floorings installations.

It does so by prohibiting the formation of vapor pressure between the concrete subfloor and flooring above.

Ready-to-use solution for Omnisports installation on subfloors with humidity rate up to 7% CCM..

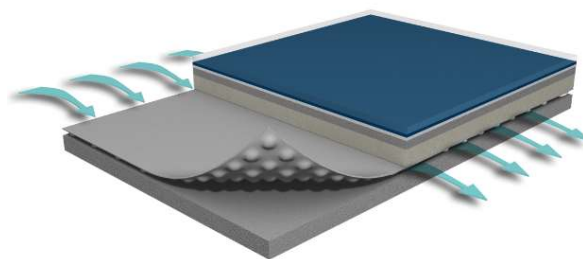

PROPERTIES	STANDARDS	TARKOLAY SPORT
<b>CLASSIFICATION</b>		
Type of floor covering	-	Vinyl floorcovering on non-woven glass fibre Underlayer with studs on backside
<b>TECHNICAL CHARACTERISTICS</b>		
Total thickness	ISO 24346 (EN 428)	1.3 mm
Studs thickness	ISO 24346 (EN 428)	0.3 mm
Total weight	ISO 23997 (EN 430)	1350 g/m <sup>2</sup>
Width	ISO 24341 (EN 426)	2 m
Length	ISO 24341 (EN 426)	45 m
Surface texture	-	Smooth
Backing texture	-	Dimpled
Color	-	Grey
<b>TECHNICAL PERFORMANCES</b>		
Dimensional stability	ISO 23999 (EN 434)	Length/ width <0.10%
Reaction to fire	EN 13501-1	Cfl-s1*
<b>PACKAGING</b>		
Roll diameter	-	35 cm
Roll weight (with chuck)	-	136 kg
Rolls per pallet	-	10 rolls
Pallet size	-	2.03m length x 1.11m width x 0.1m height
Pallet weight	-	1390 kg
Minimum order	-	1 roll

\* glued installation with Omnisports

Installation guides available on Tarkett Sport Indoor website

Technical data in force as from the date of publication (09/2025).

The values above correspond to laboratory test (no in situ test) and are subject to modifications for the benefit of further improvement.

For more detailed technical information, please contact Tarkett Sports.

Colors of the products shown in the photos or samples are indicative only. There may be differences in color, gloss and embossing structure between the products sold and photos or samples.