

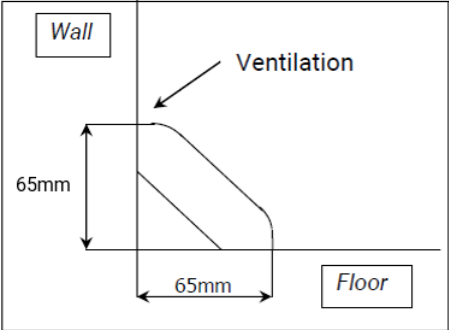
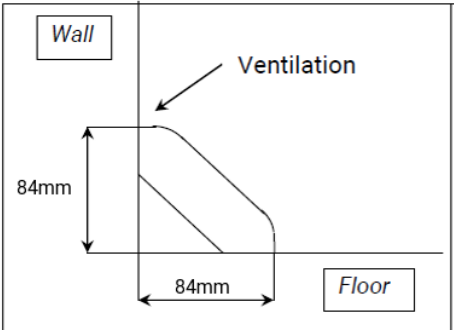



DESCRIPTION	Oak	Beech
Specific solid wood varnished skirting with spaces made to allow cross ventilation of the wood flooring or sub-construction. For S'Match-it, Lumaflex ranges and Omnisports when installed with GreenLay™ method.		


CHARACTERISTICS		
	STANDARD	WIDE
Wood species	Oak - 1551067 Beech - 1551065	Oak - 1551068 Beech - 1551066
Dimensions	Thickness: 22mm Width: 65 mm Length: 2350mm	Thickness: 27mm Width: 84 mm Length: 2350mm
Finishing	Varnished	

TECHNICAL DRAWING	
STANDARD	WIDE
	

INSTALLATION
USE
<p>Tarkett Sports ventilated wooden skirting are designed to cover expansion gap (and allow the ventilation of the floor) of sports floorings and bring exclusive finishing.</p> <p>Warning: the opening all along the skirting let the air circulate, it will always be placed against the wall</p> 
FIXING

Skirting should be fixed on the wall (never on the floor) with screws (5.0 x 100mm)

For uneven walls skirtings can be glued in addition to screws for perfect finishing



*Technical data in force as from the date of publication (09/2024).
The values above correspond to laboratory test (no in situ test) and are subject to modifications for the benefit of further improvement.
For more detailed technical information, please contact Tarkett Sports.
Colors of the products shown in the photos or samples are indicative only. There may be differences in color, gloss and embossing structure between the products sold and photos or samples.*