

Heritage

Green Building Card

SUSTAINABILITY ATTRIBUTES

Circular Economy and Climate Change




Good Materials



Indoor Air Quality



LIFE CYCLE ASSESSMENT

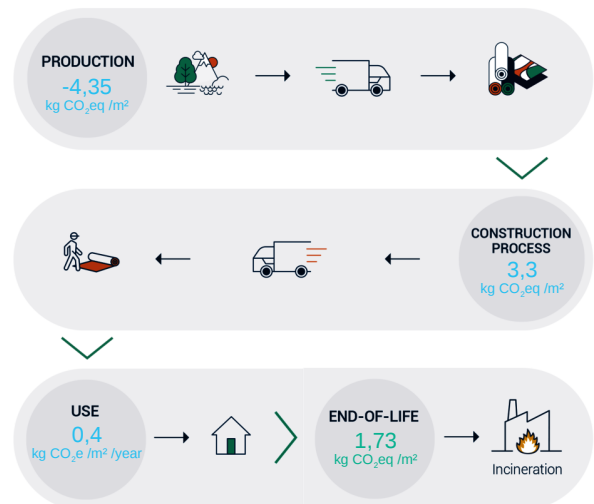

TOTAL CARBON FOOTPRINT 1,07 kg CO₂eq /m²

Product life span = 50 years

The value shown in this document is the most representative for the collection and some products might have other values. Details available on www.tarkett.com
 LCA Information above is based on the product's Environmental Product Declaration (EPD)
 EPD Number : S-P-06627
 EPD comparison should be conducted by experts only



CONTRIBUTION TO GREEN BUILDING CERTIFICATIONS

BREEAM INTERNATIONAL NEW CONSTRUCTION 2016

BREEAM®

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
HEA 01 - Visual Comfort	Best practices in daylighting and artificial lighting design <i>No specific requirement at product level</i>	
HEA 02 - Indoor Air Quality	TVOC at 28 days $\leq 1000 \mu\text{g}/\text{m}^3$ and Formaldehyde at 28 days $\leq 60 \mu\text{g}/\text{m}^3$	
MAT 01 - Life Cycle Impacts	EPDs available	
MAT 03 - Responsible Sourcing of Construction Products	ISO 14001 certified	
WST 06 - Functional Adaptability	Encourage building adaptability <i>No specific requirement at product level</i>	

LEED v4.1 Building Design and Construction



CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
MR - Environmental Product Declarations	EPDs available	
MR - Sourcing of Raw Materials	Signatory of the UN Global Compact or Product composed of recycled content or Recyclable at end-of-life or Bio-sourced materials	
EQ - Low Emitting Materials and Indoor Air Quality Assessment	TVOC at 28 days $\leq 1000 \mu\text{g}/\text{m}^3$ and Formaldehyde at 28 days $\leq 10 \mu\text{g}/\text{m}^3$ Decrease the concentration of particles in the air	
EQ - Interior Lighting and Daylight	Best practices in daylighting and artificial lighting design <i>No specific requirement at product level</i>	

CONTRIBUTION TO GREEN BUILDING CERTIFICATIONS



WELL BUILDING STANDARD v2

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
L02 - Visual Lighting Design and L 06 - Daylight Simulation	Best practices in daylighting and artificial lighting design <i>No specific requirement at product level</i>	
X06 - VOC Restrictions	TVOC at 28 days $\leq 1000 \mu\text{g}/\text{m}^3$ and Formaldehyde at 28 days $\leq 124 \mu\text{g}/\text{m}^3$ (E1)	 

SKA RATING OFFICES 1.2

SKArating®

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Hard flooring	Recycled content > 25%- or Cradle to Cradle® certification at silver level or higher or EPDs available	
Low VOC finishes	TVOC at 28 days $\leq 100 \mu\text{g}/\text{m}^3$ and Formaldehyde at 28 days $\leq 10 \mu\text{g}/\text{m}^3$ or Ingredient disclosure	 
Daylighting	Best practices in daylighting design <i>No specific requirement at product level</i>	

DGNB System - New buildings Version 2020 International



CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
ENV1.1 - Building Life Cycle Assessment	EPDs available	
EC02.1 - Flexibility and Adaptability	Products that can be easily removed <i>No specific requirement at product level</i>	 
SOC1.2 - Indoor Air Quality	Indoor air quality measurement after construction work <i>No specific requirement at product level</i>	
SOC1.4 - Visual Comfort	Best practices in daylighting and artificial lighting design <i>No specific requirement at product level</i>	



CONTRIBUTION TO GREEN BUILDING CERTIFICATIONS



HQE BÂTIMENT DURABLE v4

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Qualité de l'air intérieur	Mesure de polluants dans l'air après travaux	
Confort Visuel	Bonnes pratiques sur l'éclairage naturel et artificiel <i>Pas d'exigence spécifique au niveau des produits</i>	



Green Star - Interiors v1.3

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Lighting and Visual Comfort	Best practices in daylighting and artificial lighting design <i>No specific requirement at product level</i>	
Life Cycle Assessment	EPDs available	



MILJÖBYGGNAD

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Indicator 14 (V3.0 & 3.1) Indicator 9 (V4.0)	Hazardous classified below CLP guidelines TVOC at 28 days $\leq 1000 \mu\text{g}/\text{m}^3$ Formaldehyde at 28 days $\leq 10 \mu\text{g}/\text{m}^3$	  <i>See available eBVD for Swedish adaptation.</i>