

iD Click Ultimate 55-70

Green Building Card

SUSTAINABILITY ATTRIBUTES

Circular Economy and Climate Change




Indoor Air Quality



LCA Information above is based on the product's Environmental Product Declaration (EPD)
EPD Number : S-P-03331
EPD comparison should be conducted by experts only

LIFE CYCLE ASSESSMENT

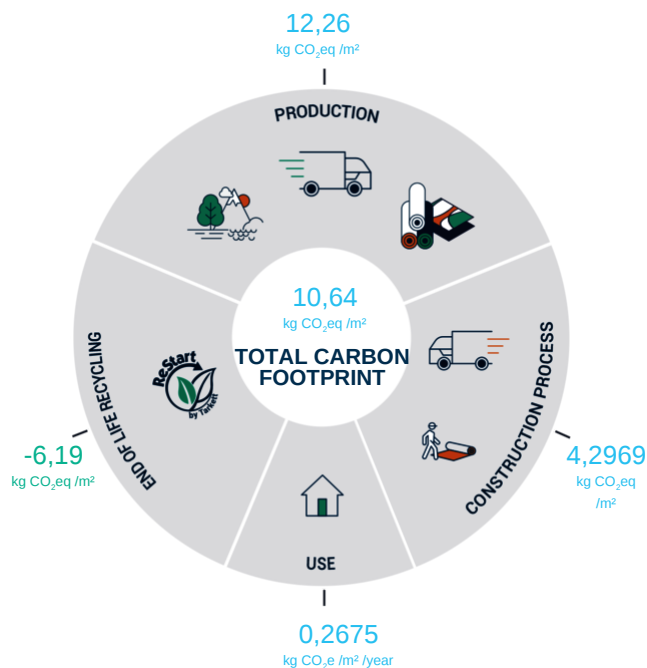

Product life span = 25 years



CONTRIBUTION TO GREEN BUILDING CERTIFICATIONS

BREEAM®

BREEAM INTERNATIONAL NEW CONSTRUCTION 2016

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
MAN 02 - Life Cycle Cost and Service Life Planning	Encourage the use of life cycle costing No specific requirement at product level	 LIFE CYCLE COST
HEA 01 - Visual Comfort	Best practices in daylighting and artificial lighting design No specific requirement at product level	 VISUAL COMFORT
HEA 02 - Indoor Air Quality	TVOC at 28 days $\leq 1000 \mu\text{g}/\text{m}^3$ and Formaldehyde at 28 days $\leq 60 \mu\text{g}/\text{m}^3$	  LOW FORMALDEHYDE EMISSIONS  floor score  VOC $\leq 10 \mu\text{g}/\text{m}^3$ OPTIMAL INDOOR AIR QUALITY
MAT 01 - Life Cycle Impacts	EPDs available	 EPD®
MAT 03 - Responsible Sourcing of Construction Products	ISO 14001 certified	 ENVIRONMENTAL MANAGEMENT SYSTEM ISO 14001
MAT 06 - Material Efficiency	Ingredients verified by a third party or Product composed of recycled content	 MHS MATERIAL · HEALTH · STATEMENT  20% RECYCLED CONTENT
WST 01 - Waste Management	Avoid sending waste to landfill No specific requirement at product level	 RECYCLABLE OFFCUTS & POST-USE  Restart Ready
WST 06 - Functional Adaptability	Encourage building adaptability No specific requirement at product level	 GLUE FREE INSTALLATION  MODULAR PRODUCTS

CONTRIBUTION TO GREEN BUILDING CERTIFICATIONS



LEED v4.1 Building Design and Construction

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
MR - Environmental Product Declarations	EPDs available	EPD®
MR - Sourcing of Raw Materials	Signatory of the UN Global Compact or Product composed of recycled content or Recyclable at end-of-life or Bio-sourced materials	  
MR - Material Ingredients	Ingredients verified by a third party or Cradle to Cradle® certification at bronze level or higher	MHS OF 2015 MATERIAL · HEALTH · STATEMENT
MR - Construction and Demolition Waste Management	Avoid sending waste to landfill No specific requirement at product level	 
EQ - Low Emitting Materials and Indoor Air Quality Assessment	TVOC at 28 days $\leq 1000 \mu\text{g}/\text{m}^3$ and Formaldehyde at 28 days $\leq 10 \mu\text{g}/\text{m}^3$ Decrease the concentration of particles in the air	   
EQ - Interior Lighting and Daylight	Best practices in daylighting and artificial lighting design No specific requirement at product level	VISUAL COMFORT

CONTRIBUTION TO GREEN BUILDING CERTIFICATIONS



WELL BUILDING STANDARD v2

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
L02 - Visual Lighting Design and L 06 - Daylight Simulation	Best practices in daylighting and artificial lighting design No specific requirement at product level	VISUAL COMFORT
S07 - Impact Noise Management	Best practices in impact noise reduction No specific requirement at product level	19dB IMPACT NOISE REDUCTION
X01, X02 and X05 - Material Restrictions, Interior Hazardous Materials Management and Enhanced Material Restrictions	Asbestos 1000 ppm Halogenated flame retardants 100 ppm PFAS 100 ppm Lead 100 ppm Cadmium 100 ppm Mercury 100 ppm Orthophthalates 100 ppm Higher amounts are allowed if required by local code	MHS Verify compliance according to chemicals displayed in MHS. Evaluation threshold at least 100 ppm (0.01%) of the final product.
X06 - VOC Restrictions	TVOC at 28 days $\leq 1000 \mu\text{g}/\text{m}^3$ and Formaldehyde at 28 days $\leq 124 \mu\text{g}/\text{m}^3$ (E1)	FLOOR SCORE VOC $\leq 10 \mu\text{g}/\text{m}^3$ OPTIMAL INDOOR AIR QUALITY
X07 - Materials Transparency	Ingredients verified by a third party or Cradle to Cradle® certification at bronze level or higher	MHS
X08 - Materials Optimization	Ingredients verified by a third party or Cradle to Cradle® certification at silver level or higher	MHS

SKA RATING OFFICES 1.2

SKArating®

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Soft flooring	Recycled content > 50% or Renewable or natural content > 50% or Cradle to Cradle® certification at silver level or higher or EPDs available	EPD®
Reduce floor finishes sent to landfill	Avoid sending waste to landfill No specific requirement at product level	RECYCLABLE OFFCUTS & POST-USE RESTART Ready
Low VOC finishes	TVOC at 28 days $\leq 100 \mu\text{g}/\text{m}^3$ and Formaldehyde at 28 days $\leq 10 \mu\text{g}/\text{m}^3$ or Ingredient disclosure	FLOOR SCORE MHS VOC $\leq 10 \mu\text{g}/\text{m}^3$ OPTIMAL INDOOR AIR QUALITY
Daylighting	Best practices in daylighting design No specific requirement at product level	VISUAL COMFORT



CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
ENV1.1 - Building Life Cycle Assessment	EPDs available	
ENV1.2 - Local Environment Impact	Textile flooring - Quality level 4 TVOC < 100 µg/m ³ after 28 days SVHC ≤ 0,1% Biocidal products only in accordance with 528/2012/EC Resilient flooring - Quality level 4 TVOC < 300 µg/m ³ after 28 days Chlorinated paraffins < 0,1% SVHC ≤ 0,1%	  Verify compliance according to chemicals displayed in MHS. Evaluation threshold at least 100 ppm (0.01%) of the final product. Manufacturer declaration may also be provided - contact TARKETT's sales representative.
ENV1.3 - Sustainable Resource Extraction	Product composed of open-loop or post-consumer recycled content	
ENV2.2 - Potable Water Demand and Waste Water Volume	Encourage the reduction of potable water demand No specific requirement at product level	
EC01.1 - Life Cycle Cost	Encourage the use of life cycle costing No specific requirement at product level	
EC02.1 - Flexibility and Adaptability	Products that can be easily removed No specific requirement at product level	 
SOC1.2 - Indoor Air Quality	Indoor air quality measurement after construction work No specific requirement at product level	 
SOC1.3 - Acoustic Comfort	Best practices in impact noise reduction No specific requirement at product level	
SOC1.4 - Visual Comfort	Best practices in daylighting and artificial lighting design No specific requirement at product level	
TEC1.5 - Ease of Cleaning Building Components	Verifiable results in reduced life cycle costs for cleaning No specific requirement at product level	 
TEC1.6 - Ease of Recovering and Recycling	Efficient use of resources	 

CONTRIBUTION TO GREEN BUILDING CERTIFICATIONS



HQE BÂTIMENT DURABLE v4

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Qualité de l'air intérieur	Mesure de polluants dans l'air après travaux	  
Confort Acoustique	Bonnes pratiques sur l'acoustique au sein d'une pièce et entre pièces Pas d'exigence spécifique au niveau des produits	 
Confort Visuel	Bonnes pratiques sur l'éclairage naturel et artificiel Pas d'exigence spécifique au niveau des produits	
Eau	Limiter la consommation d'eau potable Pas d'exigence spécifique au niveau des produits	
Déchets	Enviter l'envoi à la décharge Pas d'exigence spécifique au niveau des produits	 
ACV	Calcul des impacts environnementaux de l'opération selon la RE2020	
Maitrise des coûts	Encourager l'utilisation d'une analyse en coût global Pas d'exigence spécifique au niveau des produits	
Economie locale	Composant issu d'une filière de valorisation matière des déchets	

CONTRIBUTION TO GREEN BUILDING CERTIFICATIONS



Green Star - Interiors v1.3

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Indoor Pollutants	TVOC at 28 days $\leq 1000 \mu\text{g}/\text{m}^3$ and Formaldehyde at 28 days $\leq 10 \mu\text{g}/\text{m}^3$	 
Lighting and Visual Comfort	Best practices in daylighting and artificial lighting design No specific requirement at product level	
Life Cycle Assessment	EPDs available	
Construction and Demolition Waste	Avoid sending waste to landfill No specific requirement at product level	 

MILJÖBYGGNAD

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Indicator 13 (V3.0 & 3.1) Indicator 15 (V4.0)	Composition declared according to CLP/REACH None classified compounds are publicly declared if they make up $>2\%$ of composition	 See available eBVD for Swedish adaptation.
Indicator 14 (V3.0 & 3.1) Indicator 9 (V4.0)	Hazardous classified below CLP guidelines TVOC at 28 days $\leq 1000 \mu\text{g}/\text{m}^3$ Formaldehyde at 28 days $\leq 10 \mu\text{g}/\text{m}^3$	   See available eBVD for Swedish adaptation.
Indicator 13 (V4.0)	At least 20% recycled content	